


## Ventilation

### 29" Custom Insert Hood Specialty Ventilation DHL755BUC

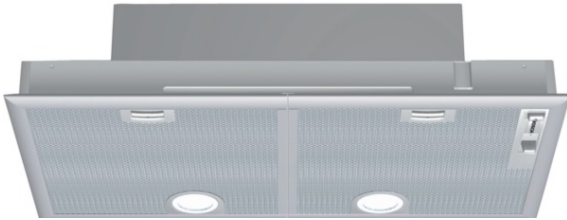

#### Technical Data

Operating Mode :	Ducted
Number of speed settings :	3-stage
Number of lights :	2
Type of lamps used :	Halogen
Total power of the lamps (W) :	40
Grease filter material :	Washable aluminium
Grease filter type :	Multilayer cassette
UPC code :	825225853299
Watts (W) :	270
Volts (V) :	120
Frequency (Hz) :	60
Approval certificates :	ETL
Power cord length (cm) :	150
Plug type :	120V-3 prong
Overall appliance dimensions (HxWxD) (in) :	
	6 1/4 " / x 28 11/16 " x 15
Overall appliance dimensions (HxWxD) (mm) :	
	159 MM x 730 x 380
Product packaging dimensions (HxWxD) (in) :	
	11.81 x 31.49 x 17.32
Required distance above cooktop/ranges :	30 "/30 "
Net weight (lbs) :	23
Net weight (kg) :	10.0
Gross weight (lbs) :	26
Gross weight (kg) :	12.0
Motor location :	Integrated motor in hood body
Maximum CFM :	400
No-return airflow flap :	No

## Ventilation

### **29" Custom Insert Hood Specialty Ventilation DHL755BUC**

---

#### **Key Features**

- 400 CFM Blower Included
- 2 Halogen Lights
- Wall or Island Installations Up to 36" Wide

#### **Design**

- Wall or Island Installations Up to 36" Wide
- 2 Halogen Lights

#### **Performance**

- 400 CFM Blower Included
- Four Power Levels
- Quickly and Quietly Clears the Air of Smoke and Odor

#### **Convenience**

- Dishwasher-safe Mesh Filters
- Slide-Switch Control

## Ventilation

### 29" Custom Insert Hood Specialty Ventilation DHL755BUC

