



### Broan B59000 Series

Gently curving metal canopy creates a dramatic, contemporary appearance and an open, airy feel.


- 36" Island range hood
- Brushed stainless steel finish
- Push-button control
- Four 20-watt halogen lights (included)
- Single 450 CFM centrifugal blower
- Dishwasher-safe aluminum filters feature a quick-release latch and professional style appearance
- Convertible for ducted or non-ducted installation (non-ducted kit RK59 sold separately)
- Telescopic flue accommodates 8' to 9' ceilings
- 6" round duct connection / backdraft damper
- Minimum hood distance above cooktop must not be less than 30"

#### SPECIFICATIONS

WIDTH	STAINLESS STEEL	VOLTS	AMPS	CFM Max/Min	SONES Max/Min	DUCT
36"	B5936SS	120	3.3	450/200	8.5/2.5	6" round

#### OPTIONS

S97018029	Replacement filters
FXN59SS	Flue extension for 10' ceiling
RK59	Non-ducted kit
S99527023	Non-ducted filter
ARP6	Air flow reducer (limits the airflow of the hood under 300 CFM)

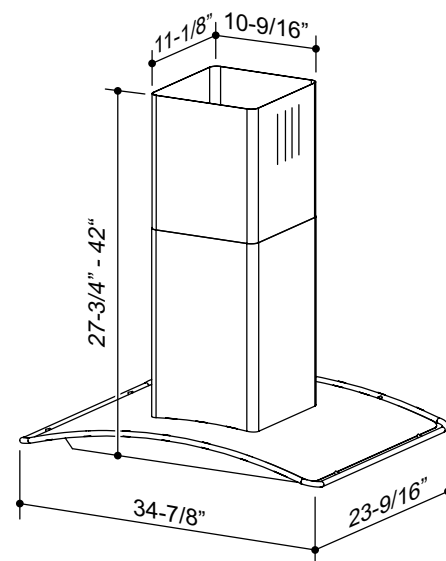


### SPECIFICATIONS


MODEL	B59000 SERIES
VOLTS	120 VAC
Hz	60
AMPS	3.3
CFM (HIGH SPEED)	450*
CFM (LOW SPEED)	190
SONES (HIGH SPEED)	8.5
SONES (LOW SPEED)	2.5
DUCTING SIZE	6" ROUND
4 HALOGEN BULBS	TYPE JC, 20 W, 12 V WITH G4 BASE
WARRANTY	1 YEAR

\*OPTIONAL ARP6 AIR FLOW REDUCER (LIMITS THE AIRFLOW OF THE HOOD UNDER 300 CFM).

### DIMENSIONS

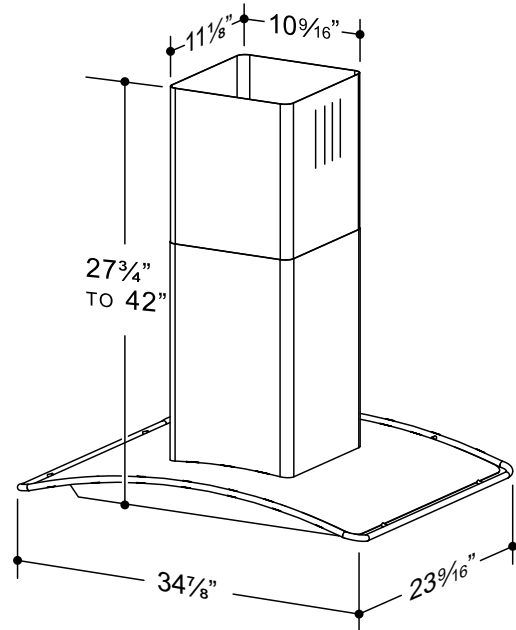

### AIR FLOW PERFORMANCE

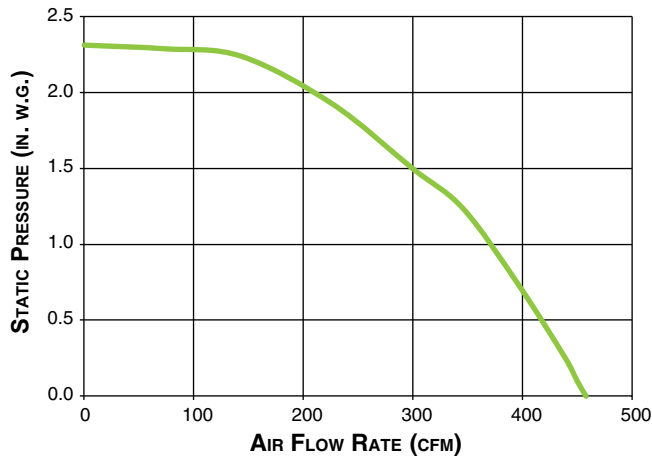

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



BROAN-NU-TONE CANADA INC., MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

PROJECT	REMARKS
LOCATION	
MODEL No.	
QTY.	
SUBMITTED BY	
DATE	