


E55000 SERIES RANGE HOOD

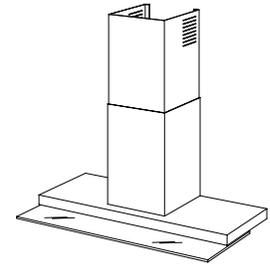

Slim, understated wall-mounted design makes a statement without sacrificing functionality. A slide-out glass panel expands capture area and is virtually hidden when not in use.

FEATURES

- Professional style design
- 430 stainless steel #4 brushed construction
- Wall mount installation
- Ducted/non-ducted telescopic flue - fits 8 ft. to 9 ft. ceilings
- 6" round duct connector/backdraft damper
- 360 cfm three-speed centrifugal blower
- Push-button blower and lighting controls
- Dual halogen lighting (2 x 20 W, Type JC, 12 V, 20 W, G4 base - bulbs included)
- Dishwasher-safe aluminum filter features a quick-release latch
- Available size: 35-7/16"
- Heat Sentry - automatically turns blower to high speed when excess cooking heat is detected

OPTIONS

- Replacement aluminum grease filters available (Model B08087092)
- Non-ducted recirculation kit (Model RK55)
- Replacement charcoal filter (Model FILTERSQUARE)
- Flue extension for 10 ft. ceiling, model FX55SS (ducted applications), model FXN55SS (non-ducted applications) (31-1/12" long)

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	2.63	(HIGH) 360	6.5	6" round
		(LOW) 140	0.7	



Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

Broan-NuTone Canada, Inc., 1140 Tristar Drive, Mississauga, Ontario, L5T 1H9 (1-888-882-7626)

TYPICAL SPECIFICATION

Range hood shall be Broan E55000 Series.

Unit shall be convertible between ducted (using a washable aluminum filter) and non-ducted (using a recirculation kit).


Motor to be permanently lubricated.

Unit shall have three-speed fan switch and separate light switch.

Air delivery shall be no less than 360 CFM.

Unit shall be U.L. and cUL listed.


Dimensions below are in inches.

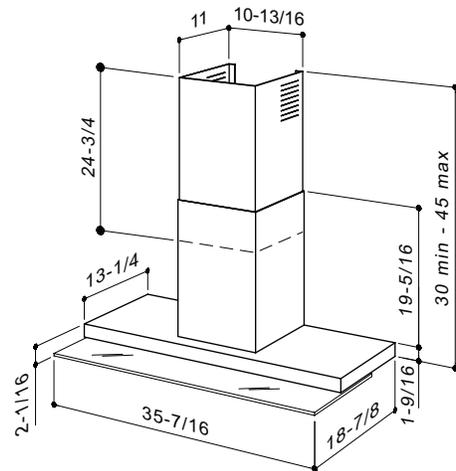


HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

E55000 SERIES WIRING

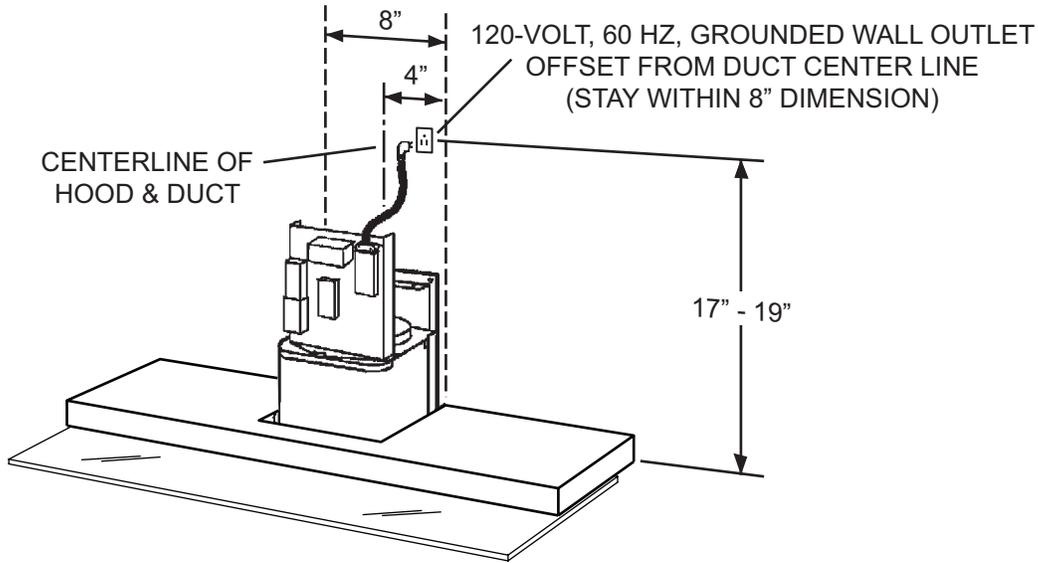

E55000 SERIES MOUNTING

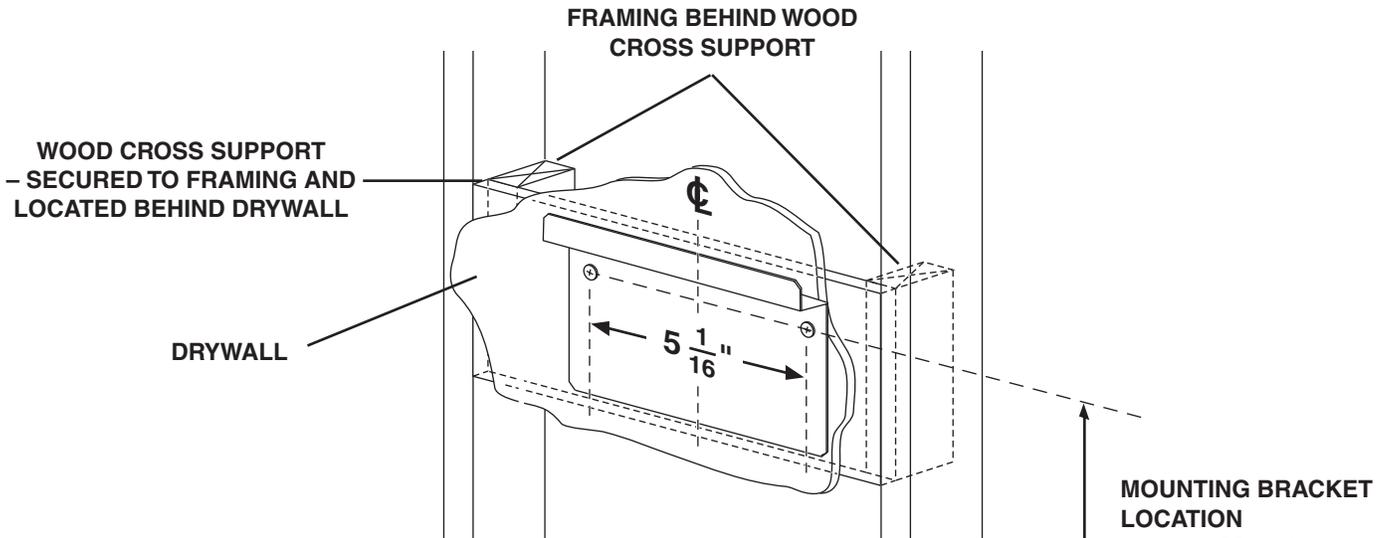

CEILING HEIGHT	HOOD DISTANCE ABOVE 36" HIGH COOK TOP (see note a)						
	24"	25"	26"	27"	28"	29"	30"
	MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP						
8-FOOT	37-1/8"	38-1/8"	39-1/8"	40-1/8"	41-1/8"	42-1/8"	43-1/8"
9-FOOT				40-1/8"	41-1/8"	42-1/8"	43-1/8"
10-FOOT (see note b)		38-1/8"	39-1/8"	40-1/8"	41-1/8"	42-1/8"	43-1/8"

NOTES:

- a. Minimum hood distance above cooktop must not be less than 24".
 A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.
 Distances over 30" above the cooktop are at the installer's and user's discretion - providing that ceiling height and flue length permit.
- b. Requires optional 10-foot flue extension model FX55SS (ducted) or FXN55SS (non-ducted).

