





Broan Elite brings another innovation with a new, stylishly retro power pack. Its unique features—including rounded baffle filters—give a classy retro spin to modern decors.

- Power packs for custom application—cabinet mount
- Brushed stainless steel finish
- 281/8" width (to accomodate 30" cabinet space)
- Electronic push button controls with LED
- Four ventilation speeds
- Three intensities halogen lighting: two GU10, 50 W shielded bulbs (included)
- 5-minute Delay function
- Dishwasher-safe thin baffle filters

- Filter maintenance indicator
- Heat Sentry<sup>™</sup> detects excessive heat and adjusts speed to high automatically
- Custom hood liners available in option (protect the exterior base of the custom hood)
- Clasping springs to ease installation
- 31/4" x 10" (EC621306SS) or 10" round (EC622301SS) ducted discharge, vertical or horizontal\*





#### **SPECIFICATIONS**

L6242SS

ARP310\*

WIDTH	STAINLESS STEEL	BLOWER	VOLTS	AMPS	CFM	SONES	DUCT	
281/8"	EC621306SS	Single	120	6	600	1.1	31/4" x 10" (V-H)	
281/8"	EC622301SS	Dual	120	9.5	1000	1.5	10" round (V)	
OPTIONS								
L6230SS Liner for 30" width custom hood								
L6236SS	S Liner for 36" width custom hood							

Air flow reducer (limits the airflow of the hood under 300 PCM)

Liner for 42" width custom hood







<sup>\*</sup> For EC621306SS model only




# SPECIFICATION SHEET EC62 SERIES

## **SPECIFICATIONS**

Model	EC621306SS	EC622301SS	
BLOWER	SINGLE	DUAL	
Volts	120 VAC	120 VAC	
Hz	60	60	
Amps	6.0	9.5	
CFM (HIGH SPEED)	600*	1000	
CFM (LOW SPEED)	210	370	
Sones (HIGH SPEED)	8.5	12.0	
Sones (LOW SPEED)	1.1	1.5	
DUCTING SIZE	3¼" x 10"	10" Round	
2 SHIELDED HALOGEN BULBS	120 V, 50 W MAX., WITH GU10 BASE	120 V, 50 W MAX., WITH GU10 BASE	
WARRANTY	1 YEAR	1 YEAR	


<sup>\*</sup>OPTIONAL ARP310 AIR FLOW REDUCER (LIMITS THE AIRFLOW OF THE HOOD UNDER 300 CFM).


## **DIMENSIONS**




NOTE: The dual blower model has the same dimensions than the single blower model, but doesn't have an horizontal discharge. Refer to EC621306SS illustration above for back and side dimensions, and discard horizontal discharge measurements.

## AIR FLOW PERFORMANCE

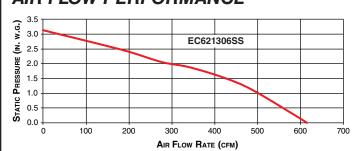



### EC622301SS





HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



### BROAN-NUTONE CANADA INC., MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

Рпојест	REMARKS
Location	
Model No.	
QTY.	
SUBMITTED BY	
DATE	