

Café™ Energy Star® 22.2 Cu. Ft. Counter-Depth French-Door Refrigerator with Keurig® K-Cup® Brewing System

CYE22UP2MS1

C A F É

DISTINCT BY DESIGN™



CYE22UP2MS1
Stainless Steel with
Brushed Stainless handles



FEATURES & BENEFITS

Brew your favorite morning latte or cappuccino from a **Keurig K-Cup brewing system** built directly into the refrigerator.

Steep a relaxing herbal tea or prepare light & fluffy couscous with an adjustable **hot water dispenser** that provides precise temperatures and measurements.

Use your voice or **smart device** to preheat water from your refrigerator while you relax in another part of the house.

Create a built-in look with **counter-depth design** that fits flush with surrounding cabinetry.

Leave the measuring cups in the drawer with a **Precise Fill setting** that dispenses an exact amount of water with just a touch.

Food remains fresh longer with **TwinChill™ evaporators** that accurately maintain and control separate freezer and refrigerator environments.

Keep key ingredients fresh and within sight with a full-width, electronic, **temperature-controlled drawer** that uses an LED colored lighting system.

Display groceries like a gallery with **showcase LED lighting** positioned throughout the interior to spotlight your favorite foods and containers.

APPEARANCE

Counter-depth design	Yes
Exterior design	Flat doors
Handle design	GE Café
Hidden door hinge(s)	Yes
Textured steel case	Case only—Dark gray

FEATURES

Configuration	French door
WiFi connect	Built-in
Connected capabilities	Amazon Alexa The Google Assistant IFTTT
Temperature management features	Turbo Cool setting
Temperature management system	TwinChill™ evaporators
Defrost type	Frost Guard
Control type	External touch color LCD
Dispenser	Large stainless steel cubes, crushed ice and water
Dispenser features	Hot water Precise Fill LCD screen controls USB port for photo upload Door alarm LED dispenser light Water filter indicator light
Icemaker	Space saving ice
Water filtration	Advanced filtration system (RPWFE); Removes pharmaceuticals
Filter location	Water filter indicator light Left wall
Fresh food cabinet drawers	3 total 2 adjustable humidity drawers 1 full-width, adjustable temperature with LED light
Fresh food cabinet shelves	5 total—glass with silver trim 4 split adjustable 1 full-width 3 spill proof 1 Quick Space shelf
Fresh food door bins	6 total (4 stainless steel design) 2 adjustable 3 with gallon storage
Fresh food door features	Dairy compartment Drop down tray
Fresh food features	Showcase LED lighting (7); Deli pan
Freezer door bins	1 tilt-out
Freezer storage baskets	2 full-width
Freezer features	Turbo Freeze; interior lighting—showcase LED (2)
Exterior style	Counter-depth
Leveling system	2 front leveling legs
Performance features	Easily removable door gaskets; Sabbath Mode capable

CAPACITY

Total capacity (cubic feet)	22.2 cu. ft.
Fresh food capacity	15.0 cu. ft.
Freezer capacity	7.2 cu. ft.

WEIGHTS & DIMENSIONS

Overall depth	31-1/4 in.
Overall height	69-7/8 in.
Overall width	35-3/4 in.
Case depth without door	24-3/8 in.
Depth with door open 90°	43-3/8 in.
Depth without handle	29-3/4 in.
Height to top of case	69 in.
Width with door open 90° including handle	44-3/4 in.
Approximate shipping weight	398 lb.
Net weight	365 lb.


Café™ Energy Star® 22.2 Cu. Ft. Counter-Depth French-Door Refrigerator with Keurig® K-Cup® Brewing System

CYE22UP2MS1

WARRANTY

Parts warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Labor warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Warranty notes	See written warranty for full details

DIMENSIONS

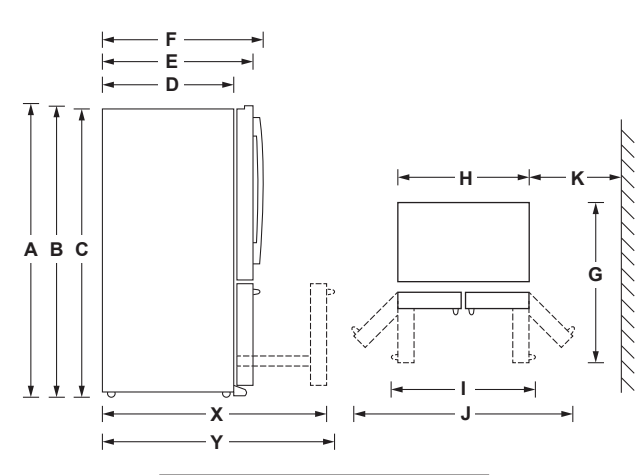

Height to top of door (in.) A	70-1/2
Height to top of hinge (in.) B	69-7/8
Height to top of case (in.) C	69
Case depth without door (in.) D**	24-3/8
Case depth less door handle (in.) E**	29-3/4
Case depth with door handle (in.) F**	31-1/4
Depth with fresh food door open 90° (in.) G**	43-3/8
Width (in.) H	35-3/4
Width with door open 90° with door handle (in.) I	44-3/4
Width with doors open fully (in.) J	61-5/8
Min distance between side of case and wall, in either direction, to allow doors to open fully (in.) K	13-1/8
Depth with FZ door completely open (w/o handle) (in.) X	44-1/4
Depth with FZ door completely open (w/ handle) (in.) Y	46-3/4

*Includes hot water knob.
**Water hookup fits in back air clearance when calculating installation depth.

ADDITIONAL ACCESSORIES

CXLB3H3PMBZ Brushed Bronze 3 handles (Standard on Matte White)	CXLB3H3PMSS Brushed Stainless 3 handles (Standard on Matte Black and Stainless Steel)	CXLB3H3PMBT Brushed Black 3 handles	CXLB3H3PMCU Brushed Copper 3 handles	CXMA3H3PNFB Flat Black 3 handles	CXMA3H3PNCG Brushed Brass 3 handles