


# 30-Inch Warming Drawer

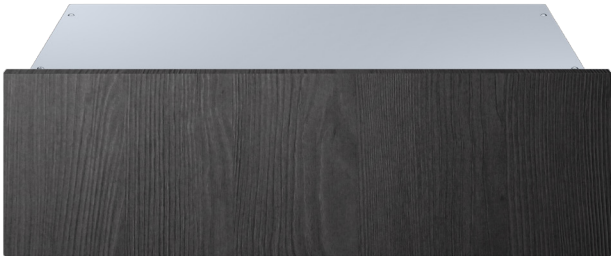

DWR30U900WP/DA – Panel Ready

| Features & Benefits                                                                                                                                        |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <ul style="list-style-type: none"><li>• 4 temperature levels</li><li>• 4 timer settings</li><li>• Electronic control panel</li><li>• Panel ready</li></ul> |                 |
| Controls                                                                                                                                                   |                 |
| CONTROL TYPE                                                                                                                                               | Tactile Control |
| KITCHEN TIMER                                                                                                                                              | Yes             |


| Warming Drawer                           |                            |
|------------------------------------------|----------------------------|
| CAPACITY (CU. FT.)                       | 1.6                        |
| TEMPERATURE RANGE                        | 85°F to 220°F              |
| POWER                                    | 500W                       |
| MOIST / CRISP SELECTOR                   | No                         |
| APPROVED FOR OUTDOOR USAGE               | No                         |
| Weights & Dimensions                     |                            |
| NET WEIGHT (LBS.)                        | 73.2                       |
| SHIPPING WEIGHT (LBS.)                   | 79.6                       |
| PRODUCT DIMENSIONS (W X H X D IN INCHES) | 28 3⁄8 x 9 1⁄16 x 23 13⁄16 |
| CUTOUT REQUIRED (W X H X D IN INCHES)    | 28 1⁄2 x 9 1⁄8 x 24        |
| Technical Details                        |                            |
| ELECTRICAL REQUIREMENTS                  | 120V, 60 Hz, 15A           |
| Warranty                                 |                            |
| FULL COVERAGE                            | 2 Years                    |

30-Inch Warming Drawer

dacor

| Appliance Dimensions                 |                       |
|--------------------------------------|-----------------------|
| A - MOUNTING BRACKET WIDTH (IN/CM)   | 28 3⁄8" / 71.9        |
| B - CHASSIS WIDTH (IN/CM)            | 27 3⁄8" / 70.1        |
| C - CHASSIS FACE WIDTH (IN/CM)       | 28 3⁄8" / 72.1        |
| D - MOUNTING BRACKET HEIGHT (IN/CM)) | 8 15⁄16" / 22.7       |
| E - CHASSIS DEPTH (IN/CM)            | 23 1⁄2" / 59.6        |
| F - DRAWER DEPTH (IN/CM)             | 22 3⁄8" / 57.4        |
| G - CHASSIS HEIGHT (IN/CM)           | 9 3⁄8" / 23           |
| H* - DRAWER FRONT WIDTH (IN/CM)      | 29 3⁄4" / 75.6        |
| I* - DRAWER FRONT HEIGHT (IN/CM)     | 9 3⁄8" / 23.9         |
| J* - DRAWER FRONT DEPTH (IN/CM)      | May Vary. See Manual. |

Recommended custom panel dimension based on DWR30U900WS/DA and DWR30U900WM/DA steel door front dimensions. Depth of Custom Panels may vary.

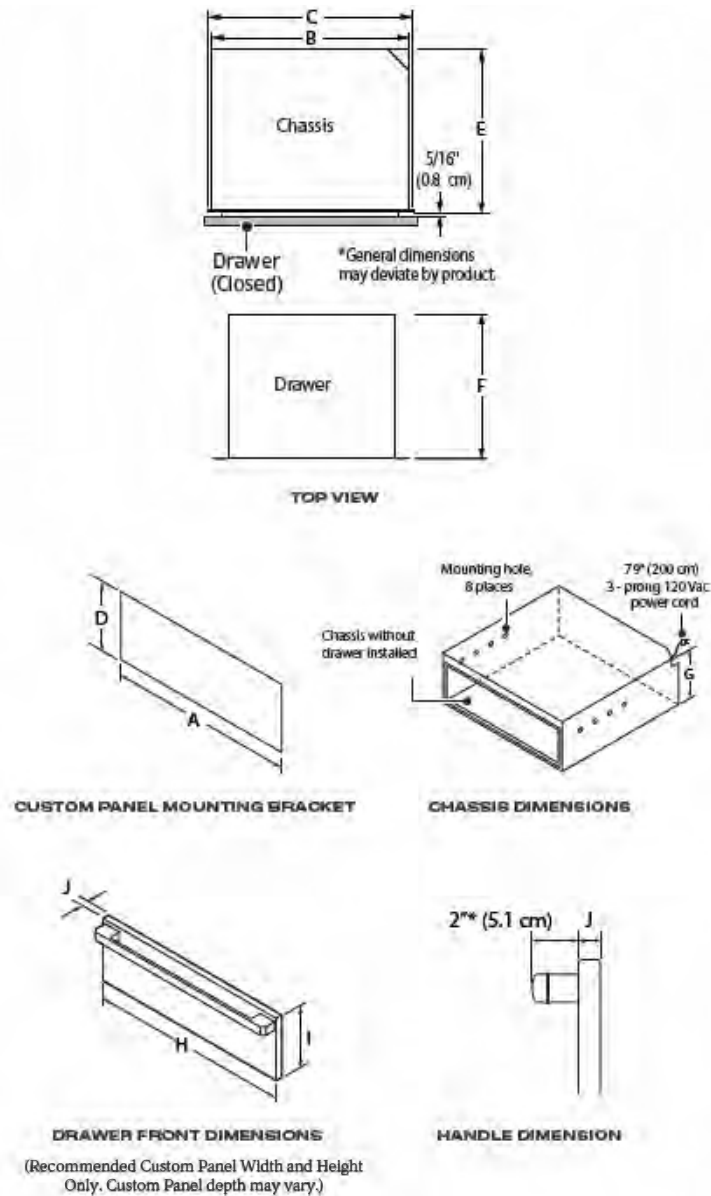

| Installation Specifications                          |                |
|------------------------------------------------------|----------------|
| A - CUTOUT WIDTH (IN/CM)                             | 28 1⁄2" / 72.4 |
| B* - MINIMUM WIDTH TO ADJACENT DOORS/DRAWERS (IN/CM) | 30 3⁄4" / 76.8 |
| C - CUTOUT HEIGHT (IN/CM)                            | 9 3⁄8" / 23.2  |
| D - MINIMUM VERTICAL GAP BETWEEN CUTOUTS (IN/CM)     | 1 1⁄4" / 3.2   |
| MINIMUM CUTOUT DEPTH (IN/CM))                        | 24" / 61.0     |

\*Bare minimum spacing for ventilation and to avoid scraping on DWR30U900WS, DWR30U900WM models

\*\* DWR30U900WP: Chassis and drawer face are smaller than cutout; custom front panel mounts to drawer face; height and width of custom front panel must exceed cutout dimensions (A, C above) to cover hole; allow 1/4" minimum added space on top, bottom and sides from the custom front panel edge to prevent scraping against adjacent doors, drawers, and countertop;

