36-Inch Counter Depth Refrigerator with Reveal™ Door



\$3,499 - \$3,699



DRF36C500SR/DA - Silver Stainless
DRF36C500MT/DA - Graphite Stainless

Features & Benefits

- Reveal[™] doo:
- Dual icemaker with IceBites $^{\scriptscriptstyle{TM}}$ and cubed ice
- · Beverage Center with interior water pitcher and water dispenser
- Metal Cooling $^{\scriptscriptstyle{\text{TM}}}$ stainless steel back interior
- Digital display control panel with SmartThings Wi-Fi control
- Dedicated egg basket
- · 15-year warranty on digital inverter compressor
- · LED lighting
- · R600a refrigerant

Controls	
CONTROL TYPE	Digital Interior
WI-FI + SMARTTHINGS	Yes
SABBATH MODE	Yes


Features			
TOTAL CAPACITY (CU. FT.)	22.8		
PUSH-TO-OPEN™	No		
WATER DISPENSER	Interior Left Door B	everage Center	
ICEMAKER	Cubed Ice and	IceBites™	
IQ REMOTEVIEW™ CAMERA	No		
LED LIGHTING	Yes		
INTERIOR MATERIAL	Metal Coc (Stainless Steel		
DIGITAL INVERTER COMPRESSOR	Yes		
REFRIGERANT	R600	a	
CRISPER DRAWERS	2		
FREEZER DRAWERS	2		
DOOR BINS	6 (Refrigerator),	, 6 (Freezer)	
SHELVES	4 (Refrigerator),	, 4 (Freezer)	
DOOR ALARM	Yes		
Refrigerator			
REFRIGERATOR CAPACITY (CU. FT.)	13.7		
REFRIGERATOR TEMPERATURE	34°F to	14°F	
POWER COOL	Yes		
Freezer			
FREEZER CAPACITY (CU. FT.)	9.1		
FREEZER TEMPERATURE	-8°F to 5°F		
POWER FREEZE	Yes		
Weights & Dimensions			
NET WEIGHT (LBS.)	295		
SHIPPING WEIGHT (LBS.)	315		
PRODUCT DIMENSIONS (W X H X D IN INCHES)	35 % x 70 x 28 ½		
Technical Details			
ELECTRICAL REQUIREMENT	115 - 120V, 60 Hz, 10A		
Warranty			
FULL COVERAGE	2 Years		
SEALED SYSTEM, PARTS AND LABOR	6 Years		
SEALED SYSTEM, PARTS ONLY	12 Years		
COMPRESSOR, PARTS ONLY	15 Years		
Accessories (Optional)			
RACOOWFAAAA/DA Water Filter fo	DOWFAAAA/DA Water Filter for Refrigeration \$99		

36-Inch Counter Depth Refrigerator with Reveal™ Door



\$3,499 - \$3,699

Product Dimensions		
A - DEPTH (IN/MM)	28 ½ (723 MM)	
B - WIDTH (IN/MM)	35 % (912 MM)	
C - HEIGHT (IN/MM)	68 % (1748 MM)	
D - OVERALL HEIGHT (IN/MM)	70 (1779 MM)	

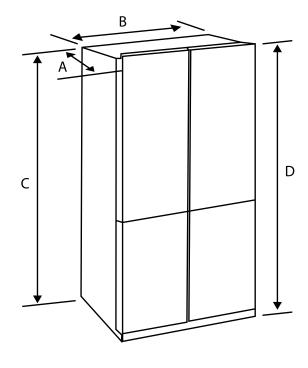

Installation Cutout Dimensions		
O1 - (IN/MM)	More than 2 (50 MM) recommended	
02	125°	
O3 - (IN/MM)	58 (1472 MM)	
04 - (IN/MM)	11 1/8 (282 MM)	
05 - (IN/MM)	24 (610 MM)	
06 - (IN/MM)	1 % (47 MM)	
07 - (IN/MM)	43 (1093 MM)	

