

48-INCH GAS RANGETOP

DTT48M876 | MODERNIST COLLECTION



AVAILABLE MODELS

48" Rangetop, Stainless Steel, Natural Gas DTT48M876LS DTT48M876PS 48" Rangetop, Stainless Steel, Liquid Propane DTT48M876HS 48" Rangetop, Stainless Steel, Natural Gas/High Altitude DTT48M876AS 48" Rangetop, Stainless Steel, Liquid Propane/ High Altitude DTT48M876LM 48" Rangetop, Graphite Stainless Steel, Natural Gas DTT48M876PM 48" Rangetop, Graphite Stainless Steel, Liquid Propane DTT48M876HM 48" Rangetop, Graphite Stainless Steel, Natural Gas/High Altitude 48" Rangetop, Graphite Stainless Steel, DTT48M876AM Liquid Propane/High Altitude

FEATURES & BENEFITS

- → 6 Sealed Brass Burners.
- → Powerful 22K BTU and true simmer burners.
- Continuous grates.
- → Illumina™ Knobs and Ambient Light.
- Includes brass and black burner caps.
- Available in graphite stainless steel and silver stainless steel finish.

ACCESSORIES (INCLUDED)


WOK RING


BRASS BURNER CAPS


BLACK BURNER CAPS

BURNER PERFORMANCE		
TOTAL NUMBER OF COOKTOP BURNERS	6 (BRASS)	
LEFT FRONT (BTU)	18,000 DUAL (SIMMER)	
LEFT REAR (BTU)	16,000 STACK DUAL (SIMMER)	
CENTER FRONT (BTU)	16,000 STACK DUAL (SIMMER)	
CENTER REAR (BTU)	16,000 STACK DUAL (SIMMER)	
RIGHT FRONT (BTU)	22,000 DUAL (SIMMER)	
RIGHT REAR (BTU)	9,000 STACK DUAL (SIMMER)	
SEALED BURNERS	YES	
CONTROL FEATURES		
LED KNOB BACKLIGHTING	YES	
LED AMBIENT LIGHTING	YES	
LED CONTROL BUTTON	YES	
WI FI CONNECT LED	YES	
WI FI CONNECT BUTTON	YES	
BLUETOOTH CONNECT LED	YES	
BLUETOOTH CONNECT BUTTON	YES	
ADDITIONAL FEATURES		
RE-IGNITION	YES	
OIL PAN	YES	
INSTALLATION		
GAS TYPE	NATURAL GAS/ LIQUID PROPANE	
HIGH ALTITUDE AVAILABLE	YES	
POWER CORD	YES	
TECHNICAL DETAILS		
CIRCUIT BREAKER (A)	15	
VOLTS (V)	120	
FREQUENCY (HZ)	60	
ENERGY SOURCE	GAS	
DIMENSIONS & WEIGHT		
APPLIANCE DIMENSIONS (H X W X D) (IN.)	8" X 48" X 24"	
REQUIRED CUTOUT SIZE (W X H) (IN.)	7 3/4" X 48" X 24"	
WARRANTY		

APPLIANCE DIMENSIONS




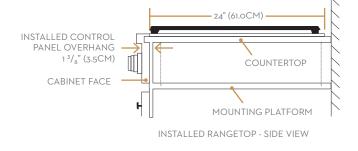



CABINET/COUNTERTOP DIMENSIONS

10" (25.4CM) TO COMBUSTIBLE SIDE WALL MIN. BOTH SIDES





CABINET / COUNTERTOP DIMENSIONS - FRONT VIEW

*NOTE: PRODUCT TOLERANCE +/- 1/16" (+/- 1.6MM)-o UNLESS OTHERWISE NOTED

	/8" (1.0 cm) min. Non combustible rear wall recommended Open to below to allow for raised vent, gas and electrical connections	10" (2.5 cm) min. to combustible wall above countertop, both sides
26 5/8" (67.6 cm) 1/2" (1.3 cm) countertop overhang overhang (38.1 cm) 10 11/16" (27.2 cm) Cabinet face below countertop verhang	1" (2.5 cm) thick mounting platform min. — Hole 1/2" dia. (1.3 cm), 2 places, through platform for hold down bolts B Q A	overhang 1/2" (1.3 cm) countertop overhang 1 7/8" (4.8 cm) counterop overhang 1" (2.5 cm) typical 1 3/8" (3.5 cm) max.

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH DOWNDRAFT VENT - TOP VIEW.

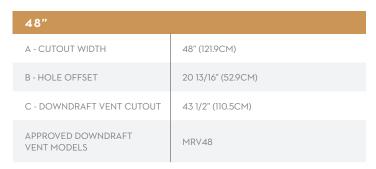





CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH DOWNDRAFT VENT - SIDE VIEW

NOTE: Gas and electrical connections may only be routed through the bottom of the rangetop when installed with a downdraft vent.




CABINET/COUNTERTOP CUTOUT DIMENSIONS



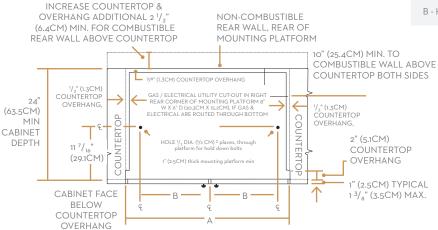

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITHOUT DOWNDRAFT VENT - TOP VIEW

CLEARANCE DIMENSIONS

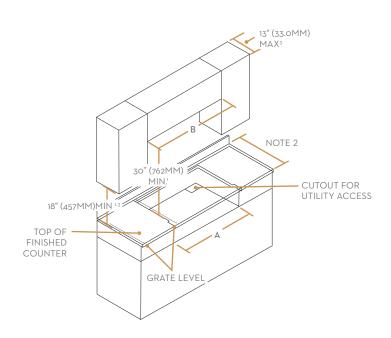

48"	
A - CUTOUT WIDTH	48" (121.9CM)
В	48" (121.9CM)* MINIMUM 54" (137.2CM)** RECOMMENDED

NOTE: All vertical clearances must be maintained for a minimum of 18" (457mm) above the cooking surface.