



30" WALL CHIMNEY HOOD

DHW301



GENERAL PROPERTIES

FINISH	STAINLESS STEEL
--------	-----------------

OPTIONAL ACCESSORIES

RECIRCULATION KIT FOR DHW301	AVDH1
------------------------------	-------

NUMBER OF MOTORS

(1) SINGLE BLOWER	600 CFM
-------------------	---------

TECHNICAL INFORMATION

CIRCUIT REQUIREMENTS	120VAC, 15AMP, GROUNDED DEDICATED, 3-WIRE CIRCUIT
TOTAL CONNECTED LOAD	120VAC/60HZ
MAX CURRENT DRAW	3.4 AMPS
SHIPPING WEIGHT	61LBS

PRODUCT DIMENSIONS


WALL DIMENSIONS (H X W X D) (IN.)	30 1/4"-42" X 30" X 24"
-----------------------------------	-------------------------

DHW MODEL

Tolerances: $\pm 1/16"$ (± 1.6 mm), -0 unless otherwise stated

FEATURES & BENEFITS

- 8" diameter exhaust. Can accommodate up to a 10" duct.
- Squirrel cage style blower. 4 blower speeds.
- Auto off setting after 4 hours.
- Blue illuminated electronic control panel.
- 10 minute Timer (motor runs for 10 minutes and then automatically shuts off).
- 20 watt halogen lights (can be used w/ 10, 20, or 30w bulbs)
- Easy-to-clean Baffle Filter System, dishwasher safe.
- Hood can be installed to exhaust through the ceiling or rear wall

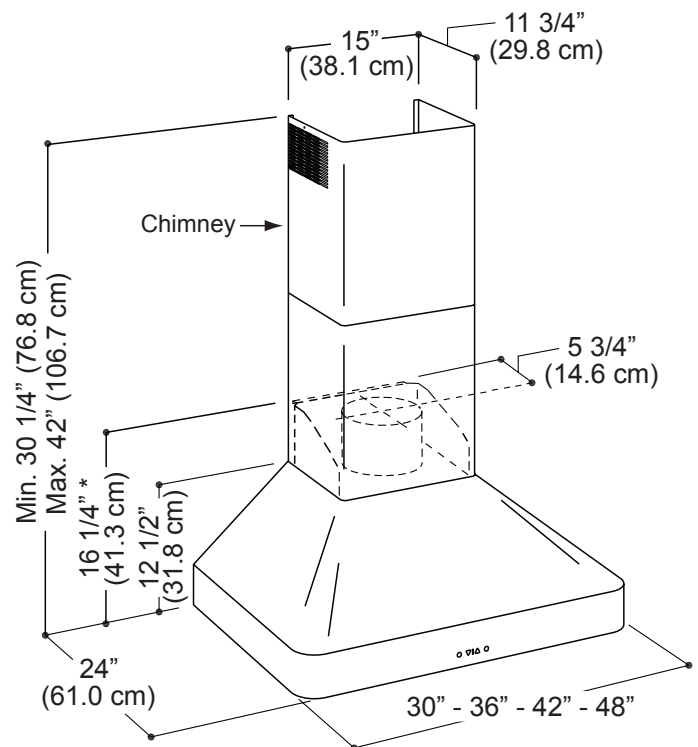

**Warranty: Limited, parts and labor for one year