

FRONT LOAD WASHER

With IQ-Touch™ Electronic Controls Featuring Perfect Steam™





Pedestals Shown in





SIGNATURE FEATURES



PERFECT STEAM™ WASHER

Only steam washer available in compact laundry industry¹. Our Perfect Steam™ washer vents from the bottom so it uses the natural rise of steam to more effectively remove stains.



EXPERTCARE™ WASH SYSTEM

No other compact washer cleans better³. State-of-the-art wash technology includes varied wash motions and bottom-vent steam options to deliver the best front load cleaning performance.



INDUSTRY LEADING CAPACITY²

Wash the most in one compact load with our 2.8 cu.ft. capacity washer.



14 SPECIALTY CYCLES

Including Fast Wash, Eco-Friendly, Delicate.

EIFLS20QSW

PRODUCT DIMENSIONS

 Height
 33-1/2"

 Width
 24"

 Depth
 25"

MORE EASY-TO-USE FEATURES

NSF® CERTIFIED

Our products undergo rigorous testing to ensure they meet the industry safety standards.

DEEP CLEAN SANITATION CYCLE

Removes 99% of bacteria and 95% of common household allergens⁴.

HIGHEST SPIN SPEED

1400 RPM spin speed removes more water and allows for more efficient drying. Highest spin speed available.

LUXURY-QUIET™

So quiet you can run it whenever you want.

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labour⁵.

PERFECT BALANCE® SYSTEM/ SECOND FLOOR GUARANTEE

State-of-the-art technology keeps even oversized wash loads balanced for smooth, quiet operation. Perfect for installation upstairs — even near bedrooms.

IQ-TOUCH™ CONTROLS

Unique knobless controls and intuitive design offer clean, sleek style to fit any space and provide easy operation.

ENERGY STAR® QUALIFIED

Our products meet strict criteria to guarantee high-quality energy efficient performance.

ECO-FRIENDLY

Gentle on the environment and your clothes. Washers are 75% more energy efficient⁶ and use 56% less water.

DELAY START

Adjust washer start time to meet your lifestyle needs.

Available in:



White (SW)

¹Compact industry refers to washers/dryers 25" and below.

²Among like priced models. ³Compared to traditional compact washers.


Our products meet the NSF® testing standards.

Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labour for 1 year.

Energy efficiency based on current I.E.C. Federal minimum standard for washers based on MEF.



Capacity I.E.C.	2.8 Cu.Ft.
FEATURES	
Pull-to-Open Door	Yes
IQ-Touch™ Electronic Controls	Yes
Perfect Steam™ Wash System	Yes
Balance System	Perfect Balance®
Sound System	Luxury-Quiet™
Wash System	ExpertCare™
Integral Water Heater	Yes
Wash Drum	Stainless Steel
Automatic Temperature Control	Yes
Automatic Water Level Adjustment	Yes
Auto Prewash Detergent Dispenser (Liquid/Powder)	Yes
Auto Bleach Dispenser (Liquid Only)	Yes
Auto Detergent Dispenser (Liquid/Powder)	Yes
Auto Fabric Softener Dispenser (Liquid Only)	Yes
Spin Speed (RPM)	1,400
Adjustable Leveling Legs	Yes
ENERGY STAR®	Yes
NSF® Certified	Yes
CYCLES	
Normal, Deep Clean Sanitize, Heavy Duty, Delicates, Rinse & Spin, Casual;	6 Wash;
Steam Refresh, Normal with Steam, Casual with Steam; Fast Wash, Whites, Wool, Jeans, Clean Washer	3 Steam; 5 Specialty
OPTIONS	
Temperature Selections	5
Add Steam	Yes
Spin Speed Selections	5
Soil Level Selections	5
Delay Start (Hours)	Yes
End-of-Cycle Chime	Yes
INCTALL ATION OPTIONS	
INSTALLATION OPTIONS Freestanding, Under Counter, Stacked (Under Dryer), Pedantal Peaceand Means	Yes
Pedestal, Recessed Alcove	
ACCESSORIES Pedestal —	
White – PN# EPWD200QSW	Optional
Dryer Stacking Kit – PN # STACKIT24	Optional
SPECIFICATIONS	
Colour –	
White	SW
Power Supply Location	Top Right Rear
Water Inlet Location	Top Right Rear
Voltage Rating	120V/60 Hz
Connected Load (kW Rating) @ 120 Volts ¹	1.3 kW
Watts@120 Volts	1300 W
Amps@120 Volts	10A
Shipping Weight (Approx.)	180 Lbs.
An electrical supply with grounded three-prong receptacle is required. The power must be installed in accordance with national and local codes & ordinances.	r supply circuit

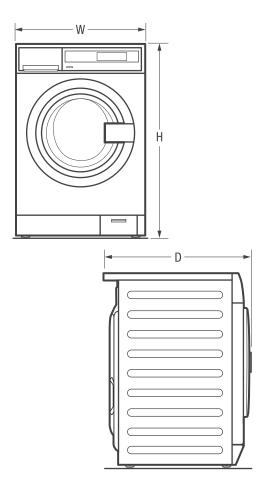

Height (without 12" Pedestal)	33-1/2"
(with 12" Pedestal)	46"
Width	24"
Depth	25"
(with Door 90° Open)	42"

