

Under-Counter Refrigerator Drawers

EI24RD65KS

Featuring IQ-Touch^{MC} Electronic Controls



Perfect Set[®] Temperature Control

Set a temperature anywhere between 34 and 45 degrees — the Refrigerator Drawers will hold it to within one degree of variance.



Luxury-Glide[®] System

Opening or closing a drawer is smooth and easy — all it takes is the touch of a finger.



Luxury-Design[®] Lighting

Our ramp-up designer LED lighting is as beautiful as it is functional.



Large Capacity

Even large enough for two-litre bottles and large serving trays.

24" FRESH FOOD REFRIGERATOR DRAWER

Sabbath Mode (Star-K [®] Certified)	Yes
Capacity	6.0 Cu. Ft.
Configuration	2 Drawers
Installation Type	Built In

Features

IQ-Touch [™] Electronic Controls	Yes
Fully Integrated Control Panel	Yes
Blue LED Display	Yes
Luxury-Glide [®] Full-Extension Self-Closing Drawers	Yes
Luxury-Design [®] Lighting	Yes
Perfect Set [®] Controls	Yes
PureAdvantage [®] Air Filtration	Yes
Electronic Control Lock	Yes
Display Temp Mode (°C or °F)	Yes
Door Ajar Acoustic Alarm	Yes
High-Temperature Acoustic Alarm	Yes
Power Failure Acoustic Alarm	Yes
Mute Sound Control	Yes
Power-On/Off Control	Yes
Vacation Mode	Yes
Sabbath Mode (Star-K [®] Certified)	Yes
Holds 12" Bottle (Upper and Lower Drawer)	Yes
Storage Shelf (Lower Drawer)	Yes
Frost-Free Performance	Yes
Dynamic Condenser	Yes

Additional Features

Signature Soft-Arc Drawer Front and Handle Design	Yes
Adjustable Leveling Legs	4

Accessories

Storage Pans	Optional
Adjustable Slide-and-Divide Divider (Upper Drawer)	Optional


Colour/UPC (0-12505-)

Stainless Steel (S)	67365-8
---------------------	---------

Specifications

Cavity Dimensions –	
Height (Upper Drawer)	12-3/64"
(Lower Drawer)	12-3/16"
Width	18-1/16"
Depth	18-9/32"
Product Dimensions –	
Height	34" – 35"
Width	23-13/16"
Depth (to Center of Arc)	24-1/4"
(Fully Extended Including Handle)	42-3/4"
Temperature Range	34° F - 45° F
Electrical Cable	Yes
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts †	0.16
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	150 Lbs.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxappliances.ca. Specifications subject to change.

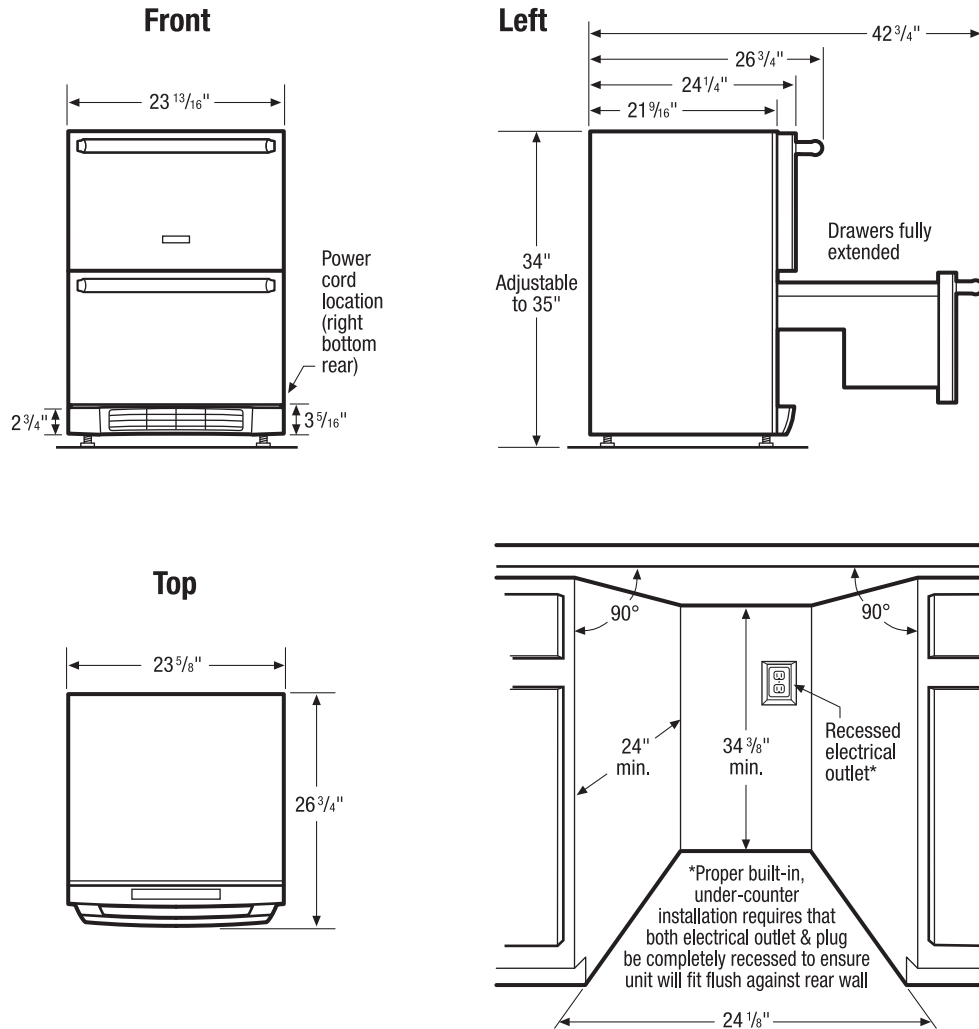

Refrigerator Drawer Specifications

- Product Weight – 128 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- Electrical cable supplied.
- Always consult local and/or national electric codes.
- Can be used freestanding, or built-in under counter.
- Does not require additional airspace for top, sides or rear when used in built-in application. Increase unit dimensions by at least 1/4" for recommended rough opening.
- Front grille MUST remain unobstructed for proper ventilation.
- Must be positioned on flat, level surface, capable of supporting entire weight when fully loaded.

- Leveling legs supplied to adjust height and level unit.
- Do not position unit near any heat source to ensure optimum performance.
- Allow 18" minimum for handle clearance with drawers fully extended.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca or supplied with product for detailed instructions.