

NOVA PRO WALL RANGE HOOD




PRO DEPTH TRADITIONAL CANOPY HOOD. The Nova Pro honors its European roots with beautifully wrapped polished stainless steel edges, clean vertical lines and a pro depth 21.5" canopy. The Nova Pro also features a ***first in Faber canopies***, top or direct rear venting capability inside the 10" tall canopy section!



AVAILABLE MODELS

Model #	Size / Color	Motor Class (CFM)	Sound Levels (sones)
NOPR30SS600	30 Stainless	600 CFM	2.8 - 7.5 sones
NOPR36SS600	36 Stainless	600 CFM	2.8 - 7.5 sones

KEY FEATURES



VariDuct System
Top and Rear Direct Venting
Easy kitchen integration with top and direct rear venting inside the canopy



Remote Control (optional)
Control all features of the hood from the convenience of a wireless remote control (sold separately).



Baffle Grease Filters
Dishwasher safe SS metal filters capture grease and allow for easy clean up in the dishwasher.



Adjustable Mounting Hardware
Wall brackets are adjustable once the hood is hung to insure a perfect level installation.



Pro Motor
The motor in this hood is surrounded in metal with all metal impellers for top performance.

NOVA PRO WALL RANGE HOOD



SPECIFICATIONS

min / max ceiling height	7' 5" - 8' 11 3/8"
convertible to ductless / recirculating	yes - kit sold separately
canopy depth / height	21 9/16" 10 3/8"
high ceiling kit	yes - up to 11' 8 7/8"
controls (underneath)	4 speed push button white LED
pro motor	yes - (metal impellers)
lighting	2 X 5 (W) LED
ducting top / rear (Vari-Duct)	6" round
grease filters	dishwasher safe stainless steel baffle
adjustable mounting hardware	yes
ADA compliant	yes - with remote control purchase
power cord	yes - wire box optional
AC input / AC Power	340 watts / 2.8 amps

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	350	450	560
Sones	2.8	4.3	6.0	7.5

MIN / MAX CEILING HEIGHTS

	DUCTED	RECIRC	HIGH CEILING
Min @ 24" OFF	7' 5"	7' 5"	9' 3/8"
Max @ 30" OFF	8' 11 3/8"	8' 11 3/8"	11' 8 7/8"

ACCESSORIES

CFMRED - CFM Reducer Kit *

For use in make up air areas where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300.

CFMRED2 - CFM Reducer Kit*

For use in make up air environments where an under 400 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm from 600 to under 400.

DUCT5 Ductless Conversion Kit

To convert the Novo Pro to ductless, this kit includes charcoal filters and a diverter to send the air thru the side grates on the upper chimney.

FILTER1 - Charcoal Filter Kit

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months.

FILTER1LL - Long Lasting Charcoal Filter Kit

New washable charcoal filter can be recharged and washed up to 8 times. For use when recirculating the air back into the kitchen. Filters out odor and can last up to 4 years.

HIGH3 - High Ceiling Chimney Kit

Extends the chimney for high ceilings to 11' 8 7/8".

MUDAMPER6 / MUDAMPER8 - Universal Make-Up Air Damper

Satisfies make-up air requirements, this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory.

REMCTRL - Remote Control


Control all features of the hood from the convenience of a wireless remote control.

WIREBOX - Fixed Wiring Box

Replace the power cord with a hard wired box to power the range hood.


DIMENSIONS

Ducted / Ductless

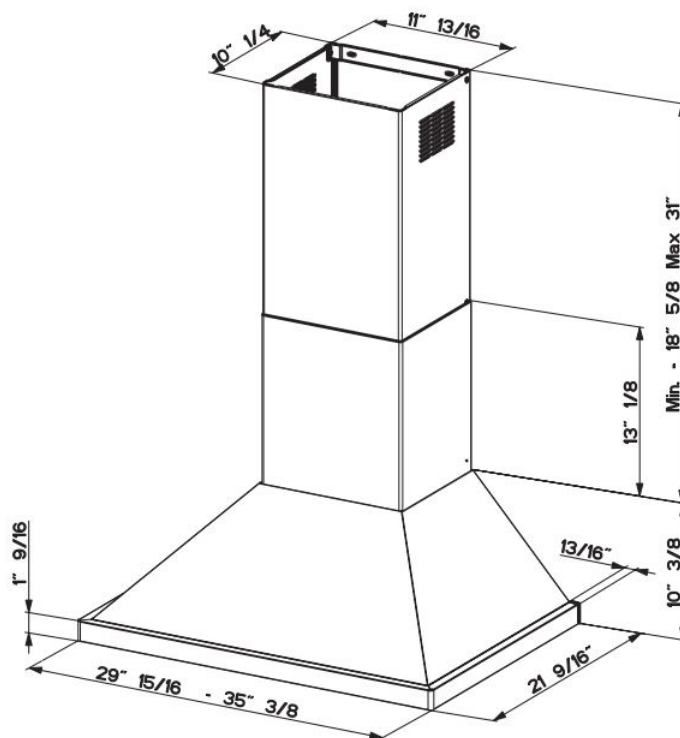

Rear Vent (Vari-Duct) Dimensions

(blower comes in top vented position)

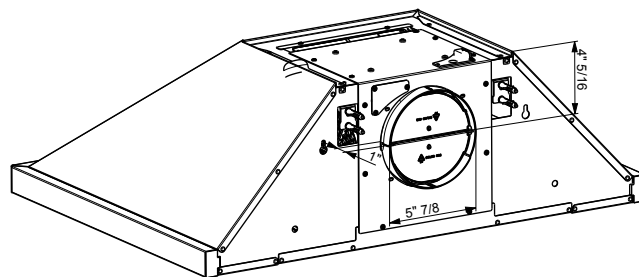

Rev: 4/18

2 Cabot Road Hudson, MA 01749 • TEL: (508) 358-5353 • E-Mail: info@faberonline.com www.faberonline.com

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for guidelines.



Imagined in Italy