

FLIPPER

Version

Wall 85 cm - Turquoise - 800 m³ /h

Collection

Design

EAN code

8034122350073



Photograph is for information purposes only
May not correspond to the selected version

FEATURES

- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Optional combined regenaleble Carbon.Zeo filter
- Charcoal filter included
- Possible to duct wall mounted from rear
- Optional Chimney
- Turquoise tempered glass with Steelcentral band

OPTIONAL ACCESSORIES

- KCQAN.00#I**
Chimney (Inox)
- KACL.798#41F**
Remote under-roof motor 950 m³/h
- KACL.770#41F**
Remote under-roof 1100 m³/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m³/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m³/h
- KACL.797#4AF**
Remote under-roof motor 1300 m³/h

TECHNICALFEATURES

- Installation type
Wall
- Dimensions
85 cm
- Finish
Turquoise tempered glass with Fasteel central band
- Motor
800 m³/h
- Type of control
Electronic control
- Speed settings
4
- Lighting
Led 2x1,2 W - 3200 K
- Filter
Metallic filter "Base" - 284x234 mm - 2 pz
- Charcoal filter
Round charcoal filter Ø 6" - Type 6 - included
- Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight
30 kg
- Net weight
25 kg
- Volume
0,27 m³
- Packaging size
Length
950 mm
Height
655 mm
Depth
440 mm

MOTOR TECHNICAL SHEET

- Maximum capacity
750 m³/h
I.E.C. 61591
- Maximum noise
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
510 Pa
- Maximum power motor
224 W
- ENERGY CLASS
A

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Current
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

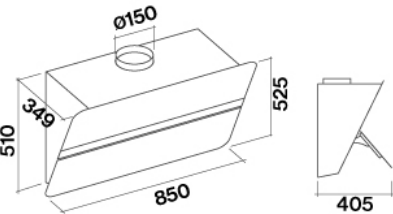

FLIPPER

Version
Wall 85 cm - Turquoise - 800 m³ /h


Collection
Design

EAN code
8034122350073

MOTOR TECHNICAL SHEET

Motor Speed	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power motor (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

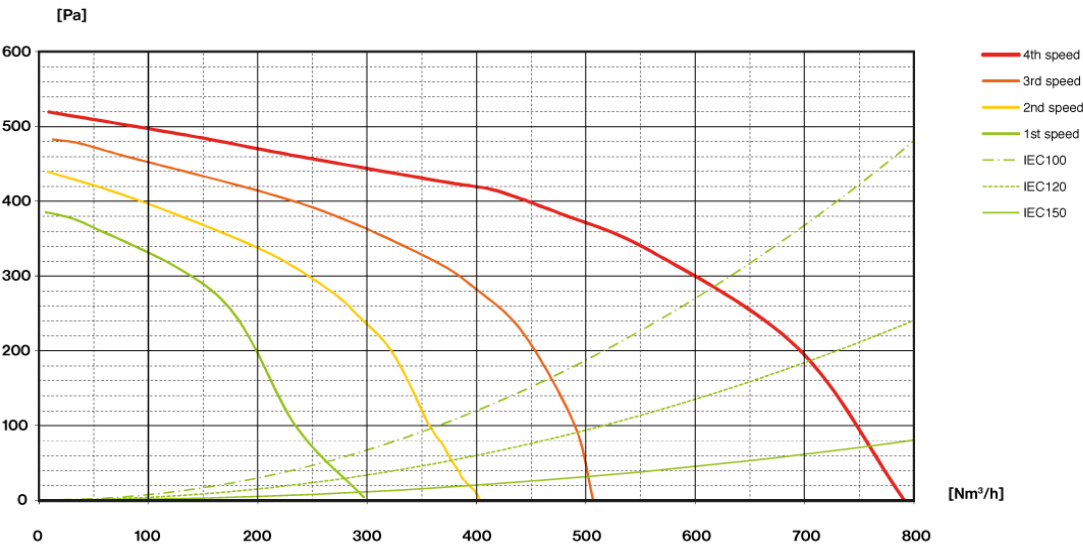

FLIPPER

Version

Wall 85 cm - Turquoise - 800 m³ /h


Collection

Design

EAN code

8034122350073

ENERGY LABEL

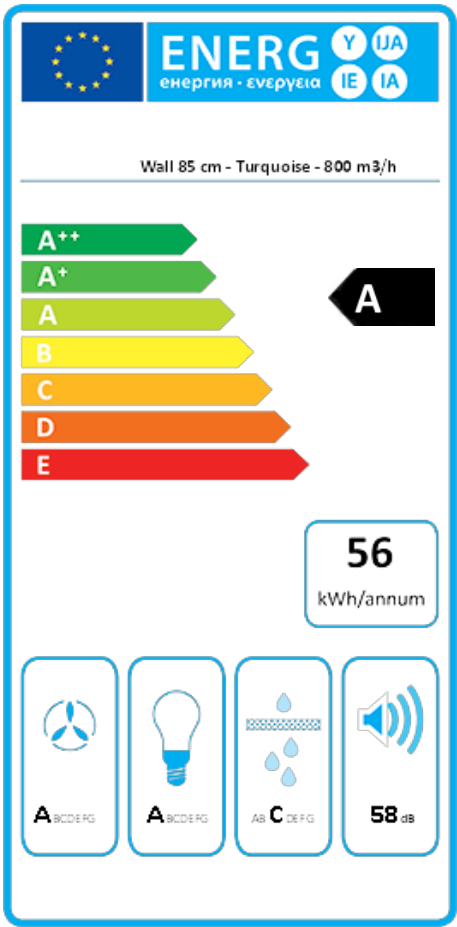

PF		
S	Falmec Spa	
M	Wall 85 cm - Turquoise - 800 m ³ /h	
AEC	55,9	kWh/a
ECC	A	
FDE	29,4	
FDEC	A	
LE	30,0	
LEC	A	
GFE	82,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEI	52,2	
Qbep	430,0	m ³ /h
Pbep	404	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	2,80	W
Emiddle	85	lex
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.