FRIGIDAIRE

affinity.



Dryer CARE1011MW



7.0 Cu. Ft. I.E.C. Electric

Product Dimensions

8 Dry Cycles

Height	43
Width	27′
Depth	29'

More Easy To Use Features

8 Dry Cycle Selections

No Heat Air Fluff

Chime On/Off Alert

4 Temperature Selections

Available in:



Signature Features




Fits-More™ Dryer Dry more in one load with our large, 7.0 cu.ft. interior.



TimeWise® Technology
TimeWise® Technology ensures wash
time equals dry time — so you don't
wait for clothes to dry.



One-Touch™ Wrinkle Release
This option features Wrinkle Release
Technology that finishes by tumbling
without heat, preventing wrinkles, so
your clothes look great every time.




Express-Select® ControlsEasily select options with the touch of a button.

affinity.

Features	
Total Capacity I.E.C. (Cu.Ft.)	7.0
Controls	Express-Select*
Dryer Drum Interior	Painted Steel
Interior Light	
Framed Glass Window Door	
DrySense™ Technology	
Wrinkle Release Technology	Yes
TimeWise* Technology	Yes
Moisture Sensor	
Estimated Time Remaining	
Cycle Status Lights	Yes
Cycle Signal	Chime
Cycle Signal "On/Off"	Yes
Control Lock	
Start/Pause/Cancel Knobs	Yes
Delay Start	
Tumble Speed (RPM)	50
Reversible Door	Yes
Lint Screen	Yes
Sound Package	
Adjustable Leveling Legs	4
Cycles	
Dry Cycles	8
Specialty Cycles	0
Options	
Temperature Selections	4
Dryness Level Selections	0
Timed Dry	15, 30, 60, 90
Energy Saver Option	
Energy Saver Option Optional Accessories	
	PN# 137067200
Optional Accessories	PN# 137067200 PN# 137067300
Optional Accessories Mobile Home Installation Kit	
Optional Accessories Mobile Home Installation Kit Drying Rack	
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications	
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications	PN# 137067300
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.)	PN#137067300
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location	PN# 137067300 64 Rear
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	PN# 137067300 64 Rear 240V/60Hz/30A
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Connected Load (kW Rating) @ 240 Volts	PN# 137067300 64 Rear 240V/60Hz/30A 5.4
Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	PN# 137067300 64 Rear 240V/60Hz/30A

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

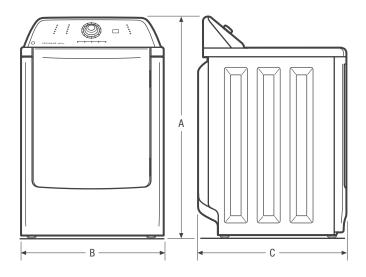

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions	
A-Height	43"
B-Width	27"
C-Depth	29"
Depth with Door Open 90°	50"

Accessories information available on the web at frigidaire.ca