

FRIGIDAIRE

affinity.



Dryer

FARG1011MW

8 Dry Cycles
7.0 Cu.Ft. I.E.C. Gas



Product Dimensions

Height	43"
Width	27"
Depth	29"

More Easy To Use Features

8 Dry Cycle Selections

No Heat Air Fluff

Chime On/Off Alert

4 Temperature Selections

Available in:



Classic
White
(W)

Signature Features



Fits-More™ Dryer

Dry more in one load with our large, 7.0 cu.ft. interior.




One-Touch™ Wrinkle Release

This option features Wrinkle Release Technology that finishes by tumbling without heat, preventing wrinkles, so your clothes look great every time.



TimeWise® Technology


TimeWise® Technology ensures wash time equals dry time — so you don't wait for clothes to dry.

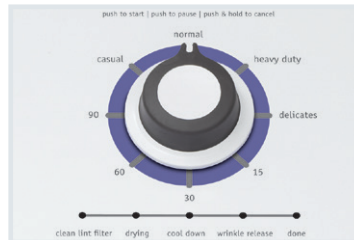

Express-Select® Controls

Easily select options with the touch of a button.

Features	
Total Capacity I.E.C. (Cu.Ft.)	7.0
Controls	Express-Select®
Dryer Drum Interior	Painted Steel
Interior Light	
Framed Glass Window Door	
DrySense™ Technology	
Wrinkle Release Technology	Yes
TimeWise® Technology	Yes
Moisture Sensor	
Estimated Time Remaining	
Cycle Status Lights	Yes
Cycle Signal	Chime
Cycle Signal "On/Off"	Yes
Control Lock	
Start / Pause / Cancel Knobs	Yes
Delay Start	
Tumble Speed (RPM)	50
Reversible Door	Yes
Lint Screen	Yes
Sound Package	
Adjustable Leveling Legs	4
Cycles	
Dry Cycles	8
Specialty Cycles	0
Options	
Temperature Selections	4
Dryness Level Selections	0
Timed Dry	15, 30, 60, 90
Energy Saver Option	
Optional Accessories	
Mobile Home Installation Kit	PN# 137067200
LP Gas Conversion Kit	PN# PCK4200
Drying Rack	PN# 137067300
Certifications	
NSF® Certified	
Specifications	
Maximum Exhaust Duct Length ¹ (Ft.)	64
Gas Connection	Rear
Power Cord Location	Rear
Voltage Rating	120V / 60Hz / 15A
Connected Load (kW Rating) @ 120 Volts ²	1.0
Amps @ 120 Volts	9.0
Heating Element (BTU / HR)	20,000
Shipping Weight (Approx.)	143 Lbs.

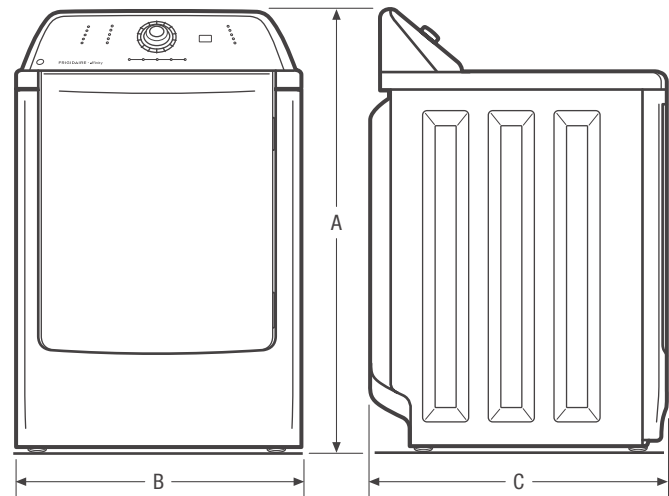

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions	
A - Height	43"
B - Width	27"
C - Depth	29"
Depth with Door Open 90°	50"

Accessories information available on the web at frigidaire.ca