FRIGIDAIRE

GALLERY_®

Built-In Cooktops

FGGC3045K S/W/B



Signature Features



Quick Boil
Boils water faster.



Continuous Grates
Continuous grates make it easy to
move heavy pots and pans between
burners without lifting.



Express-Select® Controls
Easily go from warm to boil.



Approved Over Frigidaire®
Electric Wall Ovens
Cooktops are approved for installation above any of our Single Electric Wall Ovens.

30" Gas

Product Dimensions

Width	30"
Depth	21-3/4"
Height	5"

More Easy-To-Use Features

Stainless Steel Recessed Cooktop¹ Electronic Pilotless Ignition LP Gas Conversion Option

Available in:

Stainless	White	Black
(S)	(W)	(B)

Burners	вти
Right Front	17,000
Right Rear	5,000
Left Front	12,000
Left Rear	9,500

¹Select models only.




FRIGIDAIRE

GALLERY

urface Type Stainl (S), C Reces ealed Gas Burners Yes rates Contin W/Bla ight Front Burner (BTU) ight Rear Burner (BTU) eft Front Burner (BTU) eft Front Burner (BTU) 9,500 eft Rear Burner (BTU) 9,500 ontrol Location Right nob Colour Stainl Colou nob Type pecifications ower Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Include	
urface Type Stainl (S), C Reces ealed Gas Burners Yes rates Continum/Bla ight Front Burner (BTU) ight Rear Burner (BTU) 5,000 eft Front Burner (BTU) 9,500 ontrol Location Right nob Colour Stainl Colou nob Type pecifications ower Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Include	ess Steel Recessed olour-Coordinated sed (W/B) nuous Cast Iron ck Matte Finish
(S), C Reces ealed Gas Burners rates Contin w/Bla ight Front Burner (BTU) ight Rear Burner (BTU) eft Front Burner (BTU) ontrol Location nob Colour nob Type pecifications ower Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Yes (S), C Reces Reces Reces (S), C Reces Reces (S), C Reces Reces (S), C Reces Ry, C Reces RyBla 17,000	olour-Coordinated sed (W/B) nuous Cast Iron ck Matte Finish
rates Continu/Blate Continu	ck Matte Finish
w/Bla ight Front Burner (BTU) 17,000 ight Rear Burner (BTU) 5,000 eft Front Burner (BTU) 12,000 eft Rear Burner (BTU) 9,500 ontrol Location Right nob Colour Stainl Colou nob Type Plastic pecifications ower Supply Connection Location Right as Supply Connection Location Right P Gas Conversion Kit Include	ck Matte Finish
ight Rear Burner (BTU) 5,000 eft Front Burner (BTU) 12,000 eft Rear Burner (BTU) 9,500 ontrol Location Right nob Colour StainI nob Type Plastic pecifications Power Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Include	
eft Front Burner (BTU) 12,000 eft Rear Burner (BTU) 9,500 ontrol Location Right nob Colour StainI nob Type Plastic pecifications Power Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Include	
eft Rear Burner (BTU) 9,500 ontrol Location Right nob Colour Stainl Colou nob Type Plastic pecifications ower Supply Connection Location as Supply Connection Location Right P Gas Conversion Kit Include	
ontrol Location Right nob Colour Stainl Colou nob Type Plastic pecifications ower Supply Connection Location Right as Supply Connection Location Right P Gas Conversion Kit Include)
nob Colour Staint Colou Staint Colou Plastic Staint Colou Staint Colou Staint Colou Staint Colour Staint S	
Colou nob Type Plastic pecifications ower Supply Connection Location Right as Supply Connection Location Right P Gas Conversion Kit Include	Side
pecifications ower Supply Connection Location Right as Supply Connection Location Right P Gas Conversion Kit Include	ess (S) r-Coordinated (W/B)
ower Supply Connection Location Right as Supply Connection Location Right P Gas Conversion Kit Include	:
as Supply Connection Location Right P Gas Conversion Kit Includ	
P Gas Conversion Kit Includ	Rear
110100	Rear
oltage Rating 120V	ed
	0011 /154
mps @ 120 Volts ¹ 1.0	60 Hz / 15A
inimum Circuit Required (Amps) 15	60HZ/I5A
pproved for Electric Single /all Oven Combination Installation ²	6UHZ/15A
hipping Weight (Approx.) 55 Lb	6UHZ/I5A

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation. ²Cooktops are approved for installation above any of our Electric Single Wall Ovens.

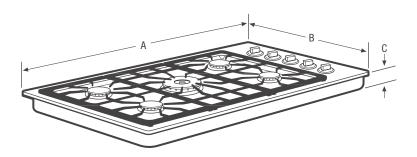

NOTE: For planning purposes only, Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.





Product Dimensions		Cu
A - Width	30"	Wic
B-Depth	21-3/4"	Dep
C-Height	5"	Hei

Cutout Dimensions	
Width (Min.)/(Max.)	27-1/4"/28-1/2"
Depth (Min.)/(Max.)	19-1/8"/19-3/4"
Height	8"

Granite Countertop Installation Kit available.

Accessories information available on the web at **frigidaire.ca**