lb/

inch

322 lb

33"

45"3/4

32"1/4

lb/

inch

377 lb

39"

45"3/4

32"1/4

W

D

Н

W

D

Н

Kg/

mm

146 Kg

840

1162

820

Kg/

mm

171 Kg


990

1162

820



30"-36" Full Gas Ranges 600 SERIES

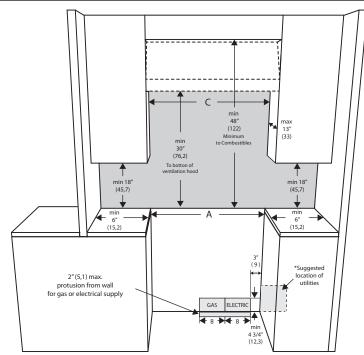

			CI
OPENING WIDTH	A & C	В	Th
Range 30"	30" (76,2)	6" (15,2)	
Range 36"	36" (91.4)	7" (17.8)	m

SHADED AREA:

The surface of the entire back wall above the range and below the hood must be covered with a noncombustible material.

*Consult local code for exact location requirements.

Note: Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and not certified. Clearances to non-combustible materials must conform with local codes or, in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.1/NFPA 54.

Minimum clearances:

Above cooking surface (above 36" [91.4 cm])


- Sides 6" (15.2 cm)
- Within 6" (15.2 cm) side clearance, wall cabinets no deeper than 13" (33.0 cm) must be minimum
- 18" (45.7 cm) above cooking surface
- Wall cabinets directly above product must be a minimum of 48" (122 cm) above cooking surface.
- Rear 0" with 9 " backguard; 0" with non-combustible rear wall.


Below cooking surface (36" [91.4 cm] and below)

• Install with zero clearance between adjacent combustible construction below the cooking surface and the back and sides of the appliance

ADDITIONAL CLEARANCES:

For island installation, maintain 2-½ in. minimum from cutout to back edge of countertop and 3 in. minimum from cutout to side edges of countertop (see top view). For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop. The island installation is not part of the ANSI Z21.1 scope and not certified.



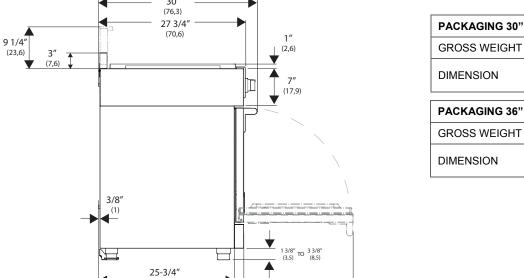

(65.4)

27-1/2" (69,8)

29-3/4"/

Max 38-1/2"

Min 36-3/8' (92,5)

27-1/2"

Max 37-1/4"

Min 35-3/8"

48 1/8"

(122,2)

or 9 1/4"

(23,6) [OPTIONAL]

Max 37-1/4"

Min 35-3/8"

27-1/2"

