

SINCE PASSIONE I ITALIANA

1040



#### PROFESSIONAL

PROFESSIONAL	pag	12
COOKING	pag	24
HOODS	pag	54
FRIDGE	pag	64
CLEAN	pag	72
ACCESSORIES	pag	74

#### DISTINTO

DISTINTO	pag	88
COOKING	pag	92
HOODS	pag	142
FRIDGE	pag	150
CLEAN	pag	156
ACCESSORIES	pag	162


#### TECHNICAL

DWG	pag	168
DATA	pag	187



# DESIGN

#### OF MILANO

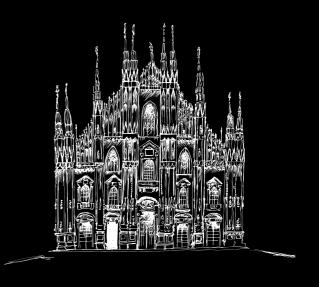

Milano is renowned the world over as the center of style and design. At Fulgor Milano we are inspired by this great city and its rich history of combining form and function with architecture. It is from this city which Sofia is born.

Sofia embodies a styling that is all her own, with an attention to detail and design that is unsurpassed in the industry. As it is with the Cathedral of Milano, our Sofia range stands out in a crowd. Drawing inspiration from the modern

cosmopolitan city of today, Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable.



# POWER

### OF ROMA




Not unlike the incredible eternal city of Roma, our Sofia products are designed to stand the test of time. A product that embodies endurance and is built on a tradition of beauty, durability, and functionality.

Roma has survived over two Millennia through evolution of design and innovation.

Fulgor Milano's passion for innovation has resulted in premium products born from a culinary culture dating back to ancient Roma but in synergy with today's lifestyle. Every one of our Sofia products has been developed to offer a lifetime of performance in an ergonomic and comfortable design that is both elegant and simple to use.




# GTSTO OF FIRENZE

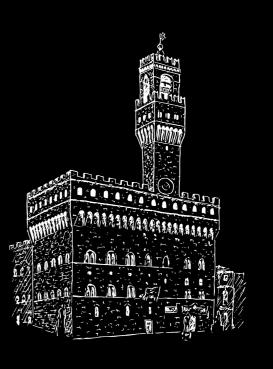

As the kitchen has once again become the center of the home over the past decade, Fulgor Milano understands our desire to incorporate appliances that meet the needs of both form and function. There are few places in the world that can boast a rich history of form, function, art and

design. Florence was the birth place of the renaissance, where Michelangelo and Leonard da Vinci sculpted and painted forms in perfect balance. It was during this renaissance that the art of cooking was born. Florance would become the birth place of gastronomy and was

the culinary center of the modern world at that time. Fulgor Milano has endeavored to incorporate all of these aspects into their cooking products. Drawing further inspiration from this great city and blending a perfect balance of quality, design and performance into every product.

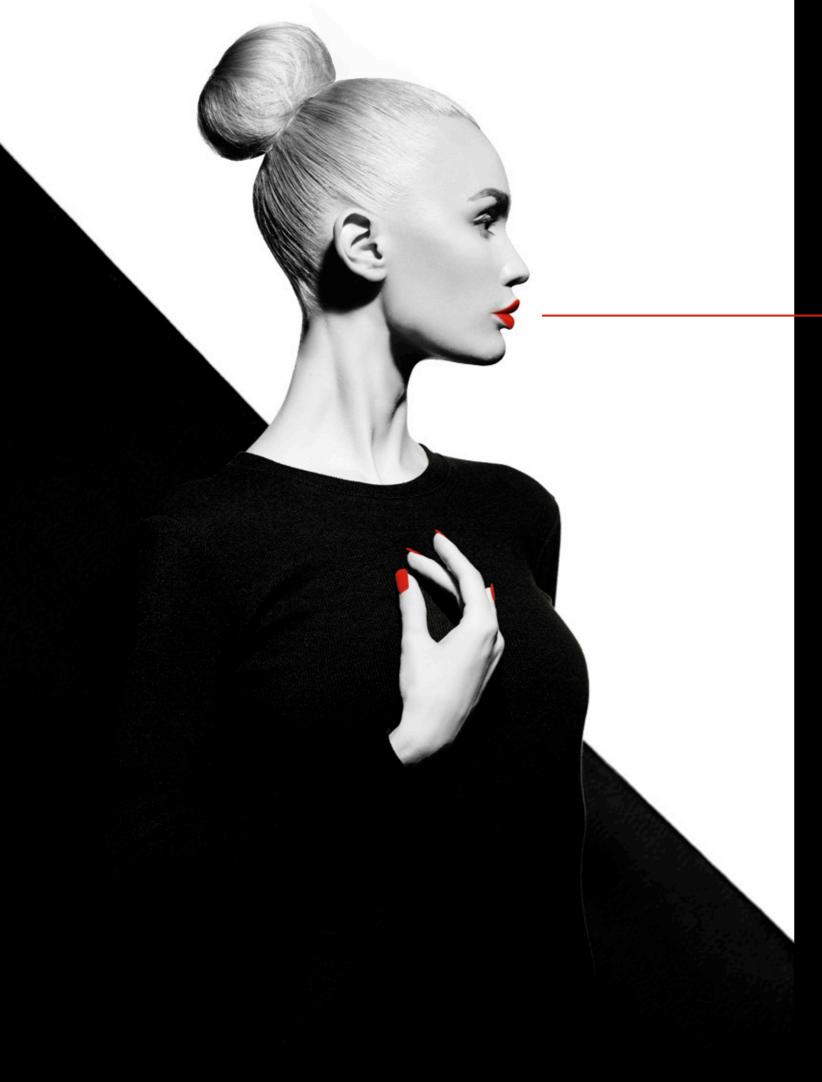

# LIKE VENEZIA



There is not a more unique city in the world than Venice. A city that by modern engineering standards should not exist.

A city built on the sea, that has inspired generations of visitors for centuries.

The original gateway to the east, Venice is a city whose architecture incorporates design aspects from the middle east and Asia, adding to its unique appeal. No other place influences the styling of Sofia more than Venice. Sofia's designer, having attended the school of Architecture at the University of Venice, drew his inspiration during this time in Venice. It is only fitting that this unique city influenced the unique design of our beautiful Sofia range.





# SOFESSIONAL

#### SCOPRI IL PROFILO ITALIANO DI SOFIA

**DESIGN** 

**POWER** 

**GUSTO** 

**UNIQUE** 

Sofia represents the beauty and sophistication that is Italy and the Meneghetti Family has paid tribute to all the unique cultural aspect of this storied country with Sofia and the complete line of Fulgor Milano products. Inspired by all the great regions of Italy, Soifa was born in the heart of the Veneto region, culturally rich in art and tradition. Sofia embodies a contemporary design that is feminine and powerful, which inspires us to prepare dishes worthy of admiration. The Meneghetti Family has presented us with a symbol of the ultimate expression of Italian excellence.

# PROFESSION#

# PROFESSIONAL LINE





# SOFIA PROFESSIONAL



#### CLASSIC BEAUTY

Sofia is a solid, generously sized freestanding range with a clean and rigorous style. Designed, developed and engineered in Italy to exceed all expectations of quality, performance and style. Sofia will captivate the most discerning chef with nuanced features that are traditional yet innovative.

## SOFIA PROFESSIONAL









#### SOFIA IS AN INDIVIDUAL

We designed a professional range with a style and presence unique to her name. Sofia integrates the use of stainless and brushed aluminum for a design that is elegant and distinctive.

#### TOTAL CONTROL AND DELICATE POWER

Every aspect of Sofia is beautiful and her gas cooking surface is no exception. Every burner allows you to temper the most delicate chocolate or sear a steak to perfection.

#### TOTAL ACCESS AT YOUR FINGER TIPS

Choose multiple baking functions, timed bake, meat probe, and a variety of other customizable settings and baking features.

#### **PROFESSIONALLY** CRAFTED

This multifunction range, combines all the features of a fully-equipped professional range with a stainless steel design which highlights the elegance and uniqueness of Italian style.

16 FULGOR MILANO FULGOR MILANO 17



### TRILAMINATE GRIDDLE

As if 6 powerful burners wasn't enough, the addition of a Trilaminate griddle allows additional versatility to the cooking surface. With 12,500 BTU's of even heat, Sofia sears with conviction and the easy to care for surface will be beautiful for its entire lifetime.

### CAST IRON GRATES AND MATTE BURNER BASIN

Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You'll barely notice spillovers in this recessed burner basin and they'll clean up easily, too.





### DUAL BURNER WITH BRASS BURNER RING

For perfect control, easy cleaning, and lasting performance, the brass burner ring and the precision flame ports remain corrosion free.




### ROBUST CONTROL KNOBS

A perfect match for the bold design of the control panel, robust brushed metal knobs ensure easy handling and precise control while cooking.

# 

#### CRESCENDO BURNER

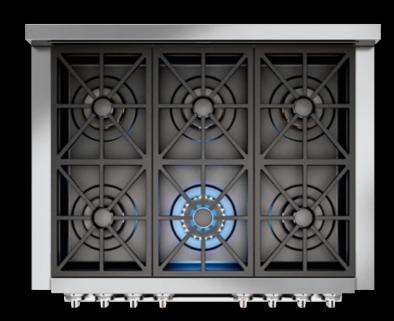

Because precision is important for powerful high and gentle low flames, our sealed burners offer five combinations of flame configurations for near infinite control. Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTU and is also capable of the gentlest simmer aided by its oversized burner cap.



#### FORTE

At the peak of its 20,000 BTU capability, meat is seared to produce a crust worthy of your favorite chef. Large pots quickly recover to a rigorous boil, and no culinary conquest seems unattainable. All burner rings engage to produce the most powerful flame for cooking.

#### **MEZZOFORTE**

2

Perfect al dente pasta is a snap. Progressive control of the burner ensures maximum heat distribution without excessive flame for an even and moderate boil.

#### **MEZZO**

3

Creamy risotto and smooth custards come to life as the burner rings combine to provide enough heat to encourage the cooking but discourage scorching.

#### PIANOFORTE

4

Simmer, poach, or braise your way to a tender sauce, soup or stew. Flame curls around the diffuser cap to barely brush the base of the cooking vessel with perfect control for extended periods of low heat cooking.

#### **PIANO**

5

Melt butter, temper chocolate, or gently coax the flavor from savory vegetables, this lowest setting is achieved by the flame from the simmer burner rolling gently under the diffuser cap to radiate whisper soft heat.



# AUTOGRAPH YOUR KITCHEN MAKE IT EXCLUSIVELY YOURS!

Customize your Sofia kitchen with your name of a chosen. Visit the Fulgor Milano website to create your personalized name plate for the oven door. The complimentary plate will be delivered to your home where your unique Sofia kitchen is exclusively yours.



# " DUAL FUEL

PROFESSIONAL RANGE

THE ART OF COOKING EXPANDED

#### **FULGOR**

MILANO

Thoughtfully designed surface cooking with six burner positions, each with a 5 in 1 Crescendo burner beneath continuous cast iron grates and a Trilaminate Stainless Steel griddle, providing unparalleled power and control to melt, simmer, saute, and sear as you desire. Below the cooking surface, two self cleaning convection ovens with intuitive multiple baking and broiling functions and the convenience of telescoping racks encourages you to cook the way you want.



MILANO 25

#### PROFESSIONAL RANGE CHARACTERISTICS

#### **CAST IRON GRATES**

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.

#### TRILAMINATE GRIDDLE

Functional and beautiful with layers of two unique types of stainless steel for durability and easy cleaning form a three layer griddle with the addition of aluminum for even and consistent heat distribution.

#### UNSURPASSED CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.

#### COOL TOUCH DOOR

4 layers of thermo-reflecting glass ensure the safety of a cool touch door while the oven is on - even at its highest temperature during the self-clean cycle.

#### CONVENIENCE OVEN

Identically featured as its larger mate, but without meat probe, this self-cleaning, multi function convection oven does everything in a smaller space, adding efficiency and flexibility. It even has a telescopic rack.

#### SIX BURNERS

6 cooking zones, each with Crescendo burners create 5 levels of cooking power. At each level, the perfect combination of power and even distribution of heat allows precise results from temper to sear at 20,000 BTU. A combination of burner rings at different levels controls the relation of the flame to the bottom of the cooking vessel, allowing whisper soft heat for melting or rendering to ultra high searing and deglazing.

#### DUAL OVENS

Two self-cleaning convection ovens with multiple baking functions allow for ultimate flexibility, performance and capacity. Telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done.

#### SOFT CLOSING DOOR

Robust stainless oven doors with wide viewing windows get an assist from shock absorbing hinges, facilitating an effortless soft closing oven.


26 FULGOR MILANO 27

10:22 10:22

#### SPECIAL TRILAMINATE STAINLESS STEEL GRIDDLE

The ultimate in performance and beauty, heat is evenly and uniformly distributed across the griddle surface allowing for golden pancakes, perfectly crusted steaks, and everything in between. With an easy to clean surface, the griddle resists discoloration at even the highest temperatures to remain unaffected for years to come.

12,500 BTU tubular aluminum burner with evenly distributed flame ports conducts heat to the griddle for optimal performance at maximum power. 4,200 BTUs at low power for more delicate foods. Sear a steak or make a golden griddle cake with ease.

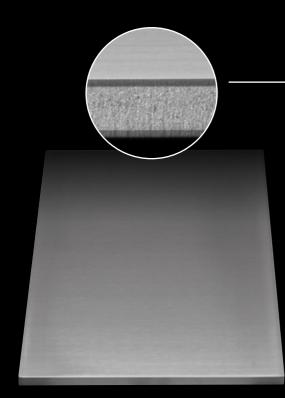

#### **3 METAL LAYERS GRIDDLE**

#### SURGICAL STAINLESS STEE


Provides unrelenting protection against corrosion, pitting, and discoloration, this non-reactive surgical grade stainless ensures easy cleaning and durability.

#### ALUMINUM

Allows for even heat distribution

across the entire grilling surface from edge to edge for precise cooking and consistent browning.

Establishes a stable and rigid foundation for a consistently flat and enduring direct cooking surface.

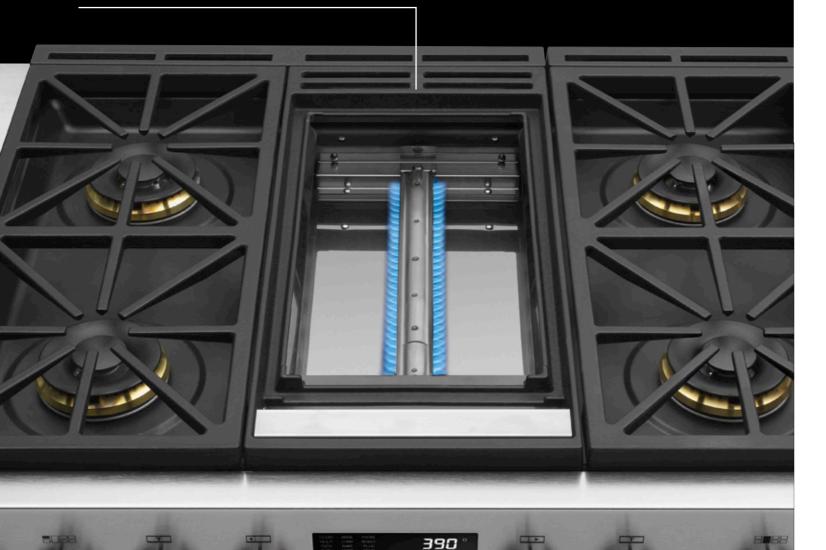

10:22



CODE ID

#### F6PDF486GS1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Trilaminate Stainless Steel Griddle



Dual Convection (main oven)



True Convect (accessory oven)



Soft Closing Door



Self Clean Ovens



Multi-level cooking



1 Telescopic Rack



Cool Touch Door







Fast Pre-Heat

OPTIONAL ACCESSORIES		pag
PDRKIT48	Colour kit	80
FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG48BCI	Island trim	83
F6BG48STD	Standard trim	82
F6BG48HBT	High back trim	82
FMTRP30	Telescopic rack	84
FMTRP18	Telescopic rack	84
FMGRIDCOV48	Griddle Cover	83

#### **TECHNICAL DWG** 170 **TECHNICAL DATA** 188

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 12,500 BTU high / 4,200 BTU low Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

#### **OVENS**

Dual True Convection in main oven and True Convection in accessory oven Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights on main oven 1 Halogen light on convenience oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chromed racks 1 telescopic rack per oven

#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe on main oven only Self-Clean Sabbath Mode

30" DUAL FUEL PROFESSIONAL RANGE

36" DUAL FUEL PROFESSIONAL RANGE

#### F6PDF366S1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



**Dual Convection** 



Soft Closing Door



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Digital Controls



Fast Pre-Heat

TIONIAL ACCESSORIES



OPTIONAL ACCESSORIES		pag
PDRKIT36	Colour kit	81
FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG30BCI	Island trim	83
F6BG36STD	Standard trim	82
F6BG36HBT	High back trim	82
FMGRID36	Griddle	83
FMTRP36	Telescopic rack	84
TECHNICAL DWG	à	171

189

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

#### OVEN

Enameled Broiler Pan

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks 1 telescopic rack

#### **OVEN FUNCTIONS**

**TECHNICAL DATA** 

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode



N

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



**Dual Convection** 



Soft Closing Door



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Digital Controls



Meat Probe



Fast Pre-Heat

OPTIONAL ACCESSORIES		
PDRKIT36	Colour kit	8
FMWOK	Wok ring	83
FMSIM	Simmer plate	8
F6BG30BCI	Island trim	83
F6BG30STD	Standard trim	8
F6BG30HBT	High back trim	8
FMGRID30	Griddle	8
FMTRP30	Telescopic rack	84

**TECHNICAL DWG** 171 **TECHNICAL DATA** 189

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

#### OVEN

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode

36" ALL GAS PROFESSIONAL RANGE

#### F6PGR366S2





Continuous Grate Surface

Heavy Duty Grates



Dual Crescendo Burner



**Dual Convection** 



Soft Closing Door



Cool Touch Door



Multi-level cooking



Telescopic Rack



Digital Controls



Nova Broiler System



OPTIONAL ACCESSORIES		pag
PDRKIT36	Colour kit	81
FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG30BCI	Island trim	83
F6BG36STD	Standard trim	82
F6BG36HBT	High back trim	82
FMGRID36	Griddle	83
FMTRP36	Telescopic rack	84
TECHNICAL DW	<b>V</b> G	171
TECHNICAL DATA		190

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

#### **NEW NOVA BROILER SYSTEM**

Intense heat sears meats and fish locking in juices, with large broiling area. All Gas Pro Ranges ventilation allows for closed door broiling, which ensures constant cooking.

#### OVEN

**Dual Convection** Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks 1 telescopic rack

Enameled Broiler Pan

#### **OVEN FUNCTIONS**

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode

#### SOFIA PROFESSIONAL 30" 30" ALL GAS PROFESSIONAL RANGE



F6PGR304S2

NHeavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



**Dual Convection** 



Soft Closing Door



Cool Touch Door



Multi-level cooking



Digital Controls



Nova Broiler System

#### **OPTIONAL ACCESSORIES**

PDRKIT36	Colour kit	81
FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG30BCI	Island trim	83
F6BG30STD	Standard trim	82
F6BG30HBT	High back trim	82
FMGRID30	Griddle	83
FMTRP30	Telescopic rack	84

pag

**TECHNICAL DWG** 171 **TECHNICAL DATA** 190

#### **SPECIFICATIONS**

#### COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

#### **NEW NOVA BROILER SYSTEM**

Intense heat sears meats and fish locking in juices, with large broiling area. All Gas Pro Ranges ventilation allows for closed door broiling, which ensures constant cooking.

#### OVEN

1 telescopic rack

Enameled Broiler Pan

**Dual Convection** Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks

#### **OVEN FUNCTIONS**

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode





# PROFESSIONAL 36" INDUCTION RANGE


The Sofia induction range features powerful premium induction technology under an elegant glass surface featuring a new 11" Dual Max Power burner.

The instant response and precise control of induction is highlighted by the Digital Minute Minder control, paired beautifully with the easy to clean surface, offering maximum performance while minimizing energy consumption.



# 36" INDUCTION RANGE



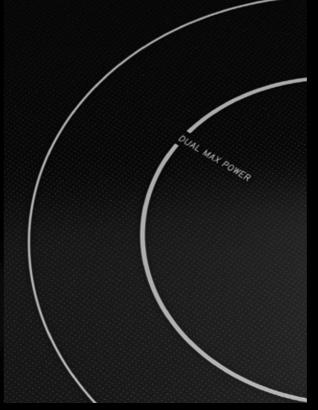



#### **DUAL MAX POWER**

Large pans receive full power for capacity and consistent heat distribution while cooking. The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility.

#### DIGITAL MINUTE MINDER CONTROL

Set it and forget it! The Digital Minute Minder chime will remind you of the end of the timer cycle.

#### COMMAND CONTROL KNOBS

Quick control, efficient and fast, a choice that combines style, practicality and professional touch.

10:55 10:55

F6PIR365S1

 $\infty$ 

30" INDUCTION PROFESSIONAL RANGE

F6PIR304S1

36" INDUCTION PROFESSIONAL RANGE





Easy Clean Ceramic Glass

Power Boost Burner


**Dual Max Power** 

Pan Detection system

Residual Heat Sensor

Soft Closing Door

Self Clean Oven



Telescopic Rack



Cool Touch Door



Digital Controls




Meat Probe



Fast Pre-Heat





**TECHNICAL DWG** 171 **TECHNICAL DATA** 191

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

4 Single Induction cooking zones 1 Dual Max Power with Ø 11" cooking zone

Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Knob Controlled Digital Minute Minder Pot Detection System

#### OVEN

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

2 chromed racks 1 telescopic rack Enameled Broiler Pan

Gross capacity 5.7 cu. ft.


#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode





Easy Clean Ceramic Glass



Pan Detection system



Residual Heat Sensor



Soft Closing Door



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door Digital Controls



Meat Probe



Fast Pre-Heat

**OPTIONAL ACCESSORIES** 

PDRKIT30	Colour kit	81
F6BG30BCI	Island trim	83
F6BG30STD	Standard trim	82
F6BG30HBT	High back trim	82
INDUKIT4	Induction plate adapters	85
FMTRP30	Telescopic rack	84

pag

**TECHNICAL DWG** 171 **TECHNICAL DATA** 191

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Pot Detection System Child Lock Function Failure Codes Indication Automatic Heat-up Time

#### OVEN

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

38 FULGOR MILANO

Child Lock Function

30" PROFESSIONAL DOUBLE OVEN - STAINLESS STEEL

30" PROFESSIONAL SINGLE OVEN - STAINLESS STEEL



#### **F6PSP30S1**



Soft Closing Door

Self Clean Oven

Multi-level cooking

1 Telescopic Rack

Cool Touch Door

Digital Controls Meat Probe

Fast Pre-Heat

Interior Lighting

**Dual Convection** 

Self Clean Ovens

Soft Closing Door



Multi-level cooking

1 Telescopic Rack per oven



Cool Touch Door



Digital Controls



Meat Probe (Upper Oven Only)



Fast Pre-Heat



Interior Lighting



#### **SPECIFICATIONS**

### OVEN

Enameled Broiler Pan

Knob and electronic controls **Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack

#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

#### **OPTIONAL ACCESSORIES**

FMTRP30 Telescopic rack 84 **TECHNICAL DWG** 174 **TECHNICAL DATA** 192

#### **SPECIFICATIONS**

#### **OVENS**

Knob and electronic controls **Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. per oven 2 chromed racks 1 telescopic rack per oven Enameled Broiler Pan

#### **OVEN FUNCTIONS**

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe (Upper Oven Only) Self-Clean Sabbath Mode

#### **OPTIONAL ACCESSORIES** pag FMTRP30 Telescopic rack 84

**TECHNICAL DWG** 174 **TECHNICAL DATA** 192

40 FULGOR MILANO FULGOR MILANO 41

pag

Sliding Telescopic Rails



Keep Warm Function

Slow Cooking



Leavening



Thawing



Soft Closing

### PROFESSIONAL 30" WARMING DRAWER





More than a warming drawer, this functional appliance can slow cook, proof, leaven, and defrost in its compact and fully enclosed space. Warm plates, hold side dishes warm for serving, keep pies warm for dessert, allow homemade bread to rise to perfection.



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL WARMING DRAWER - STAINLESS STEEL

#### **SPECIFICATIONS**

#### **WARMING DRAWER 30"**

Knob Control

Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft.

Convection heating system for even heat distribution All stainless steel structure

Warming Temperature range; min. 86 °F up to 190 °F Slow closing assistance

2 Internal lights

Non-slip rubber mat

#### **DRAWER 30" FUNCTIONS**

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F **OPTIONAL ACCESSORIES** pag **TECHNICAL DWG** 174 **TECHNICAL DATA** 193

36" PROFESSIONAL GAS RANGE TOP

#### F6GRT366S1

CODE ID





Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



#### **SPECIFICATIONS**

#### GAS RANGE TOP

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors

OPTIONAL ACCESSORIES		pag
FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG36BCI	Island trim	83
F6BG36STD	Standard trim	82
F6BG36HBT	High back trim	82
FMGRID36	Griddle	83
TECHNICAL DWG	G	172
TECHNICAL DATA		194

30" PROFESSIONAL GAS RANGE TOP



#### F6GRT304S1

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL INDUCTION RANGE TOP



Easy Clean Ceramic Glass



Power Boost Burner



Pan Detection system



Digital Controls



Residual Heat Sensor



Warming Function



#### **SPECIFICATIONS**

#### **GAS RANGE TOP**

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors

#### **OPTIONAL ACCESSORIES**


**TECHNICAL DATA** 

FMWOK	Wok ring	83
FMSIM	Simmer plate	83
F6BG30BCI	Island trim	83
F6BG30STD	Standard trim	82
F6BG30HBT	High back trim	82
FMGRID30	Griddle	83
TECHNICAL DWG		172

#### **SPECIFICATIONS**

#### INDUCTION RANGE TOP

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power on Indicators Melting and Simmering functions Pot Detection System Child Lock Function Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time



#### **OPTIONAL ACCESSORIES**

TECHNICAL DATA

TECHNICAL DWG 172		
INDUKIT4	Induction plate adapters	85
F6BG30HBT	High back trim	82
F6BG30STD	Standard trim	82
F6BG30BCI	Island trim	83

pag

195

46 FULGOR MILANO FULGOR MILANO 47

pag

194






# PROFESSIONAL PROFESSIONAL COCKTOP



#### STRONG, POWERFUL, DISTINCTIVE

With sleek lines, a continuous surface grate over powerful brass burners, and LED illuminated controls, the Sofia cooktop combines elegant design, responsive performance, and thoughtful convenience. Sofia enters a new realm with this low profile cooktop allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTU Dual Brass Burner of this Sofia cooktop while using the additional 4 Dual Stack Burners, designed to surpass all of your expectations. New Halo Effect knobs let you know at a glance if the gas is on or if residual heat is present, giving you peace of mind at every turn. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.

### HALO VISION HEAT MADE VISIBLE

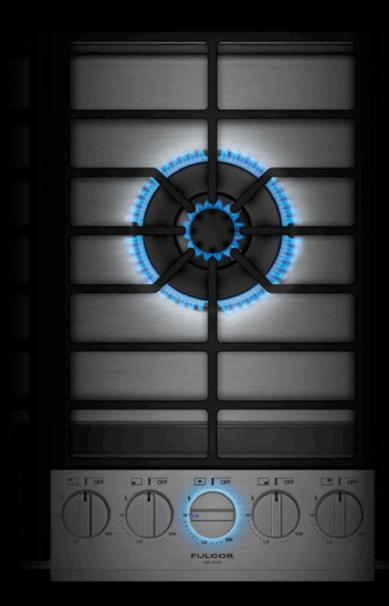

#### HALO CONTROL for when the gas is on

Have you ever walked away from your cook top forgetting a burner is on?

Whether you are searing a steak or tempering chocolate, the glowing halo of white light will alert you to a burner that is on. Walk away from the kitchen with confidence, knowing that your burners are safely off when the halo disappears.





#### HALO SAFE residual heat indicator

A Professional cook top would not be complete without powerful burners and strong cast iron grates. These grates can continue to radiate a heat, even after the burner is off. Protect yourself and your family with our Halo Safe system. A red Halo light around the control knob indicates the presence of residual heat at the grate.

36" PROFESSIONAL PRO GAS COOK TOP

CODE ID

#### F6PGK365S1

Knob control with back light system



1 Center Dual Burner



4 Stack Burner




Heavy Duty Grates



Continuous Grate Surface



Heavy Duty Control Panel

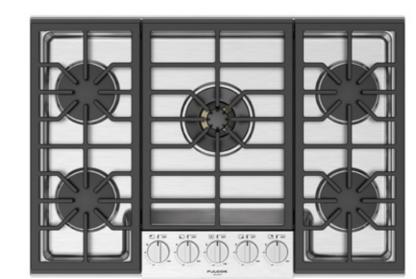

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL PRO GAS COOK TOP

F6PGK305S1

Knob control with back light system



1 Center Dual Burner



4 Stack Burner



Heavy Duty Grates



Continuous Grate Surface



Heavy Duty Control Panel





/ Nordonderderde
TAGOR C. C.

#### **OPTIONAL ACCESSORIES** pag

FMWOK	Wok ring	83
FMSIM	Simmer plate	83

#### **TECHNICAL DWG** 173 **TECHNICAL DATA** 197

#### **SPECIFICATIONS**

#### **COOKING SURFACE**

Full pot stability

Natural Gas (LP Convertible)

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 4 Solid Brass Stacked Burners with 18.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area

**FMWOK** Wok ring 83 **FMSIM** Simmer plate 83 **TECHNICAL DWG** 173 **TECHNICAL DATA** 196

**OPTIONAL ACCESSORIES** 

#### **COOKING SURFACE**

**SPECIFICATIONS** 

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 2 Solid Brass Stacked Burners with 18.000 BTU Max (NG) 2 Solid Brass Stacked Burners with 15.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red)

Heavy duty control panel Large cooking area

Full pot stability Natural Gas (LP Convertible)

52 FULGOR MILANO FULGOR MILANO 53

pag







# PROFESSIONAL HOODS SERIES

Complete your powerful Sofia cooking suite with a matching wall mounted vent hood designed to keep your kitchen environment free from smoke, cooking residue, and excess heat. Motors in sturdy housings combine with Pro Baffle filters to quietly whisk away the effects of your culinary adventures. Your hood allows fresh air to circulate freely in your home, while overhead LED illumination highlights your Sofia cooking surface. Like jewelry for your home, hoods offer the very best of function and design. Your well ventilated kitchen will thank you for it!



## LED LIGHTING UNIFORM CONTROLS

To get the best possible view of your culinary creations while you work, illuminate the entire cooking surface with 6 high powered LED lights. When you are finished cooking, Sofia can bask in the lower level lighting, casting your kitchen as the star of your home.

## ADJUSTABLE DUAL MOTORS WITH DIRECT INDIVIDUAL MOTOR CONTROL

At the heart of the hood, dual motors are housed separately in sturdy bodies, keeping noise and vibration to a minimum. Quiet enough to be unnoticed even at its maximum 1000 cfm speed, the hood works hard to whisk away heat, smoke, odor and moisture, keeping your kitchen fresh and clean while you entertain your family and friends.



#### SOFIA PROFESSIONAL SERIES 600 48"

48" PROFESSIONAL HOOD



CODE ID

#### F6PH48DS1



Filtering



CFM max 1000



6 LED lamps



Noise Level 75 (dB)



Wall hung installation



#### HOOD

Scotch brite stainless steel (AISI 430)
Heavy Duty Control Panel with Knobs
4 + 4 Speed Mechanical Control
LED lighting
Led 6x1,2 W - 3200 K
Double fan motors
1000 CFM
75 dB sound rating
Baffle filter
Minimum distance
Electric hob 20 1/2" - 52 cm
Gas hob 24 3/4" - 63 cm

OPTIONAL ACCESSORIES		pag
F6CK48-12	Chimney cover	86
FMFIL	Charcoal filter	86
TECHNICAL DW	G	175
TECHNICAL DAT	Ά	198

#### SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL HOOD



CODE ID

F6PH36DS1 2 FAN - KNOBS



Filtering



CFM max 1000



4 LED lamps



Noise Level 75 (dB)

Wall hung installation

CODE ID



1 FAN - SLIDER





CFM max 600



4 LED lamps



Noise Level 72 (dB)



Wall hung installation



#### **SPECIFICATIONS**

#### HOOD F6PH36DS1

Gas hob 24 3/4" - 63 cm

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs 4 + 4 Speed - Mechanical Control LED lighting: Led 4x1.2 W - 3200 K Dual fan motors CFM max 1000 75 dB sound rating Baffle filter Minimum distance: Electric hob 20 1/2" - 52 cm

#### HOOD F6PH36S1

Scotch brite stainless steel (AISI 430) Slider controls LED lighting: Led 4x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter Minimum distance: Electric hob 20 1/2" - 52 cm Gas hob 24 3/4" - 63 cm

#### **OPTIONAL ACCESSORIES**

F6CK36-12	Chimney cover	86
FMFIL	Charcoal filter	86
TECHNICAL DWG	TECHNICAL DWG	

#### SOFIA PROFESSIONAL 600 SERIES 30"

30" PROFESSIONAL HOOD



CODE ID

F6PH30S2

111

Filtering



CFM max 600



4 LED lamps



Noise Level 72 (dB)



Wall hung installation

CODE ID

F6PH30S1

1 FAN - SLIDER



Filtering



CFM max 600 2 LED lamps



Noise Level 72 (dB)



Wall hung installation



#### **SPECIFICATIONS**

#### HOOD F6PH30S2

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs 4 Speed - Mechanical Control LED lighting: Led 4x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter Minimum distance: Electric hob 20 1/2" - 52 cm Gas hob 24 3/4" - 63 cm

#### HOOD F6PH30S1

Scotch brite stainless steel (AISI 430) Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter Minimum distance: Electric hob 20 1/2" - 52 cm Gas hob 24 3/4" - 63 cm

**OPTIONAL ACCESSORIES** 

**TECHNICAL DATA** 

F6CK30-12 Chimney cover 86 **FMFIL** Charcoal filter 86 **TECHNICAL DWG** 175

pag

198

60 FULGOR MILANO FULGOR MILANO 61

pag

#### SOFIA PROFESSIONAL 600 SERIES 48"

48" PROFESSIONAL INSERT HOOD



#### F6BP46DS1

CODE ID

<u></u>
ĮΠ

Filtering



CFM max 1000



6 LED lamps



Noise Level 75 (dB)



Ceiling installation



SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL INSERT HOOD

Filtering CFM max 1000 4 LED lamps Noise Level 75 (dB) Ceiling installation

#### **SPECIFICATIONS**

#### **INSERT HOOD**

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs LED lighting: Led 6x1,2 W - 3200 K 4 + 4 Speed - Mechanical Control Baffle filter Dual fan motors - CFM max 1000 75 dB sound rating Minimum distance: Electric hob 20 1/2" - 52 cm Gas hob 24 3/4" - 63 cm

Overall dim - width 45 3/4" - 116 cm Overall dim - height 13 1/8" - 33 cm Overall dim - depth 18 1/2" - 47 cm Cut out (wxd) 43 7/16" x 16 1/2" Gross weight 68 lbs - 31 kg Net weight 57 lbs - 26 kg KW rating 860W - 3.8A Power cord + Plug

#### **OPTIONAL ACCESSORIES** pag **FMFIL** Charcoal filter 86 **TECHNICAL DWG** 175 **TECHNICAL DATA** 199

#### **SPECIFICATIONS**

#### **INSERT HOOD**

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs LED lighting: Led 4x1,2 W - 3200 K 4 + 4 Speed - Mechanical Control Baffle filter Dual fan motors - CFM max 1000 75 dB sound rating Minimum distance: Electric hob 20 1/2" - 52 cm Gas hob 24 3/4" - 63 cm

Overall dim - width 34 1/4" - 87 cm Overall dim - height 13 1/8" - 33 cm Overall dim - depth 18 1/2" - 47 cm Cut out (wxd) 32" 1/16 x 16 1/2" Gross weight 60 lbs - 27 kg Net weight 51 lbs - 23 kg KW rating 860W - 3.8A Power cord + Plug

OPTIONAL ACCESSORIES	
Charcoal filter	86
	175
	199
	Charcoal filter

62 FULGOR MILANO FULGOR MILANO 63

#### **FULGOR**

MILANO

# PROFESSIONAL FRIDGE

#### COLD TEMP. TOTAL CONTROL.


As beautiful as it is functional, the Sofia Professional Fridge and Wine Series features brushed stainless exteriors for maximum impact and a brilliant white aluminum interior. Food preservation is key and like the rest of the Professional Series, we combine the latest technology to ensure the highest performance.

Dual compressors provide independently controlled cooling zones with consistent and precise temperatures throughout, to ensure that the finest foods and wines stay fresher longer.

Robust doors on the Fridge and triple layer UV protected glass on the Wine Cellar protect contents from external temperature and humidity changes which can be damaging to your stored items.

# PROFESSIONAL FRIDGE & WINE



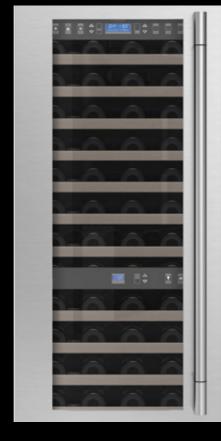

#### FLEXZONE

Fridge, Fresco, or Freezer: you can decide on a whim! Need more space for cold drinks? Turn the bottom Flexzone drawer into a Fresco compartment through a simple menu. You have the flexibility to manage your food preservation how you desire.

#### ICE MAKER

Located in the upper section of the Flexzone drawer, the ice maker uses purified water from the integrated filtering system to produce up to 2.2 lbs of your desired sized cube. Activate SuperIce and increase ice production to 3.3 lbs.

#### WINE CELLAR

Natural beechwood shelves accommodate various sized bottles for secure storage and can even be completely removed for greater flexibility. In addition to humidity and temperature control, Wine Cellars utilize anti-vibration technology and triple pane bronze glass doors to reduce UV rays, protecting your wine collection from external conditions.



24" PROFESSIONAL WINE CELLAR

CODE ID

F7PBW24S1-R (RIGHT DOOR)

CODE ID

F7PBW24S1-L (LEFT DOOR)



Deep-freezing



Hot air ventilation



Rapid Deep Freezing



LED lighting



Noise Level 41 (dB)



Integrated Installation



Holiday Mode



Triple Panel Door



54 Bottles Capacity

Cave Storage Compartment,

Brilliant white aluminium interior

TriZone Bottom Drawer

36" PROFESSIONAL FRIDGE

SOFIA PROFESSIONAL FRIDGE 36"

CODE ID

F7PBM36S1-R (RIGHT DOOR)

CODE ID

F7PBM36S1-L (LEFT DOOR)



Cool Zone 0°C



Deep-freezing



Hot air ventilation



Total No Frost







Integrated Installation



Holiday Mode



Ice Maker



**SPECIFICATIONS** 

**WINE CELLAR** 

Natural Wood Shelves, for 36 bottles Wine Cellar Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting

**OPTIONAL ACCESSORIES** 

**TECHNICAL DWG** 

**TECHNICAL DATA** 

176 201

pag

**SPECIFICATIONS** 

**FRIDGE** 

Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

**OPTIONAL ACCESSORIES** pag **TECHNICAL DWG** 176 **TECHNICAL DATA** 200

68 FULGOR MILANO FULGOR MILANO 69 24" PROFESSIONAL BUILT-IN WINE CELLAR

Cool Zone 0°C



Hot air ventilation



Total No Frost



Rapid Deep Freezing





Integrated Installation



Ice Maker



Overlay Panel



**OPTIONAL ACCESSORIES** 

**TECHNICAL DWG** 

**TECHNICAL DATA** 

REFHANPRO36 Sofia Fridge Pro Handle Kit 87





36" PROFESSIONAL BUILT-IN FRIDGE

CODE ID

F7IBW24O1-L (LEFT DOOR)

F7IBW24O1-R (RIGHT DOOR)

Deep-freezing

Hot air ventilation

Rapid Deep Freezing

LED lighting

Noise Level 41 (dB)

Integrated Installation

Holiday Mode

Triple Panel Door



Overlay Panel

54 Bottles Capacity



**OPTIONAL ACCESSORIES** 

REFHANPRO24 Sofia Wine Celler Pro Handle Kit 87

pag

**TECHNICAL DWG** 177 **TECHNICAL DATA** 201

**SPECIFICATIONS** 

FRIDGE

Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

Fridge Compartment Flexzone Bottom Drawer Total No Frost

**WINE CELLAR** 

Cave Storage Compartment, Brilliant white aluminium interior TriZone Bottom Drawer

70 FULGOR MILANO

FULGOR MILANO 71

pag

177

200

**SPECIFICATIONS** 

Natural Wood Shelves, for 36 bottles Wine Celler Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost

LED Lighting



# SOFIA PROFESSIONAL DISHWASHER 24"

24" INTEGRATED DISHWASHER WITH STAINLESS STEEL PROFESSIONAL EXTERIOR

---

CODE ID

# F6PDW24SS1



Noise Level 49 (dB)



Steel Tub



Fast Wash Cycle



China and Crystal Cycle



1/2 Load Cycle



Delayed Start



27753-5







### **SPECIFICATIONS**

# DISHWASHER

Quiet plus – 49 dB Stainless steel interior tub 10 wash cycles Fast wash cycles Adjustable height upper rack 13 place settings Concealed heating element Extreme wash (sanitization) Professional Handle

OPTIONAL ACCESSORIES	pag
TECHNICAL DWG	174
TECHNICAL DATA	202





# PROFESSIONAL





# **FULGOR**

MILANO



# PERSONALIZE WITH COLOR

Your cooking style is personal and now you can easily personalize your kitchen with color. Dress Sofia in vibrant Venetian Red, snowy Palladio White, glistening Gondola Black, sumptuous Black Velvet, or or glistening Rialto Grey. With a Sofia Color Kit, making a change is breeze, simply replace the door and one piece toe-kick whenever the mood strikes you. Sofia can even change with the seasons to make your kitchen alive with color.



# FREEDOM TO CHOOSE COLOR



MATTE BLACK - RAL 9004





GONDOLA BLACK GLOSSY BLACK - RAL 9004

48" PRO RANGE DOOR CODE PDRKIT48BK



PALLADIO WHITE GLOSSY WHITE - RAL 9016

48" PRO RANGE DOOR CODE PDRKIT48WH



OPTIONAL ACCESSORIES

BLACK VELVET MATTE BLACK - RAL 9004

48" PRO RANGE DOOR CODE PDRKIT48MB



VENETIAN RED GLOSSY RED - RAL 3003

48" PRO RANGE DOOR CODE PDRKIT48RD



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

48" PRO RANGE DOOR CODE PDRKIT48MG



VERSION STANDARD STAINLESS STEEL



GONDOLA BLACK GLOSSY BLACK - RAL 9004

36" PRO RANGE DOOR CODE PDRKIT36BK
30" PRO RANGE DOOR CODE PDRKIT30BK



PALLADIO WHITE GLOSSY WHITE - RAL 9016

36" PRO RANGE DOOR CODE PDRKIT36WH
30" PRO RANGE DOOR CODE PDRKIT30WH



36" PRO RANGE DOOR CODE **PDRKIT36MB**30" PRO RANGE DOOR CODE **PDRKIT30MB** 

**BLACK VELVET** 




VENETIAN RED
GLOSSY RED - RAL 3003
36" PRO RANGE DOOR
CODE PDRKIT36RD
CODE PDRKIT30RD



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

36" PRO RANGE DOOR CODE PDRKIT36MG

30" PRO RANGE DOOR CODE PDRKIT30MG

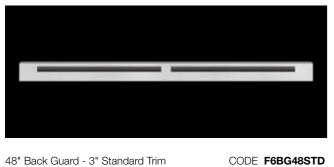

48" Back Guard - 3" Standard Trim



48" Back Guard - High Back Trim



CODE F6BG48HBT

CODE F6BG36HBT

CODE F6BG30HBT



48" Black Cast Iron - Island Trim



CODE F6BG48BCI

CODE F6BG36BCI




Griddle Cover CODE FMGRIDCOV48




36" Back Guard - 3" Standard Trim




36" Back Guard - High Back Trim



36" Black Cast Iron - Island Trim



30" Black Cast Iron - Island Trim

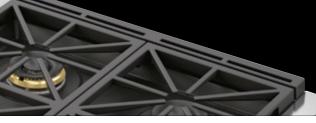

CODE F6BG30BCI



30" Back Guard - 3" Standard Trim

CODE F6BG30STD

CODE F6BG36STD



30" Back Guard - High Back Trim



36" Heavy duty enamelled Cast-Iron griddle






30" Heavy duty enamelled Cast-Iron griddle

CODE FMGRID30



WOK RING

CODE FMWOK







SIMMER PLATE

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface





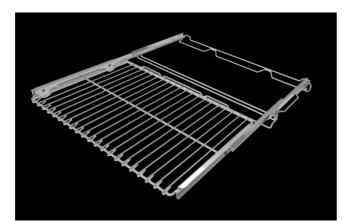

30" Telescopic rack CODE **FMTRP30**Telescopic rack for 30" Professional range and built-in oven



18" Telescopic rack CODE **FMTRP18**Telescopic rack for 18" Oven on 48" Professional range



Trilaminate magnetic plates for non induction pots

CODE INDUKIT4





Chimney cover for model F6PH48S1 12" high CODE **F6CK48-12** 

Chimney cover for model F6PH30S1 12" high CODE **F6CK30-12** 



Chimney cover for model F6PH36S1 12" high CODE **F6CK36-12** 




Charcoal filters (for recirculating installations)


CODE FMFIL



Sofia Wine Celler Pro Handle Kit CODE REFHANPRO24

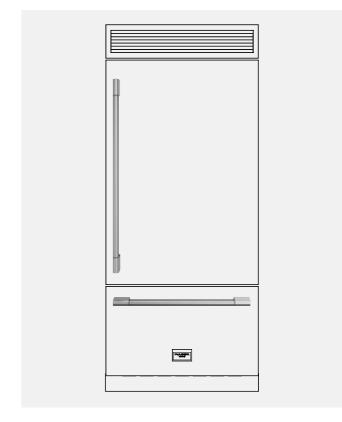


CODE REFHANPRO36 Sofia Fridge Pro Handle Kit

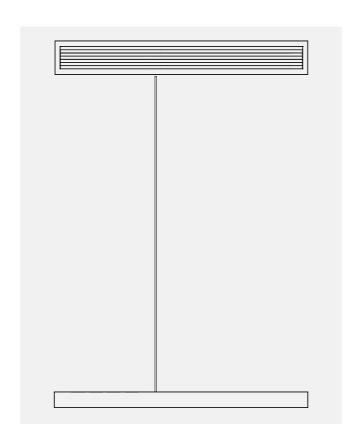

36" Pro Fridge and 24" Pro Wine Cellar Installation Kit; Top Grate, Toe Kick, Vertical Gasket Strip and Insulation Panel.

CODE REFSBSPRO60



36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

CODE REFSBSINT60

# DISTINIO LINE





# CREARE, IMMAGINARE, VIVERE

# 90 FULGOR MILANO

# DISTINTO LINE

This powerful line of products that has, in essence, modularity and the linear stroke of its distinctive features. Like a chef who moves with ease and grace in the kitchen, intuitive displays allow simple recall of recipes and specialties.

The functionality of these new ovens equally matches our modern lifestyle, effortlessly allowing us to make the most of our culinary creations. This new standard is the symbol of modernity, created in Italy.





# MULTIFUNCTION OVENS




Our Creactive control system combines modern technology with simplicity. The touch screen simplifies all procedures and enhances performance by reducing energy consumption while intensifying cooking modes.

The automatic function control system has safety features providing worry-free operation.

# FULGOR MILANO







# TOUCH CONTROL PANEL

COOKING

Everything is under your control with just a touch on the Creactive display.

# INTUITIVE

It only takes a moment to easily find the desired function.

# **MULTITASKING**

All functions help to get the best results while preparing your recipes.

# **CUSTOMIZABLE RECIPES**

Recipes to suit every palate have been pre-programmed, but you can modify and customize them to your specific requirements.

# OUR CREACTIVE CONTROL SYSTEM COMBINES MODERN TECHNOLOGY WITH SIMPLICITY

The CREACTIVE operating system combines technology with ease of use.

The touch screen simplifies the programming process of the ovens and enhances performance by reducing energy consumption and increasing cooking functions.


COOKING


# CREACTIVE

# ASSISTED COOKING FUNCTION

# CONTROL SYSTEM

No more doubts when picking the most suitable cooking function for your meals. Just select the recipe on the display and the oven will automatically initiate the best program. You can modify pre-set recipes to create your own by adjusting cooking times, weights and temperature.














# MULTI-LEVEL **COOKING MODE**

Internal heat remains constant throughout the oven, while aromas and flavors kept separate thanks to the fan assisted system.

# **BROIL**

The most effective way to brown the exterior of a steak or roast while locking in juices to retain moisture and tenderness

# **BAKE**

Optimal for perfect baking: flavors blend effortlessly with consistent even heat throughout the oven cavity.

# PIZZA MODE 590°F

Simultaneously bake two pizzas in only two and half minutes with the maximum temperature of 590°F (310°C).

# CUSTOMIZABLE **RECIPES**

Cooking times and modes have been preprogrammed, but you can modify and customize your recipes to suit every palate and need.

# SELF-CLEANING

The pyrolytic Self-Clean function, selected directly from the display, consists of heating the inside of the oven to very high temperatures in order to burn off any excess grease and food residue. At the end of the procedure, just wipe the remaining residue ashes with a cloth without the use of chemical detergents.

96 FULGOR MILANO FULGOR MILANO 97





# EXTRA LARGE CAVITY

Imagine the efficiency of being able to use multiple levels of a huge oven at once. We consider it an advantage, don't you?

# HALOGEN LIGHTS

700 series ovens have 3 lights 20watt halogen bulbs provide plenty of light for easy viewing.

# CONCEALED BAKE ELEMENTS

The concealed heating element and large broiler make it possible to cook and save energy at the same time.

# PYROLYTIC SELF-CLEAN

Simple, hassle free cleaning. At the end of the self-clean cycle, simply wipe away residue with a damp cloth

# SAFETY FEATURE: COOL TOUCH DOOR

Rest assured, your hands are safe with us. Our cool-door technology has a proven guarantee.

# TELESCOPIC RACK

Our fully retractable telescopic rack makes accessibility to your cooking more convenient.





# **FULGOR** MILANO

# DISTINTO

# OVEN CREACTIVE

**SERIES** 

A modern workhorse that marries style and innovation. With many preset cooking functions, the 700 series ovens help you prepare your meals with efficiency and ease. Child safety locks and cool touch doors ensure you and your family will be protected from high temperatures while cooking and during the self clean cycle. This series offers a versatile self clean mode, a dual convection system for high quality performance and an oversized oven space for big results. With 5 broil levels and a selection of accessories available to you, the 700 series ovens deliver both luxury and convenience.

30" TOUCH CONTROL DOUBLE OVEN - STAINLESS STEEL

30" TOUCH CONTROL SINGLE OVEN - STAINLESS STEEL

FULGOR





CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



**Dual Convection** 



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Meat Probe



Fast Pre-Heat



Interior Lighting





CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



**Dual Convection** 



Self Clean Oven

Multi-level cooking



1 Telescopic Rack per oven



Cool Touch Door



TFT Display



Meat Probe



Fast Pre-Heat



Interior Lighting

OVEN

Creactive Touch Control System

Self-cleaning oven with Multifunction baking

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Enameled Broiler Pan Lock Keys

# **OVEN FUNCTIONS**

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb

Event Logs (for Service) Meat Probe Self-Clean

**OPTIONAL ACCESSORIES** 

FMTR630 30" Telesc. Rack

**TECHNICAL DWG TECHNICAL DATA** 

**OVENS** 

**Dual True Convection** 

Black Porcelain enamel interior

Cool to the touch

Gross capacity 4.4 cu. ft.

1 telescopic rack per oven

Enameled Broiler Pan Lock Keys

Broil

Convection (cooking group)

Recipes

Classic Pizza Function 590°F

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb

Event Logs (for Service) Meat Probe (only upper oven)

Self-Clean

**OPTIONAL ACCESSORIES** pag FMTR630 165 30" Telesc. Rack **TECHNICAL DWG** 178 **TECHNICAL DATA** 205

**Dual True Convection** 

Black Porcelain enamel interior Cool to the touch

Gross capacity 4.4 cu. ft.

2 chromed racks 1 telescopic rack

165

pag

178 204 **SPECIFICATIONS** 

Creactive Touch Control System

Self-cleaning oven with Multifunction baking

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

2 chromed racks

Door Lock

**OVEN FUNCTIONS** 

Bake (cooking group)

Keep Warm (cooking group)

Preset default temperature

Preheat (display instantaneous temperature)

COOKING

30" TOUCH CONTROL DOUBLE OVEN - BLACK GLASS

30" TOUCH CONTROL SINGLE OVEN - BLACK GLASS



CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



**Dual Convection** 



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



TFT Display Meat Probe



Fast Pre-Heat



Interior Lighting



F7DP30B1

CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



@ @ **Dual Convection** 



Self Clean Oven



1 Telescopic Rack per oven

Multi-level cooking





Cool Touch Door



Meat Probe



Fast Pre-Heat



Interior Lighting

**OPTIONAL ACCESSORIES** 

30" Telesc. Rack

FMTR630

**TECHNICAL DWG** 

**TECHNICAL DATA** 

OVEN

Creactive Touch Control System **Dual True Convection** 

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft.

2 chromed racks

1 telescopic rack

Enameled Broiler Pan Lock Keys Door Lock

# **OVEN FUNCTIONS**

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes Classic Pizza Function 590°F Preset default temperature

Preheat (display instantaneous temperature) Fast Preheat Mode

Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service)

Meat Probe Self-Clean

**OPTIONAL ACCESSORIES** 

FMTR630 165 30" Telesc. Rack

pag

**TECHNICAL DWG** 178 **TECHNICAL DATA** 204

# **SPECIFICATIONS**

**OVENS** Creactive Touch Control System

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chromed racks

1 telescopic rack per oven Enameled Broiler Pan

Lock Keys Door Lock

# **OVEN FUNCTIONS**

Bake (cooking group)

Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes

Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service)

Meat Probe (only upper oven)

Self-Clean

COOKING

pag

165

178

205

F7SP30W1

30" TOUCH CONTROL DOUBLE OVEN - WHITE GLASS



CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



**Dual Convection** 



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



TFT Display



Fast Pre-Heat



Interior Lighting



FULGOR



CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



**88 Dual Convection** 



Self Clean Oven



Multi-level cooking



1 Telescopic Rack per oven



Cool Touch Door



TFT Display



Meat Probe



Fast Pre-Heat



FMTR630

Interior Lighting

OVEN

Creactive Touch Control System **Dual True Convection** 

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft.

2 chromed racks

1 telescopic rack Enameled Broiler Pan

Lock Keys Door Lock

# **OVEN FUNCTIONS**

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes

Classic Pizza Function 590°F Preset default temperature

Preheat (display instantaneous temperature)

Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb

Event Logs (for Service) Meat Probe Self-Clean

**OPTIONAL ACCESSORIES** 

FMTR630 165 30" Telesc. Rack

pag

**TECHNICAL DWG** 178 **TECHNICAL DATA** 204 **SPECIFICATIONS** 

**OVENS** 

Creactive Touch Control System

**Dual True Convection** Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft.

2 chromed racks

1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

**OVEN FUNCTIONS** 

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes

Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service)

Meat Probe (only upper oven)

Self-Clean

**OPTIONAL ACCESSORIES** pag

30" Telesc. Rack

165

**TECHNICAL DWG** 178 **TECHNICAL DATA** 205

FULGOR MILANO 107

COOKING





# **FULGOR** MILANO

# DISTINTO OKEN **SERIES**

A sleek European design and flush installation, the 400 series oven shares the same body and soul of the 700 series oven, offering many of the same professional features while providing tremendous value. Available only in a single oven configuration, this series offers an oversized oven capacity, multi pass broil, European convection, concealed bake elements and 8 baking functions; all of which are controlled by an easy to use and extremely reliable control system.

The Athena XS control gives the home chef complete control via easy to use and intuitive controls making this oven a great choice as a primary or secondary oven for a variety of kitchen designs and applications.



OVEN 400 SERIES 30"

CODE ID

# F4SP30S1



True Convection



Self Clean Oven





Cool Touch Door



Interior Lighting



### **SPECIFICATIONS**

OVEN

Knob and electronic controls Single fan true convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks Enameled Broiler Pan

# **OVEN FUNCTIONS**

Convection Bake Convection Broil Convection Roast Bake Broil Thaw (Defrost) Self-Clean

OPTIONAL ACCESSORIES	pa
FMTR630 30" Telesc. Rack	16
TECHNICAL DWG	178
TECHNICAL DATA	206

FULGOR

COOKING

F7DWD30S1

30" WARMING DRAWER STAINLESS STEEL DOOR





Slow Cooking



Thawing



Push Opening



Sliding Telescopic Rails Keep Warm Function Leavening Slow Cooking Thawing

Push Opening





WARMING DRAWER

Knob Control Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution All stainless steel structure

Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door

2 Internal lights

Non-slip rubber mat

# DRAWER 30" FUNCTIONS

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F **OPTIONAL ACCESSORIES** pag **TECHNICAL DWG** 178

**TECHNICAL DATA** 

WARMING DRAWER

Knob Control Installation with Overlay Panel Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft.

Warming Temperature range; min. 86 °F up to 190 °F

2 Internal lights

Non-slip rubber mat

**SPECIFICATIONS** 

Convection heating system for a more heating distribution All stainless steel structure

Push-Pull system to open and close door

**DRAWER 30" FUNCTIONS** Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F

**TECHNICAL DWG** 

**TECHNICAL DATA** 

**OPTIONAL ACCESSORIES** 

pag

179 207

112 FULGOR MILANO FULGOR MILANO 113

207



# **FULGOR** MILANO

# DISTINTO OVEN 100 **SERIES**

A standard-setting series with first-class performance. Many preset cooking functions help you prepare your meals with efficiency and ease. The fastest and most versatile self-clean mode available, featuring an automatic door-latch system.

Child safety locks and cool-touch doors protect you and your family from high temperatures while cooking and during the self-clean cycle. Compact oven cavity dimensions fit in any kitchen and reduce energy consumption while providing ample space for all your cooking needs. A selection of accessories is available for your convenience.

24" MULTIFUNCTION SELF-CLEAN OVEN

30" MULTIFUNCTION SELF-CLEAN OVEN



# F1SP30S1





Multi-level cooking



Interior Lighting



True Convection



Self Clean Oven



Multi-level cooking



Cool Touch Door



Interior Lighting

# **SPECIFICATIONS**

OVEN

Knob and electronic controls True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior 2 Halogen lights Gross capacity 3.0 cu. ft. 2 chromed racks Enameled Broiler Pan (basin + anti splash)

## **OVEN FUNCTIONS**

Convection Bake Convection Broil Convection Roast Bake Broil Thaw (Defrost) Self-Clean

### **OPTIONAL ACCESSORIES** pag FMTR 130 165 Telescopic rack **TECHNICAL DWG** 179

**TECHNICAL DATA** 

### **SPECIFICATIONS**

OVEN

Knob and electronic controls True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior 1 Halogen light Gross capacity 2.6 cu. ft. 2 chromed racks Enameled Broiler Pan (basin + anti splash)

# **OVEN FUNCTIONS**

Convection Bake Convection Broil Convection Roast Bake Broil Thaw (Defrost) Self-Clean

OPTIONAL ACCESSORIES		pag
FMTELG	Telescopic rack	165
TECHNICAL DWG	à	179

208

**TECHNICAL DATA** 

116 FULGOR MILANO FULGOR MILANO 117

208

24" MULTIFUNCTION EASY-CLEAN OVEN

COOKING



## F1SM30S1



Defrost



Multi-level cooking



Cool Touch Door



Interior Lighting



F1SM24S2



True Convection



Multi-level cooking



Cool Touch Door



Interior Lighting

# **SPECIFICATIONS**

Enameled Grill basin

OVEN

Knob and electronic controls Black Porcelain enamel interior 2 Halogen lights Gross capacity 3.0 cu. ft. 2 chromed racks

# **OVEN FUNCTIONS**

Convection Broil Convection Roast Bake Broil Pizza (Lower Conv. Bake) Lower Bake Thaw (Defrost)

# **OPTIONAL ACCESSORIES**

FMTR 130 165 Telescopic rack **TECHNICAL DWG** 179 209 **TECHNICAL DATA** 

### **SPECIFICATIONS**

OVEN

Knob and electronic controls True Convection Black Porcelain enamel interior 1 Halogen light Gross capacity 2.6 cu. ft. 2 chromed racks Enameled Broiler Pan (basin + anti splash)

**OVEN FUNCTIONS** Convection Bake Convection Broil Convection Roast Bake Broil Lower Conv. Bake

**OPTIONAL ACCESSORIES** pag FMTELG 165 Telescopic rack **TECHNICAL DWG** 179

209

TECHNICAL DATA

118 FULGOR MILANO FULGOR MILANO 119

pag



# DISTINTO COCKTOPS COOKTOPS SERIES

The 400 series "Largo" cooktops utilize the most advanced technology available and combine this with a classic Italian design, resulting in a cooktop that not only performs magnificently but also looks spectacular. A design that lends itself to countless application possibilities, the 400 series cooktops also take cooking and maintenance needs into consideration.

All grates are separated in sizes that make them easy to handle and remove for cleaning. The burners are well oriented for ease of use, with unique configurations like a wok burner and fifth burner on a 30" unit, making this cook top one of the most versatile in the category. Explore the Largo cooktop family and enjoy the possibilities; buon appetito!

# DISTINTO GAS COOKTOPS

400 SERIES









COOKING

# CONTINUOUS GRATE SURFACE

Move from one burner to the next with ease and safety.

# DUAL BURNER

Fulgor-Milano uses a dual-flame European-style sealed burner to deliver a wide range of heat.

# SPACE FOR WOK

Our unique configurations allow you to have all the space needed for large pans or even a wok.

# EUROPEAN SEALED BURNERS

Designed with only two removable parts, our sealed burners keep spills from leaking inside the cooktop.

High quality aluminum.

F4GK42S1

36" GAS COOKTOP

44" GAS COOKTOP

nabla

Heavy Duty Grates

送

Continuous Grate Surface



Stainless Steel

Dual Burner

Heavy Duty Grates



Continuous Grate Surface



Dual Burner



Stainless Steel

### **SPECIFICATIONS**

# **GAS COOKTOP**

4 gas burners with 1 Dual Flame burner Electronic Ignition and Re-ignition Flame-out Sensing Heavy duty cast iron grates

**OPTIONAL ACCESSORIES** pag

**FMWOK** Wok ring 164 **FMSIM** 164 Simmer plate **FMSPR** Small Pot Adapter 164

**TECHNICAL DWG** 180 210 **TECHNICAL DATA** 

**SPECIFICATIONS** 

GAS COOKTOP

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates

**OPTIONAL ACCESSORIES** 

**FMWOK** Wok ring 164 **FMSIM** Simmer plate 164 **FMSPR** Small Pot Adapter 164

**TECHNICAL DWG** 180 TECHNICAL DATA 210

pag

24" GAS COOKTOP

30" GAS COOKTOP



F4GK30S1

Heavy Duty Grates



Continuous Grate Surface



Dual Burner



Stainless Steel



Heavy Duty Grates



Continuous Grate Surface



Dual Burner



Stainless Steel

**GAS COOKTOP** 

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates

**OPTIONAL ACCESSORIES** pag **FMWOK** 164 Wok Ring **FMSIM** Simmer Plate 164

**TECHNICAL DWG** 181 211 **TECHNICAL DATA** 

Small Pot Adapter

164

**FMSPR** 

**SPECIFICATIONS** 

GAS COOKTOP

4 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing

Heavy duty cast iron grates

**OPTIONAL ACCESSORIES** pag **FMWOK** Wok Ring 164 **FMSIM** Simmer Plate 164


**TECHNICAL DWG** 181 TECHNICAL DATA 211

Small Pot Adapter

164

**FMSPR** 

126 FULGOR MILANO

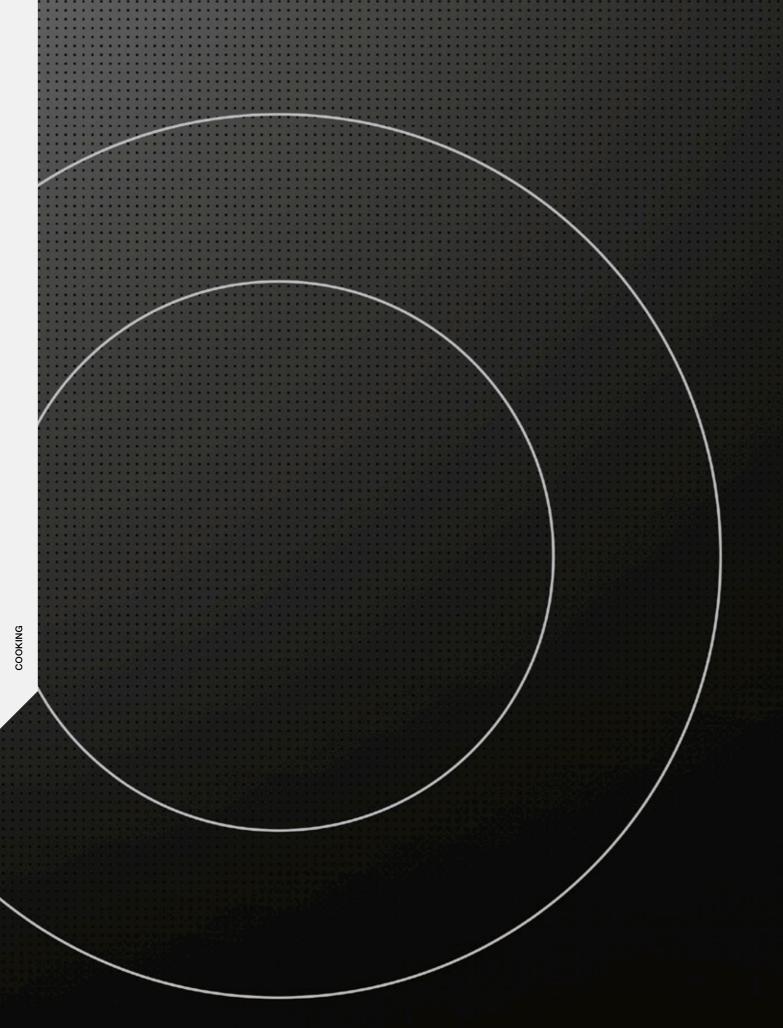

# FULGOR MILANO

# INDUCTION COCKTOPS 700 SERIES

Our 700 series induction cooktops follow the same design criteria of all our Fulgor-Milano products; style, function, and performance are at the heart of this product. Like our radiant touch cooktops, the induction units are finished with a subtle yet elegant aluminum trim that exudes luxury while offering all of the features you expect from a premium cooking appliance. Our induction cooktops offer the power and control of a gas cooktop with the cleanability of a radiant cooktop, giving you the best of both worlds. From tempering fine chocolate, braising a classic Ossobuco, or bringing a 15 quart stock pot to boil in minutes, the possibilities are endless with our induction technology.

# INDUCTION COOKTOPS 700 SERIES





# EXTRA LARGE ZONE AND BRIDGE ELEMENT

Maximum flexibility in how you use the cooktop.

# SLIDE TOUCH CONTROLS

Each cooking zone has its own slide touch control for precise selection of power.

# INDUCTION

The pan creating its own heat means cooking safely without compromise. Since there is no heat transfer from a conventional burner through the glass, induction cooking surfaces use the exact amount of energy needed - no more, no less!

# **FRAME**

Aluminum frame stainless steel color: Sophisticated and functional! Adds a touch of elegance while protecting the glass edge.

# LOW TEMPERATURE FUNCTION

Low enough to temper chocolate or hold delicate sauces without using a double boiler.

 $\bigcirc$ 

30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



## F7IT36S1



Slide Touch Control



Bridge Zone



Pan Detection system



Residual Heat Sensor



Frame Creactive



Digital Minute Minder



## F7IT30S1

	****
	1000
	_

Easy Clean Ceramic Glass



Slide Touch Control



Pan Detection system



Residual Heat Sensor



Frame Creactive



Digital Minute Minder

# **SPECIFICATIONS**

INDUCTION COOKTOP 5 Induction cooking zones 11" large cooking zone Bridge zone on the right side Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder

Pot Detection System Child Lock Function Independent timer for each zone Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

**OPTIONAL ACCESSORIES** 

INDUKIT4 Pot Induction Adapter 166 **TECHNICAL DWG** 182 **TECHNICAL DATA** 212 **SPECIFICATIONS** 

INDUCTION COOKTOP


4 Induction cooking zones 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder


Pot Detection System Child Lock Function Independent timer for each zone. Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

**OPTIONAL ACCESSORIES** pag INDUKIT4 Pot Induction Adapter 166 **TECHNICAL DWG** 182 **TECHNICAL DATA** 212

132 FULGOR MILANO FULGOR MILANO 133

pag

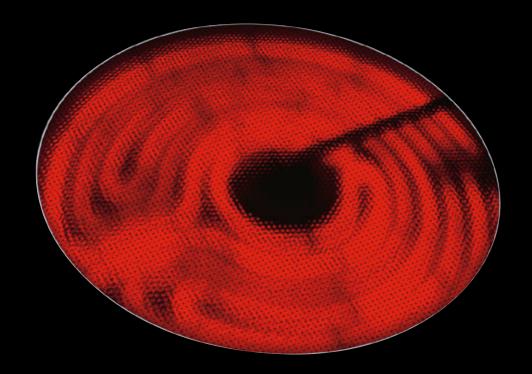

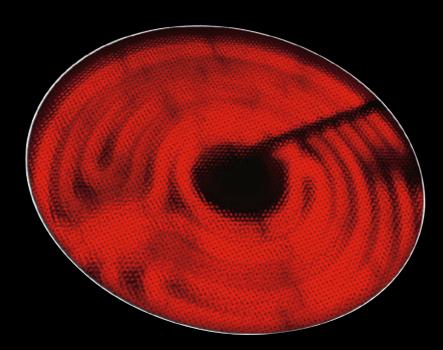


# FULGOR MILANO

# DISTINTO RADIANT COKTOPS 600 SERIES

Beautiful intuitive controls designed with elegance and precision. Radiant touch cooktops deliver quick and reliable performance with maximum flexibility. Touch controls with patented Peacock control sliding bar for power-level selection and fast boil with automatic power reduction.

# RADIANT COOKTOPS SERIES



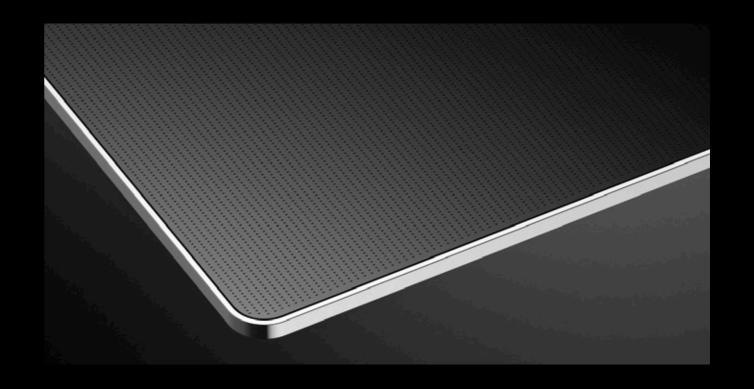

# ELECTRONIC CONTROL

Fine-tuning of lower temperatures plus timer function is standard with our slide touch control bar and "Peacock" power display.

# FRAME

Polished aluminum frame: Sophisticated and functional!

F6RT30S2

36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

F6RT36S2





Easy Clean Ceramic Glass



Slide Touch Control



Bridge Zone



Triple Radiant



Timer



Residual Heat Sensor



30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



0111000



Easy Clean Ceramic Glass



Slide Touch Control



Double Radiant



Triple Radiant



) Timer



Residual Heat Sensor



Frame Creactive

SPECIFICATIONS

RADIANT COOKTOP

Failure Codes Indication

Digital Display for Power Level
Low Power Scale for Delicate Cooking
Control Display Lock
Automatic Fast Boil Function
Power and Hot surface Indication
Timer Functions
Timer Display
Acoustic Buzzer
Independent timer for each zone
Booster function for each cooking zone

OPTIONAL ACCESSORIES

TECHNICAL DWG
TECHNICAL DATA

183 214

pag

SPECIFICATIONS

Digital Display for Power Level Low Power Scale for Delicate Cooking Control Display Lock Automatic Fast Boil Function

Power and Hot surface Indication Timer Functions

RADIANT COOKTOP

Timer Display
Acoustic Buzzer

Independent timer for each zone.

Booster function for each cooking zone

Failure Codes Indication

OPTIONAL ACCESSORIES pag

TECHNICAL DWG 183
TECHNICAL DATA 215

# RADIATOPS COCKETOPS

SERIES

Our 300 series cooktops offer the same elegant European design and family line as our radiant touch and induction cooktops but in a package that offers great value and performance to the consumer. The manual controls are reliable and accurate and continue to be the most user friendly of all control systems available today. Even the most discerning cooks will be impressed with the functionality and performance of this mainstay. Like all Fulgor-Milano cooktops the 300 series offers a shallow profile for countless installation options.



# RADIANT COOKTOPS 300 SERIES 24"

24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM

# CODE ID F3RK24S2





Easy Clean Ceramic Glass



Double Radiant



Residual Heat Sensor



Frame Creactive





**SPECIFICATIONS** 

## RADIANT COOKTOP

Power on Indication Hot surface Indication

OPTIONAL ACCESSORIES	pag
TECHNICAL DWG	183
TECHNICAL DATA	216



#### FULGOR MILANO

## HOODS 600-400 SERIES

As important as it is to have a cooking product give you the performance to create all of your cooking masterpieces, effective ventilation is essential to remove cooking odors and excessive heat from the kitchen. To compliment our line of cooking products we offer a complete range of ventilation products which are also hand crafted in Italy and meet all of the criteria one would expect. Quality, performance, fit and finish, are all embodied in our ventilation products. Let us help you find the best solution to meet your individual performance requirements and design needs.

## HOODS 600-400

**SERIES** 







Stainless steel and dishwasher safe, our baffle filters allow for perfect filtering of cooking vapors and grease while still offering efficient suction.

LED

For perfect illumination of your cooking surface.

PERFECT QUALITY

Smooth weld finished corner surface.

200

28" INSERT HOOD

34" INSERT HOOD



F6BP34S1

CFM max 600



LED Lighting



Noise Level 69 (dB)



Ceiling installation



F4BP28S1

CFM max 600



LED Lighting



Noise Level 69 (dB)



Ceiling installation

**SPECIFICATIONS** 

**INSERT HOOD** 600 CFM

69 dB sound rating Pro Baffle Filters LED Lighting

**OPTIONAL ACCESSORIES** pag **FMFIL** Charcoal Filters 166

**TECHNICAL DWG** 

**TECHNICAL DATA** 

**SPECIFICATIONS** INSERT HOOD

600 CFM 69 dB sound rating Baffle Filters LED Lighting

**OPTIONAL ACCESSORIES** pag **FMFIL** Charcoal Filters 166

**TECHNICAL DWG** 184 TECHNICAL DATA 217

146 FULGOR MILANO FULGOR MILANO 147

184

217

30" UNDERCABINET HOOD

36" UNDERCABINET HOOD

F4UC36S1



CFM max 450



LED Lighting



Noise Level 69 (dB)



Wall hung installation



F4UC30S1

CFM max 450



LED Lighting



Noise Level 69 (dB)



Wall hung installation

**SPECIFICATIONS** 

**INSERT HOOD** 450 CFM 69 dB sound rating Baffle Filters LED Lighting

**OPTIONAL ACCESSORIES** pag **FMFIL** Charcoal filters 186 **TECHNICAL DWG** 184 **TECHNICAL DATA** 217

INSERT HOOD 450 CFM 69 dB sound rating Baffle Filters LED Lighting

**SPECIFICATIONS** 

**OPTIONAL ACCESSORIES** pag **FMFIL** Charcoal filters 186 **TECHNICAL DWG** 184 TECHNICAL DATA 217

148 FULGOR MILANO







#### COLD TEMP. UNDER CONTROL.

The fridge was developed to be optimized for complete integration and designed to offer maximum storage capacity. The dual-movement hinges ensure that all the fridge drawers extend fully when open. The interior is a brilliant white, for striking effect.

Fulgor Milano Wine Cellars store wine under ideal conditions, designed to eliminate the four enemies of wine: heat, humidity, light, and vibration. With all of the functional and aesthetic features of our refrigerators, significant attention was paid to the added features of customized humidity and temperature control, ensuring the optimal environment for aging your wine collection.

#### 2

# FRIDGE WINE.



#### **DUOPRO**

Dual variable speed compressors and two dedicated evaporators ensure smooth, quite, energy efficient operation.





#### SOFT-CLOSING SYSTEM

State-of-the-art mechanisms ensure the slow and silent closing of drawers and doors every time.







#### INTERIOR CONVENIENCE

Brilliant white aluminum interior walls combine with a powerful LED lighting system to create a striking effect and a bright interior. With a state of the art adjustable glass shelving system and door bins, convenience is key while the advanced refrigeration system keeps your food fresher longer.

#### **OPTIVISION**

The Optivision lighting system uses modern LED technology to ensure an optimal view of the interior. Ten LED arrays light the refrigerator compartment from above, while 7 individual spot lights illuminate distinct areas of the fridge and fresh food compartments and Flexzone drawer.

#### **CUSTOM SIZED ICE**

With the Ice Maker menu you can choose the size of the ice cubes produced automatically between large and medium.

#### WINE CELLAR

The electronic control enables the preferred humidity level to be chosen, between high, medium and low, ensuring the correct preservation of corks, a fundamental element for the storage of fine wine. Not just tasting temperature: the Cave storage compartment can also be used to store red wines to be aged over a long period thanks to the accurate temperature and humidity control.

36" PROFESSIONAL BUILT-IN FRIDGE

Cool Zone 0°C



Deep-freezing Hot air ventilation




Total No Frost



Rapid Deep Freezing





Integrated Installation



Holiday Mode




Ice Maker



**BUILT-IN WINE CELLAR 24"** 

24" PROFESSIONAL BUILT-IN WINE CELLAR

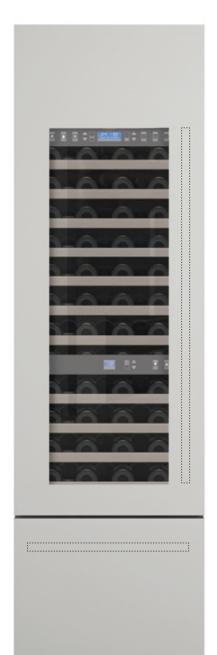

F7IBW24O1-R (RIGHT DOOR)

(LEFT DOOR)

CODE ID

F7IBW24O1-L



Deep-freezing



Hot air ventilation



Rapid Deep Freezing



LED lighting



Noise Level 41 (dB) Integrated Installation



Holiday Mode



Triple Panel Door



54 Bottles Capacity



Overlay Panel

**SPECIFICATIONS** 

**WINE CELLAR** 

Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Celler Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior TriZone Bottom Drawer

**OPTIONAL ACCESSORIES** 

pag

185

219

**TECHNICAL DWG TECHNICAL DATA** 

Note: Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

**FRIDGE** 

Fridge Compartment TriZone Bottom Drawer Total No Frost Stainless Steel Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

**SPECIFICATIONS** 

**TECHNICAL DWG** 185 **TECHNICAL DATA** 218

pag

Note: Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer





#### FULGOR MILANO

# DISTINTO DISHWASHERS 600 SERIES

We love preparing meals for family and friends, but with that comes the clean up. To make life easier, Fulgor Milano offers three distinct styles of dishwashers maintaining the design integrity of your kitchen. Choose between Professional, Distinto, or Integrated which will accept a custom panel to match your cabinets. Our Italian built dishwashers offer all of the features that have become the standard in premium dishwashers models on the market today. Quiet performance, stainless interior, flow-through heater, adjustable upper racks and amazing washing results are just some of the features you can expect from our dishwashers.

## DISHWASHERS 600

**SERIES** 



#### AQUASTOP

Have peace of mind with the Aquastop feature that detects and prevents water leaks.

#### CUSTOMIZABLE

Offers flexibility while arranging dishes for wash.





#### UPPER BASKET

Designed for better accommodation of different sizes of cups and glasses.

#### LOWER BASKET

Robust and roomy, the lower basket can accommodate large pots.

#### MICRO FILTER

With three levels of filtering, our micro filter gives you the best cleaning performance.

#### WATER SOFTENER

For flawless cleaning even with hard water.

#### **ADJUSTABILITY**

The height-adjustable upper rack easily accommodates a variety of glassware sizes and makes room for larger items below.

CLEA

24" FULLY INTEGRATED DISHWASHER

F6DW24FI1

24" INTEGRATED DISHWASHER WITH STAINLESS STEEL EXTERIOR





#### F6DW24SS1

Noise Level 49 (dB)



Steel Tub



Fast Wash Cycle



Steel Tub

Noise Level 49 (dB)

Fast Wash Cycle

**SPECIFICATIONS** 

INTEGRATED DISHWASHER

Quiet plus – 49dB Stainless steel interior tub 10 wash cycles Fast wash cycles Adjustable height upper rack 13 place settings Concealed heating element

Extreme wash (sanitization)

**OPTIONAL ACCESSORIES** 

**TECHNICAL DWG** 

**TECHNICAL DATA** 

pag

186

220

**SPECIFICATIONS** 

INTEGRATED DISHWASHER

Quiet plus – 49dB Stainless steel interior tub 10 wash cycles Fast wash cycles Adjustable height upper rack 13 place settings

Concealed heating element Extreme wash (sanitization)

Custom overlay panel-ready

**OPTIONAL ACCESSORIES** pag **TECHNICAL DWG** 186

TECHNICAL DATA

221



# DISTINTO ACCESSORIES OPTIONAL





CODE FMWOK



Small pot reduction


CODE FMSPR

Uniquely creactiveed accessory allows you to use pans smaller than 4 inches on a stable, flat cooking surface




Wok ring

For best results with a wok, use this accessory with the high-BTU burner specifically creactiveed for wok cooking.

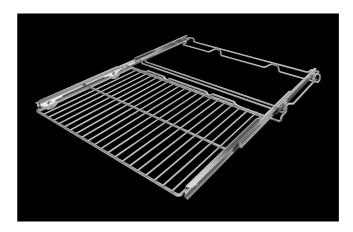

30" Telescopic Oven Rack

CODE FMTR630

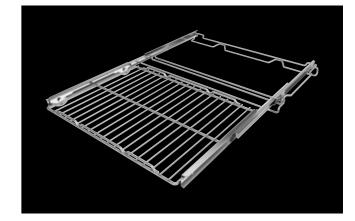

30" Telescopic Oven Rack

CODE FMTR130



Simmer plate

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface.



24" Telescopic guides

 ${\tt CODE} \ \textbf{FMTELG}$ 



Trilaminate magnetic plates for non induction pots CODE INDUKIT4

DISTINTO HOOD OPTIONAL ACCESSORIES



Charcoal filters (for recirculating installations)


CODE FMFIL



36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

CODE REFSBSINT60

Note: Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer.

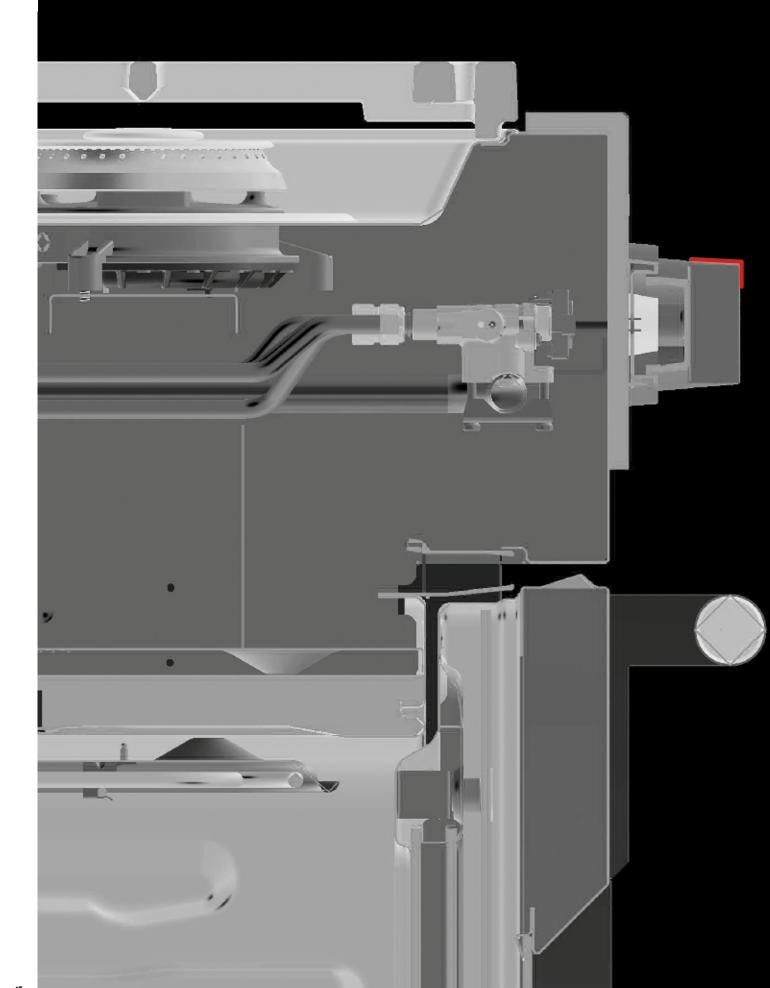


FULGOR MILANO


## TECHNICAL DIMENSION


PROFESSIONAL


AND


DISTINTO

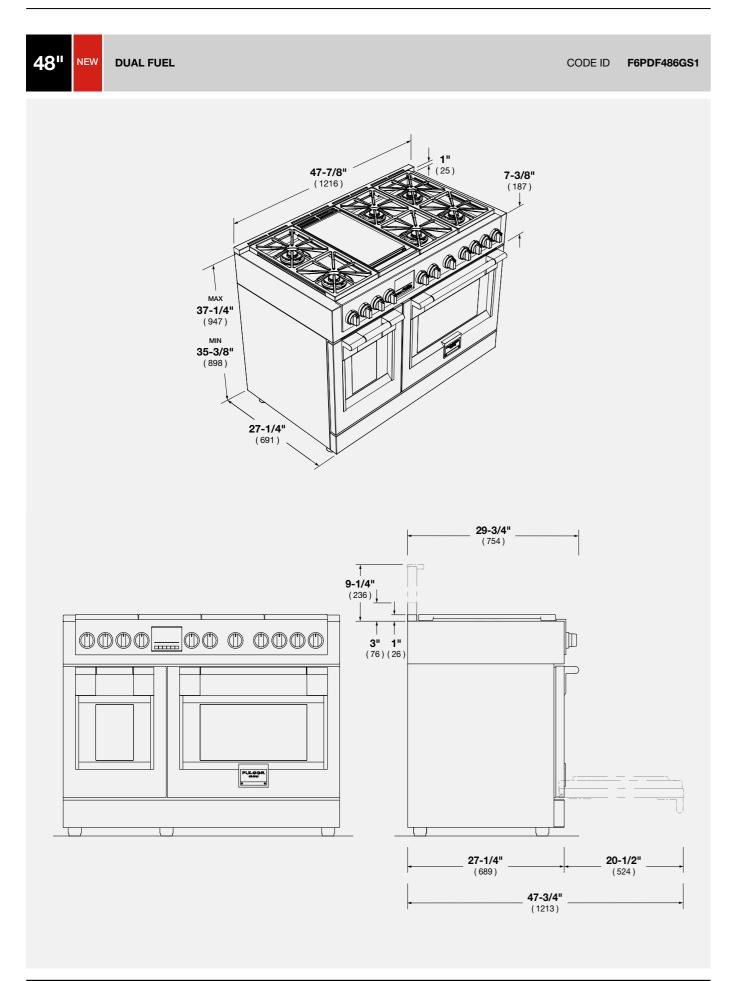


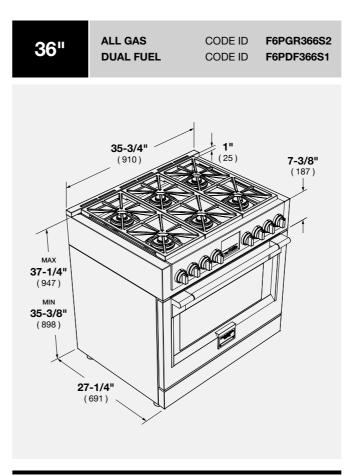


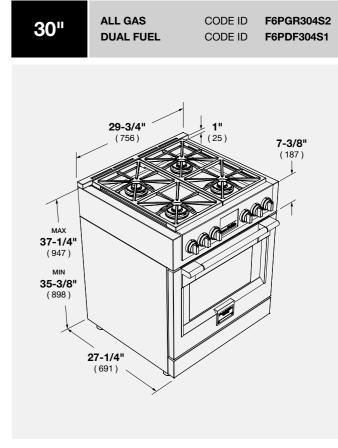


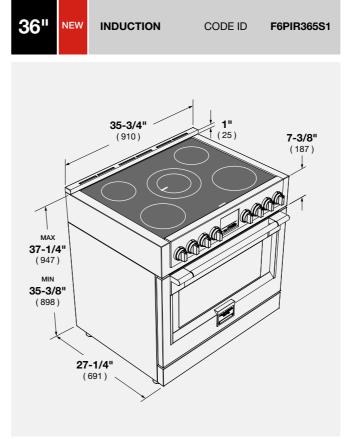


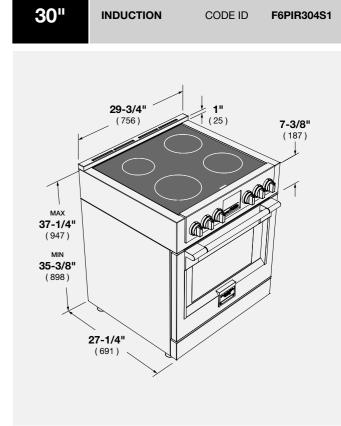


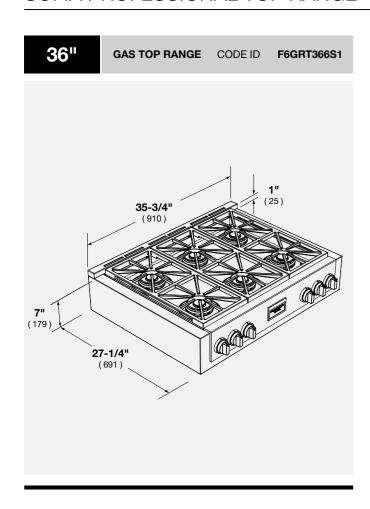


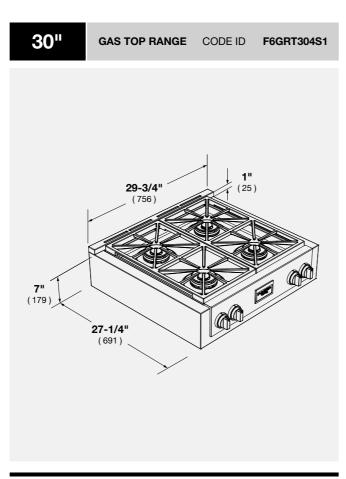


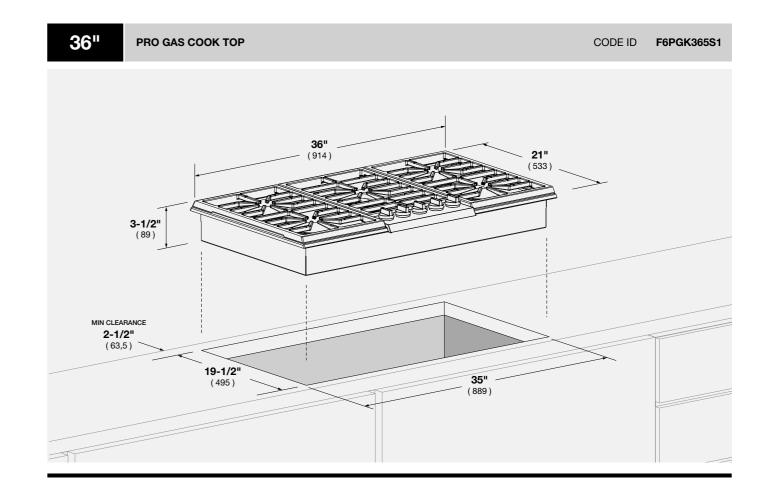


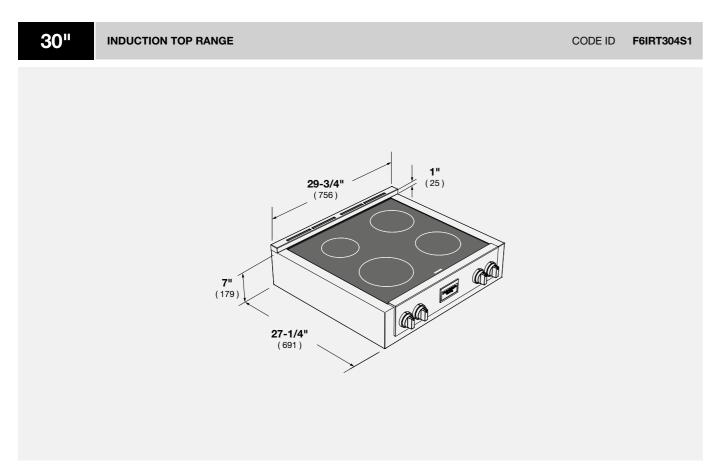


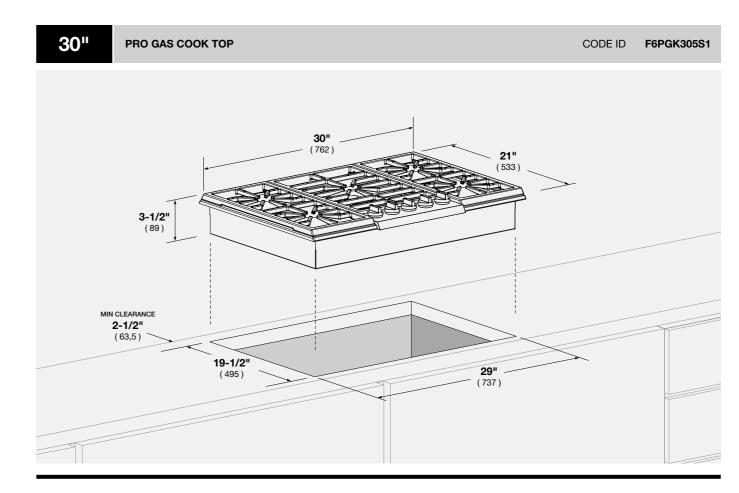


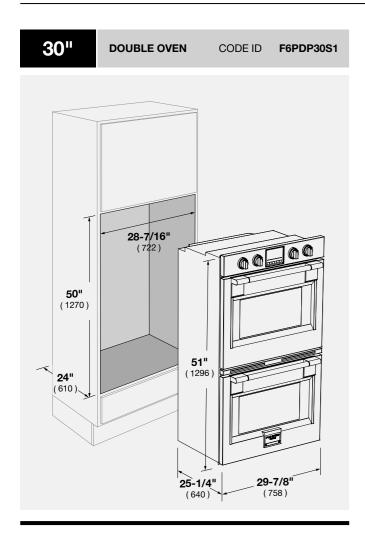


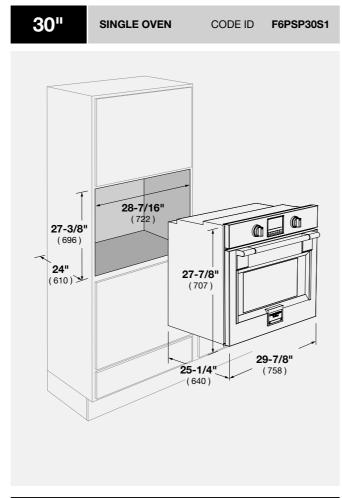


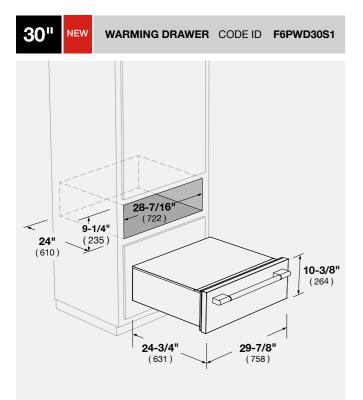


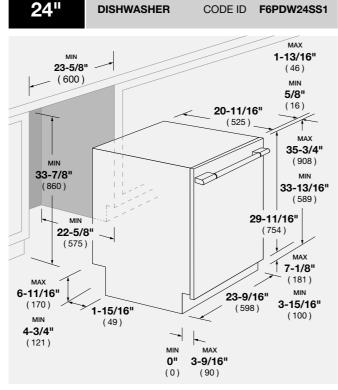


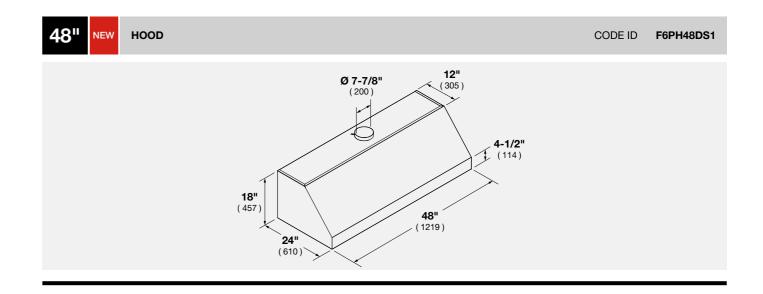

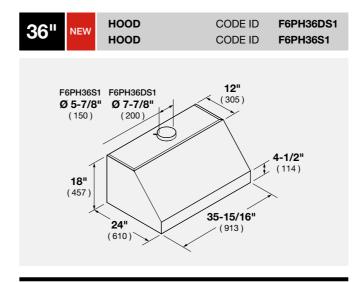


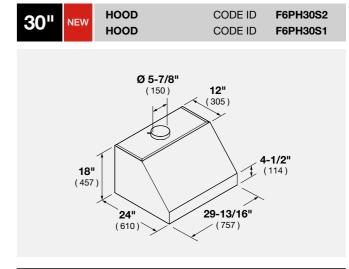


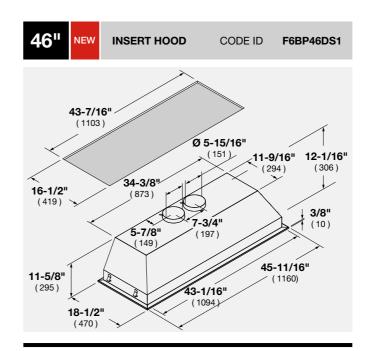


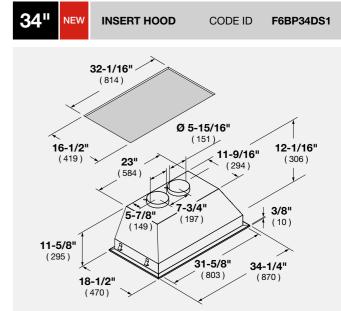



DWG

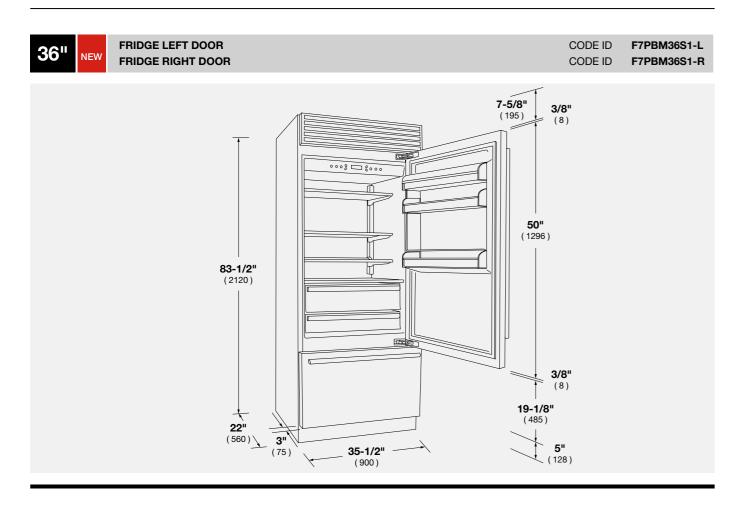


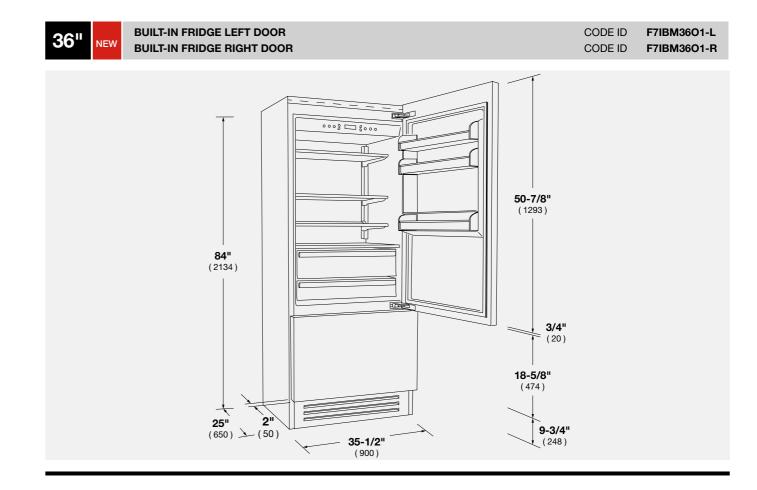


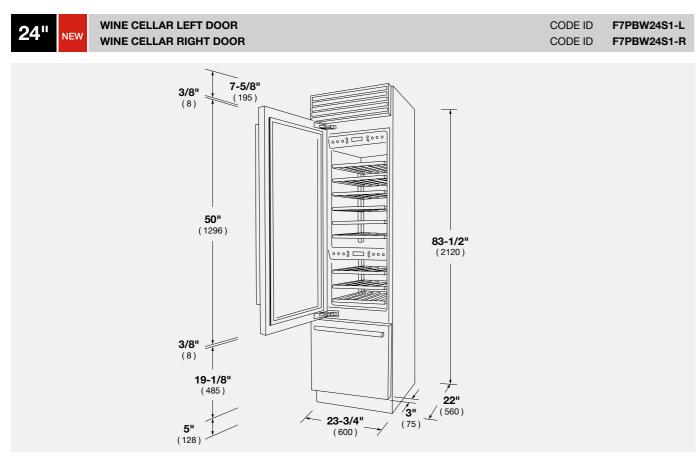

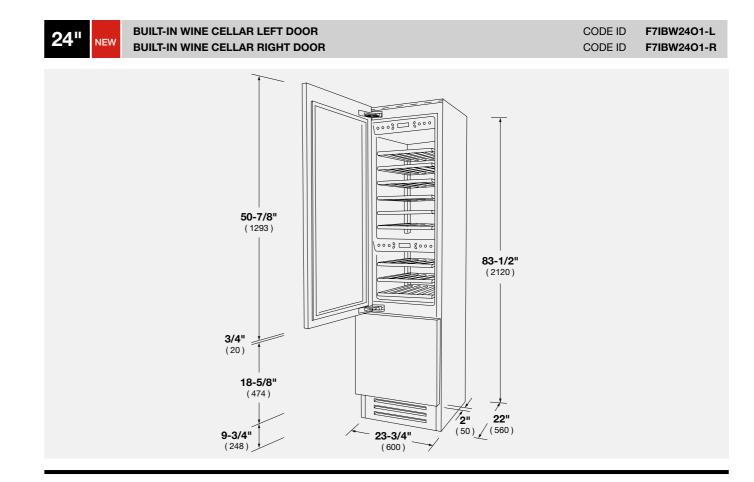

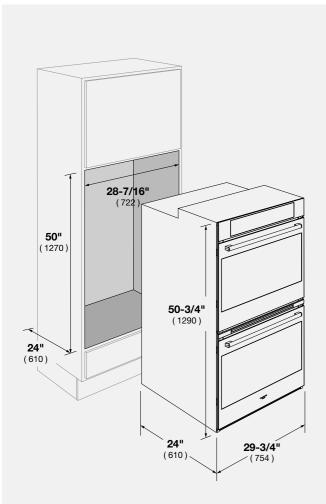

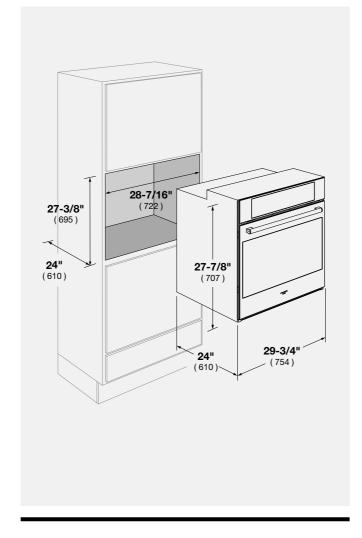


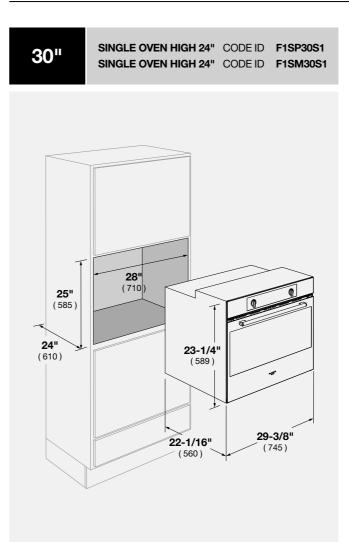


TECHNICAL DIMESION


SINGLE OVEN


CODE ID F1SP24S2

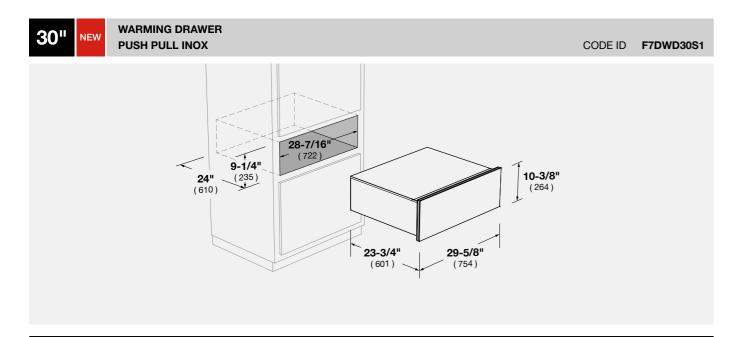


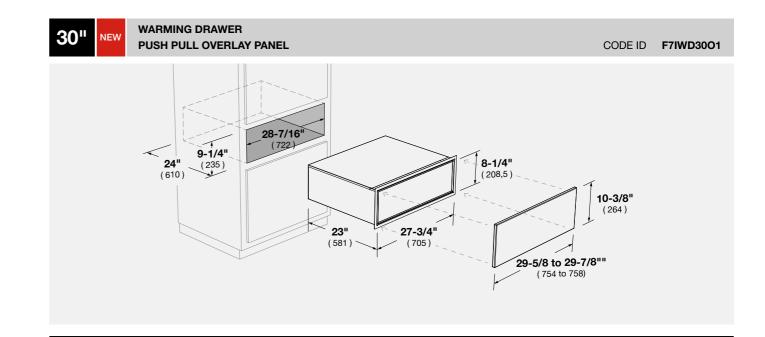



TECHNICAL DIMESION

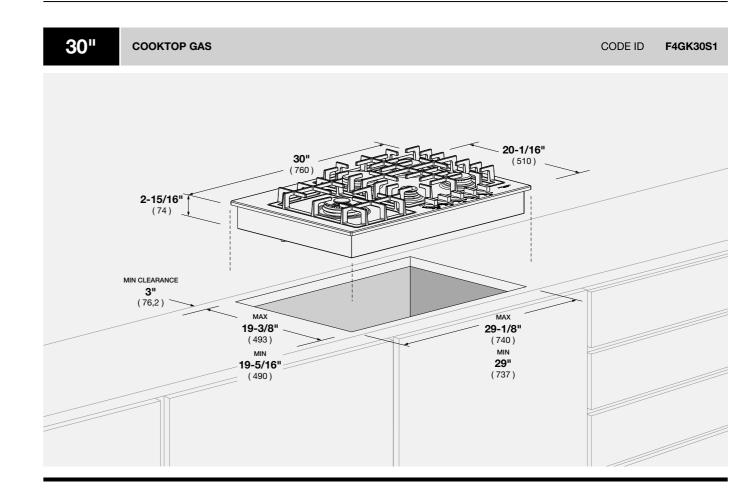


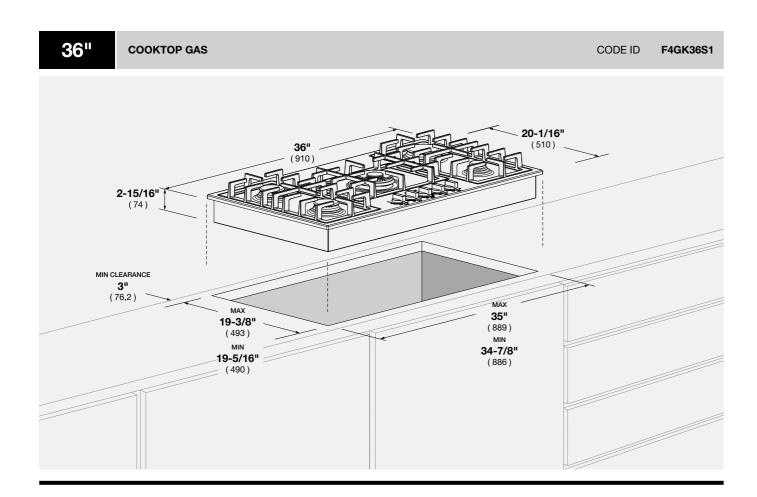


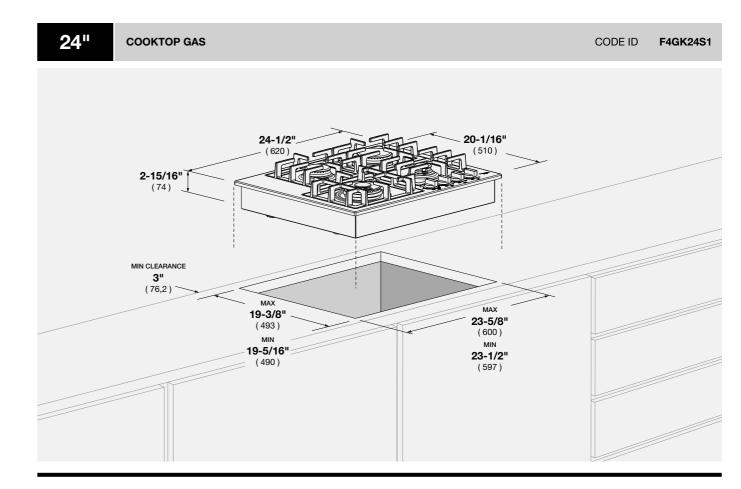


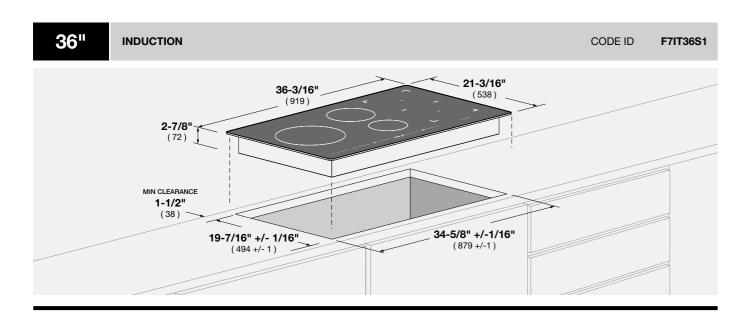


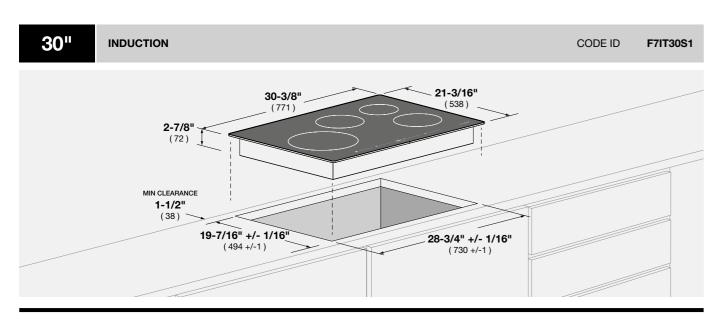


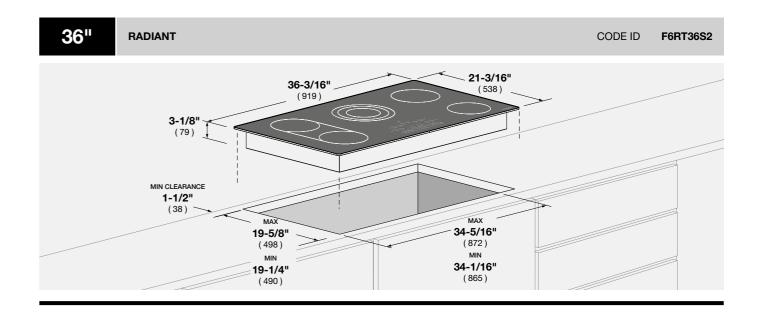


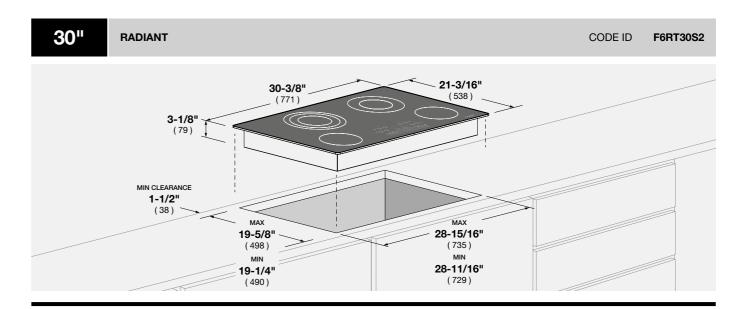


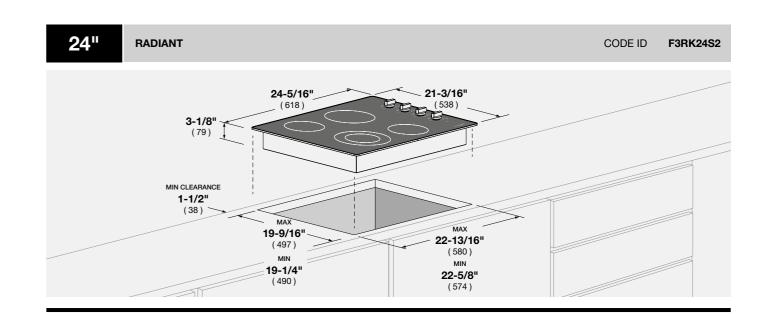


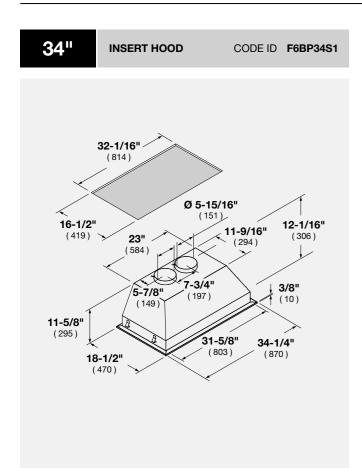


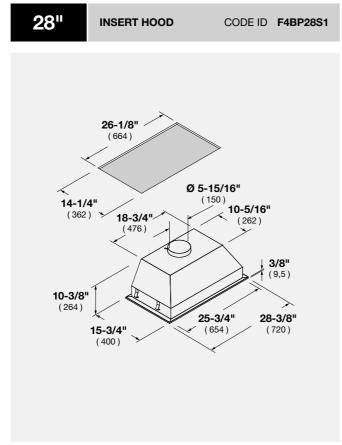

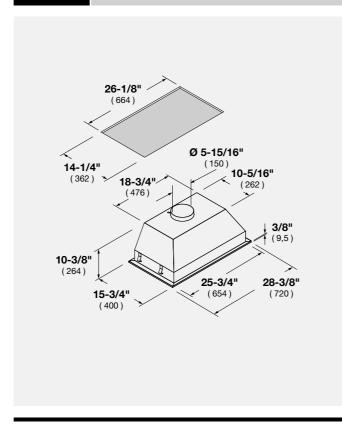

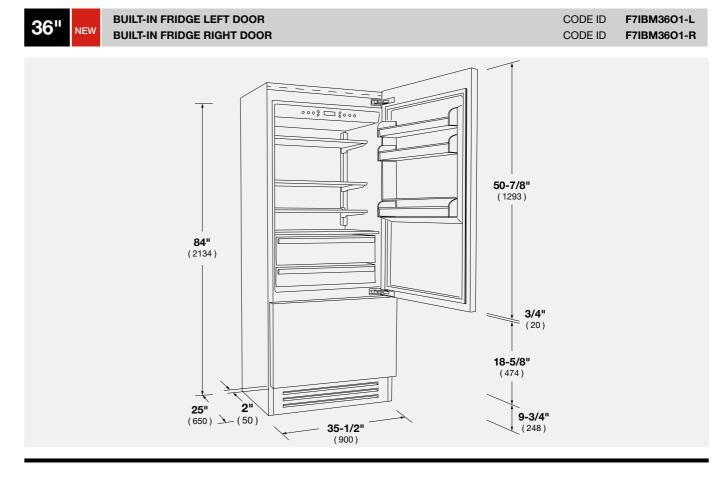


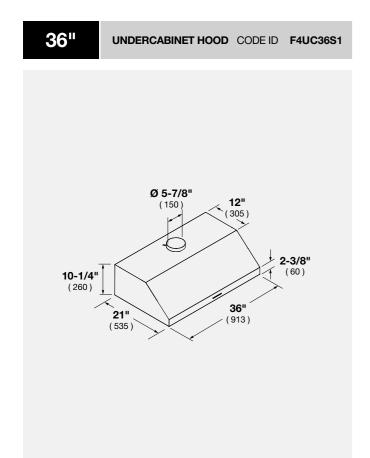


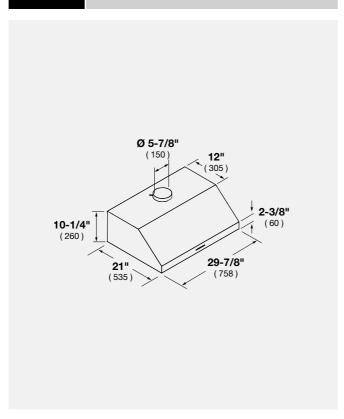


UNDERCABINET HOOD CODE ID F4UC30S1

30"

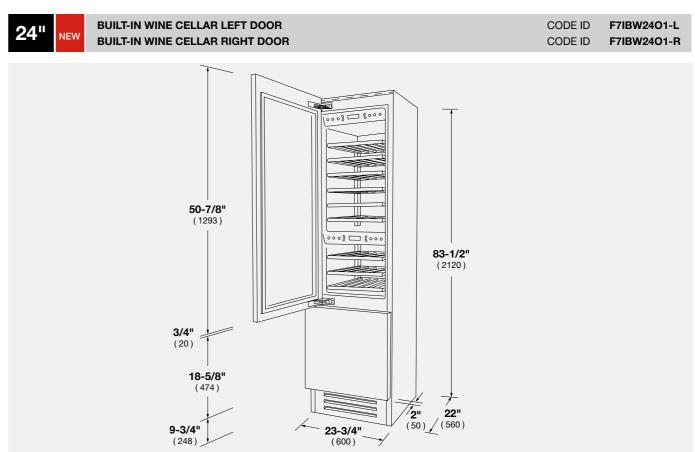

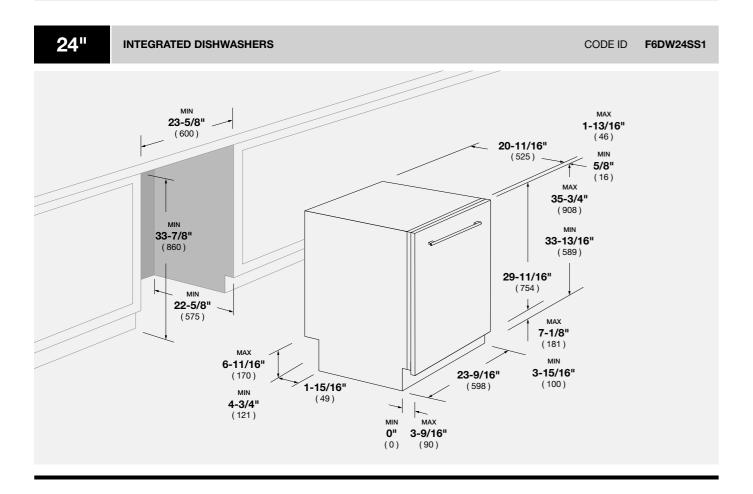

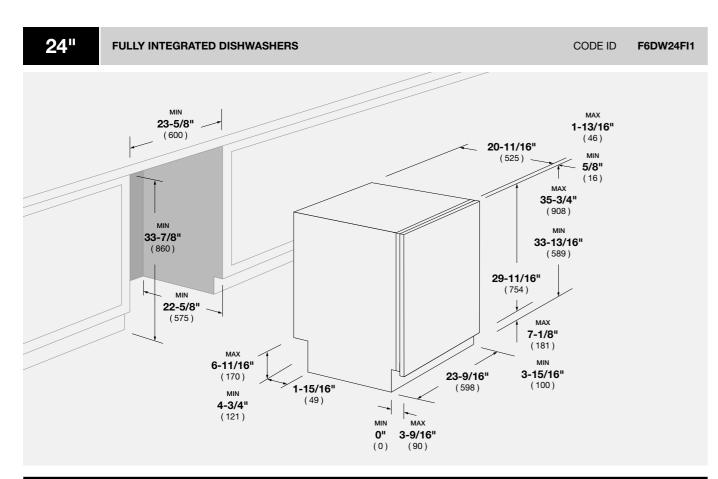

#### FULGOR MILANO

# TECHNICAL DATA

## PROFESSIONAL



CODE ID	48" DUAL FUEL PROFESSIONAL RANGE F6PDF486GS1			
Series		60	00	
Finish		Professional Desig	n - Stainless Steel	
CONTROL PANEL				
Control Type		11 Heavy [		
Oven Programming  Display: Clock - Temperature - Function		Electronic with	ELED	
Language			lish	
COOKTOP		Ling	jiiori	
Туре		GAS (N	G or LP)	
Cooking Surface			ck Enamel	
GAS COOKTOP FEATURES				
		tric Re-ignition system	Dual Crown Burners (Bras	
		ne-out sensing	,	flat or with rack)
		Mount Injectors Conversion Kit	Pre	ssure Regulator
Heavy Duty Cast Iron Grates	L.I.		3	
Cooking Zones		6 Burner		
Burners types		All Dual Flame/	Simmer Burner	
Front-L/Front-R - Power (Max/Min) G20 - 5"		20000 (BTU/h) - 5850V		
Front-L/Front-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W	
Rear-L/Front Center "Right"/Rear Center "Right"/		18000 (BTU/h) - 5300V	V / 750 (BTU/h) - 220W	
Rear-R - Power (Max/Min) G20 - 5"  Rear-R/Front Center "Right"/Rear Center "Right"/		. , ,	. ,	
Rear-R/Front Center "Right"/Rear Center "Right"/ Rear-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W	
Griddle Burner (Center "Left")			/DTI///\ 0000000000000000000000000000000000	TII/I\ 405011
Power (Max/Min) G20 - 5"/G31 - 10"	Thermostat Co	ntrol Griddle Burner - 12500	) (BTU/h) - 3600W / 4200 (E	31U/h) - 1250W
OVEN		ssory Oven)		in Oven)
Туре		onvection (True Euro Conv.)		,
Temperature Regulation	Electronic Control (min/m	ax 170/550°F - 75/290°C)	Electronic Control (min/m	ax 170/550°F - 75/290°C)
OVEN FUNCTIONS	D 11: 0 1( 0)		D 11: 0 1: 01	
	Pyrolytic Self-Clean with automatic door latch	Bake	Pyrolytic Self-Clean with automatic door latch	Bake
	Convection Broil	Broil	Convection Broil	Broil
	Pizza (Lower Convection)		Pizza (Lower Convection)	Oven Lights
ELECTRIC OVEN FEATURES			,	, , ,
	Preset/Last Used	Preheat Indicator		Preheat Indicator
	Temperature Memory	(25%, 50%, 75%, 100%)		(25%, 50%, 75%, 100%)
	Child Door Lock	Control Display Lock		Control Display Lock
	Automatic Fast Preheat	12/24 Hour Clock Formats	Sabbath Mode	12/24 Hour Clock Formats Temperature Display °C/°F
	Sabbath Mode	Temperature Display °C/°F	Meat Probe	Temperature Display O/ T
OVEN DOOR(S)				
Oven Glass Window		ssed Window	Deep Embos	ssed Window
Door Cooling System		stant Glasses		stant Glasses
Door Hinges - Soft-closing System		/ Steady Tilt		Steady Tilt
Handle Style	Stainless Steel Tube Ø	30mm, Metal End caps	Stainless Steel Tube Ø	30mm, Metal End caps
OVEN CAVITY Gross Capacity (cbft)	2	.7	1	.4
Usable Capacity (cbft)		.4		.1
Cavity Enamel Colour		ack		ack
Rack Positions		6		3
Oven Lights	1x20W	Halogen	3x20W	Halogen
HEATING ELEMENTS (@240V)	_			
Broil Upper Heating Element		100 W		500 W
Upper Auxiliary Element  Concealed Bake Lower Heating Element		00 W 750 W		032 W 000 W
Convection Element		300 W		300 W
OVEN ACCESSORIES	1 % 10	500 11	2 × 10	500 11
Chromed Racks	2 2			2
Enameled Broiler Pan (basin + anti splash)	- 1			1
Telescopic Chromed Rack	1 1			
DIMENSIONS/WEIGHT				
Overall dim - Width		47 - 3/4"		
Overall dim - Height (min - max) Overall dim - Depth		36 3/8", 38 1/4" (9 29 - 3/4"	23 mm) - (972 mm)	
Gross Weight				
POWER / RATINGS (208/240 V, 60 HZ)		259 108	(240 kg)	
kW / Amps rating at 120-240V, 60Hz		6.08 kW	- 26.7A	
kW / Amps rating at 120-208V, 60Hz			- 28.3A	
Power Cable		Nema	14-50P	
INSTRUCTIONS FOR USE Use & Care Manual / Installation Manual			nch / Spanish	

DUAL FUEL PROFESSIONAL RANGE





	OCH BUAL EUEL BBO	DEFECTIONAL PANOE	CON DUAL FUEL DE	DEECCIONAL DANCE
CODE ID		DFESSIONAL RANGE F366S1		DFESSIONAL RANGE F304S1
Series	600		60	00
Finish	Professional Design	gn - Stainless Steel	Professional Design - Stainless Steel	
CONTROL PANEL Control Type	8 Heavy D	Outy Knobs	6 Heavy D	Outy Knobs
Oven Programming	Electronic with	n 6 Touch Keys	Electronic with	n 6 Touch Keys
Display: Clock - Temperature - Function		e LED		e LED
Language COOKTOP	English / Fre	nch / Spanish	English / Frei	nch / Spanish
Туре	GAS (N	G or LP)	GAS (N	G or LP)
Cooking Surface	Matte Bla	ck Enamel	Matte Bla	ck Enamel
GAS COOKTOP FEATURES Electric Re-ignition system		•		•
Flame-out sensing		<u>·</u>		•
Top Mount Injectors		•		•
L.P. Conversion Kit		•		•
Dual Crown Brass Burner Heavy Duty Cast Iron Grates		• 3		• 2
Cooking Zones		6		4
Burners types		/Simmer Burner	All Dual Flame/	Simmer Burner
Power Front-L,Front-R (Max/Min) NG Power Front-R (Max/Min) NG	20000 (BTU/h) - 5900V	N / 750 (BTU/h) - 220W	20000 (PTLI/b) 5000V	- V / 750 (BTU/h) - 220W
Power (Max/Min) NG Power (Max/Min) NG	18000 (BTU/h) - 5300\	- N / 750 (BTU/h) - 220W		V / 750 (BTU/h) - 220W V / 750 (BTU/h) - 220W
Power (Max/Min) LP		N / 750 (BTU/h) - 220W		V / 750 (BTU/h) - 220W
OVEN				
Type Temperature Regulation		convection (True Euro Conv.) nax 170/550°F - 75/290°C)		onvection (True Euro Conv.) ax 170/550°F - 75/290°C)
OVEN FUNCTIONS	Electronic Control (IIIII)/II	iax 170/330 F - 73/290 C)	Electronic Control (millym	ax 170/550 F - 75/290 C)
	Pyrolytic Self-Clean	Dehydrate	Pyrolytic Self-Clean	Dehydrate
	True Convection	Thaw (Defrost)	True Convection	Thaw (Defrost)
	Convection Broil Convection Roast	Proof (Warm) Keep warm (Warm Plus)	Convection Broil Convection Roast	Proof (Warm)  Keep warm (Warm Plus)
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Lights
	Bake	Broil	Bake	Broil
ELECTRIC OVEN FEATURES	D 1/1 111 1	D	B 1/1 111 1	D 1 11 11 1
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)
	Child Door Lock	Control Display Lock	Child Door Lock	Control Display Lock
	Fast Preheat	12/24 Hour Clock Formats	Fast Preheat	12/24 Hour Clock Formats
	Sabbath Mode	Temperature Display °C/°F	Sabbath Mode	Temperature Display °C/°F
OVEN DOOR(S)	Meat Probe		Meat Probe	
Oven Glass Window	Deep Embossed I	Extra Wide Window	Deep Embossed E	Extra Wide Window
Door Cooling System		stant Glasses	4 Heat Resistant Glasses	
Door Hinges - Soft-closing System	Heavy Duty	/ Steady Tilt with Metal End caps	Heavy Duty Steady Tilt Stainless Steel Tube with Metal End caps	
Handle Style OVEN CAVITY	Stainless Steel Tube	with Metal End caps	Stainless Steel Tube	with Metal End caps
Gross Capacity (cbft)	5	.7	4	.4
Usable Capacity (cbft)		.9	4.1	
Cavity Enamel Colour Rack Positions		ack 6		ack
Oven Lights		Halogen	6 3x20W Halogen	
HEATING ELEMENTS (@240V)				
Broil Upper Heating Element		500 W		500 W
Upper Auxiliary Element Concealed Bake Lower Heating Element		032 W 000 W	1032 W 3000 W	
Convection Element		300 W		300 W
OVEN ACCESSORIES				
Chromed Racks		2		2
Enameled Broiler Pan (basin + anti splash) Telescopic Chromed Rack	1 1			<u>1</u> 1
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 3/4"	(910 mm)	29 - 3/4"	(758 mm)
Overall dim - Height (min - max)	36 3/8", 38 1/4"	(923 mm) - (972 mm)	36 3/8", 38 1/4"	(923 mm) - (972 mm)
Overall dim - Depth Gross Weight	29 - 3/4" 382 lbs	(756 mm) (174 kg)	29 - 3/4" 326 lbs	(756 mm) (148 kg)
POWER / RATINGS (208/240 V, 60 HZ)	00L 103	(177 19)	020 103	1 (170 Ng)
kW / Amps rating at 120-240V, 60Hz		/ - 16.9A		- 16.9A
kW / Amps rating at 120-208V, 60Hz		/ - 17.5A		- 17.5A
Power Cable INSTRUCTIONS FOR USE	Nema	14-50P	Nema	14-50P
Use & Care Manual / Installation Manual	Fnalish / Fra	nch / Spanish	Fnalish / Fra	nch / Spanish
Jos a Jaio Manual / Mistallation Manual	English / French / Spanish		English / French / Spanish	

DATA

ALL GAS PROFESSIONAL RANGE





CODE ID	36" ALL GAS PROFESSIONAL RANGE F6PGR366S2		30" ALL GAS PROFESSIONAL RANGE F6PGR304S2	
Series	6	600	600	
Finish	Professional Desi	gn - Stainless Steel	Professional Design - Stainless Steel	
CONTROL PANEL			_	
Control Type		Outy Knobs		uty Knobs
Display: Temperature - Function		e LED		ELED
Ignition/Temperature control COOKTOP	Electronic Control (	(min/max 170/550°F)	Electronic Control (I	min/max 170/550°F)
Type	GAS (N	IG or LP)	GAS (N	G or LP)
Cooking Surface	,	ack Enamel	· ·	ck Enamel
GAS COOKTOP FEATURES	matto Die	ion Ename.	ario Dia	on Ename.
Electric Re-ignition system		•		•
Flame-out sensing		•		
Top Mount Injectors		•		•
L.P. Conversion Kit		•		
Dual Crown Brass Burner		3		2
Heavy Duty Cast Iron Grates Cooking Zones		6		1
Burners types		/Simmer Burner		Simmer Burner
Power Front-L,Front-R (Max/Min) NG		W / 750 (BTU/h) - 220W	7 th Baar Flamo,	-
Power Front-R (Max/Min) NG		-	20000 (BTU/h) - 5900V	V / 750 (BTU/h) - 220W
Power (Max/Min) NG		W / 750 (BTU/h) - 220W		V / 750 (BTU/h) - 220W
Power (Max/Min) LP	15000 (BTU/h) - 4400°	W / 750 (BTU/h) - 220W	15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W
OVEN				
Туре		Convection		Convection
Temperature Regulation	Electronic the	rmostat control	Electronic ther	mostat control
OVEN FUNCTIONS	D	alca	De	lea .
	Bake Broil		Bake Broil	
		zza	Pizza	
GAS OVEN FEATURES				
	Electronic F	Flame Ignition	Electronic F	ame Ignition
	Flame-out Sensing		Flame-ou	t Sensing
	Flame-out Auto-off			t Auto-off
	Sabbath Mode			h Mode
0)/5) 0000/0)	L.P. Conversion Kit		L.P. Conv	ersion Kit
OVEN DOOR(S) Oven Glass Window	Doop Embosood	Extra Wide Window	Doop Embassed F	Extra Wide Window
Door Cooling System		stant Glasses		tant Glasses
Door Hinges - Soft-closing System		y Steady Tilt		Steady Tilt
Handle Style		with Metal End caps	Stainless Steel Tube with Metal End caps	
OVEN CAVITY		·		·
Gross Capacity (cbft)		5.7		.4
Usable Capacity (cbft)		1.4	3.6	
Cavity Enamel Colour		ack	Black	
Rack Positions		6		3
Oven Lights NOVA BROILER SYSTEM BURNER	3X20W	Halogen	3x20W Halogen	
Power (Max) NG	18000 (BTI	J/h) - 5300W	14000 (BTU/h) - 4102W	
Power (Max) LP	,	J/h) - 5000W	,	/h) - 3800W
BAKE BURNER		5,,		,, 555511
Power (Max) NG	21500 (BTI	J/h) - 6300W	18000 (BTU	/h) - 5300W
Power (Max) LP	21500 (BTU/h) - 6300W		16000 (BTU	/h) - 4700W
OVEN ACCESSORIES				
Chromed Racks		2		2
Enameled Broiler Pan (basin + anti splash)			1 1	
Telescopic Chromed Rack DIMENSIONS/WEIGHT		1		l
Overall dim - Width	35 - 3/4"	(910 mm)	29 - 3/4"	(758 mm)
Overall dim - Height (min - max)	36 3/8", 38 1/4"	(923 mm) - (972 mm)	36 3/8", 38 1/4"	(923 mm) - (972 mm)
Overall dim - Depth	29 - 3/4"	(756 mm)	29 - 3/4"	(756 mm)
Gross Weight	377 lbs	(171 kg)	322 lbs	(146 kg)
POWER / RATINGS (120 V, 60 HZ)		, , ,		
Watts / Amps	200W	/ - 1.7A	200W	- 1.7A
Power Cable	Nema	a 5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	

#### SOFIA

INDUCTION PROFESSIONAL RANGE





			1.3	-
CODE ID		OFESSIONAL RANGE 1365S1		DFESSIONAL RANGE 1304S1
Series	600		600	
Finish CONTROL PANEL	Professional Design	gn - Stainless Steel	Professional Design	gn - Stainless Steel
Control Type	8 Heavy [	Outy Knobs	6 Heavy D	Outy Knobs
Oven Programming		n 6 Touch Keys		n 6 Touch Keys
Display: Clock - Temperature - Function		e LED		e LED
Language	Eng	glish	English / Fre	nch / Spanish
COOKTOP Type	INDLI	CTION	INDIT	CTION
Cooking Surface		ic Glass		ic Glass
INDUCTION COOKTOP FEATURES				
	Pot Detection System  Melting Function  113°F / 45°C	Residual Heat Indication Simmering Function 158°F / 70°C (	Pot Detection System Melting Function 113°F / 45°C	Residual Heat Indication Simmering Function 158°F / 70°C
	Digital Display for Power Level	Booster/Fast Boil Function for Each Zone	Digital Display for Power Level	Booster/Fast Boil Function for Each Zone
	Failure Codes Indication	Power Levels: 1 to 9	Failure Codes Indication	Power Levels: 1 to 9
	Cooling Fan System	Heat up time automatic	Cooling Fan System	Heat up time automatic
	Child Lock Function	Digital minute minder	Child Lock Function	Cooking Zones: 4
D	Knob for power setting	Cooking Zones: 5	Knob for power setting	(000) 0000/4; (0700:::
Burners types (Front-L) - Power (Max/Booster) Burners types (Rear-L) - Power (Max/Booster)	Inductor 9" Inductor 7 - 3/4"	(230 mm) 2300W / 3700W (200 mm) 1850W / 3000W	Inductor 9" Inductor 6 - 1/2"	(230 mm) 2300W / 3700W (165 mm) 1400W / 2200W
Burners types (Rear-L) - Power (Max/Booster)  Burners types (Center dual circuit) - Power (Max/Booster)		(280 mm) 3000W / 5500W	muuctoi 0 - 1/2	-
Burners types (Center dual circuit) - Power (Max/Booster)		(200 mm) 1850W / 2600W		-
Burners types (Front-R) - Power (Max/Booster)	Inductor 9"	(230 mm) 2300W / 3700W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W
Burners types (Rear-R) - Power (Max/Booster)	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W
OVEN	Floatria Calf alaan Dual C	Convection (True Fure Conv.)	Floatric Solf cloop Dual C	Convection (True Fure Conv.)
Type Temperature Regulation		convection (True Euro Conv.) nax 170/550°F - 75/290°C)		Convection (True Euro Conv.) lax 170/550°F - 75/290°C)
OVEN FUNCTIONS	Electronic Control (min/ii	10x 170/000 1 70/200 0)	Liconomic Control (minum	lax 170/000 1 70/200 0)
	Pyrolytic Self-Clean	Broil	Pyrolytic Self-Clean	Broil
	True Convection	Dehydrate	True Convection	Dehydrate
	Convection Broil	Thaw (Defrost)	Convection Broil	Thaw (Defrost)
	Convection Roast Pizza (Lower Convection)	Proof (Warm) Keep warm (Warm Plus)	Convection Roast Pizza (Lower Convection)	Proof (Warm)  Keep warm (Warm Plus)
	Bake	Oven Lights	Bake	Oven Lights
ELECTRIC OVEN FEATURES				
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicator
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100%)
	Child Door Lock Automatic Fast Preheat	Control Display Lock 12/24 Hour Clock Formats	Child Door Lock Fast Preheat	Control Display Lock 12/24 Hour Clock Formats
	Sabbath Mode	Temperature Display °C/°F	Sabbath Mode	Temperature Display °C/°F
	Meat Probe		Meat Probe	
OVEN DOOR(S)				
Oven Glass Window		ssed Window		Extra Wide Window
Door Cooling System  Door Hinges - Soft-closing System		stant Glasses / Steady Tilt		stant Glasses / Steady Tilt
Handle Style		e Ø30mm, Pro Style		with Metal End caps
OVEN CAVITY	2.2			
Gross Capacity (cbft)		.7		.4
Usable Capacity (cbft)		.9		.1
Cavity Enamel Colour Rack Positions		ack 6		ack 6
Oven Lights		b Halogen		b Halogen
HEATING ELEMENTS (@240V)	O/LOTT	- Idio goii	5/12011	· ia.ogoii
Broil Upper Heating Element		500 W		500 W
Upper Auxiliary Element		032 W		032 W
Concealed Bake Lower Heating Element Convection Element		000 W		000 W
OVEN ACCESSORIES	2 X I	300 W	2 X I.	300 W
OVER MODE SOSTILES	2 Chromed Racks	1 Telescopic Chromed Rack	2 Chromed Racks	1 Telescopic Chromed Rack
	1 Enameled Broiler Pan		1 Enameled Broiler Pan	
	(basin + anti splash)		(basin + anti splash)	
DIMENSIONS/WEIGHT	25 2/4"	(010 mm)	20 2/4	(750 mm)
Overall dim - Width Overall dim - Height (min - max)	35 - 3/4" 36 3/8", 38 1/4"	(910 mm) (923 mm) - (972 mm)	29 - 3/4" 36 3/8", 38 1/4"	(758 mm) (923 mm) - (972 mm)
Overall dim - Depth	29 - 3/4"	(756 mm)	29 - 3/4"	(756 mm)
Gross Weight	382 lbs	(174 kg)	311 lbs	(141 kg)
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 120-240V, 60Hz		Maximum Output Amp.)		- 45.8A
kW / Amps rating at 120-208V, 60Hz Power Cable		Maximum Output Amp.) 14-50P		- 48.5A 14-50P
INSTRUCTIONS FOR USE	inema	I <del>T</del> -JUF	ivema	1 <del>-1</del> -30F
Use & Care Manual / Installation Manual	Enalish / Fre	nch / Spanish	English / Fre	nch / Spanish
a data mandar / motanation mandar	Linguistr/ Tre	,	2.19113117116	, opanion

PROFESSIONAL OVEN





CODE ID	30" PROFESSIONAL SINGLE OVEN F6PSP30S1			AL DOUBLE OVEN P30S1
Series	6	600	600	
Finish	Professional Desi	gn - Stainless Steel	Professional Desi	gn - Stainless Steel
CONTROL PANEL	Trotocolorial Book	gri Ctarricco Ctoci	1 Totessional Design - Stainless Steel	
Control Type	2 Heavy I	Duty Knobs	2 Heavy Duty Knobs	
Oven Programming		h 6 Touch Keys		n 6 Touch Keys
Display: Clock - Temperature - Timer		te LED		e LED
Language	En	glish	End	glish
OVEN				
Туре	Dual True	Convection	Dual True	Convection
Temperature Regulation	Electronic Control (min/n	nax 170/550°F - 75/290°C)	Electronic Control (min/m	nax 170/550°F - 75/290°C)
OVEN FUNCTIONS				
	Pyrolytic Self-Clean	Broil	Pyrolytic Self-Clean	Broil
	True Convection	Dehydrate	True Convection	Dehydrate
	Convection Bake	Thaw (Defrost)	Convection Bake	Thaw (Defrost)
	Convection Broil	Proof (Warm)	Convection Broil	Proof (Warm)
	Convection Roast	Keep warm (Warm Plus)	Convection Roast	Keep warm (Warm Plus)
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Lights
ELECTRIC OVEN FEATURES	Bake		Bake	
ELECTRIC OVEN FEATURES	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicator
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100%)
	Control Display Lock	Sabbath Mode	Control Display Lock	Sabbath Mode
	Child Door Lock	Temperature Display °C/°F	Child Door Lock	Temperature Display °C/°F
OVEN DOOR(S)	Meat Probe		Meat Probe (Upper Oven Only	)
Oven Glass Window	Lorgo Coo T	hrough Glass	Larga Coa T	hrough Class
Door Cooling System		stant Glasses	Large See Through Glass 4 Heat Resistant Glasses	
Door Hinges - Soft-closing System		y Steady Tilt	Heavy Duty Steady Tilt	
Handle Style	,	ar Steel		ar Steel
OVEN CAVITY	Tubui	ui Otoci	Tubul	al Otoci
Gross Capacity (cbft)	4	1.4	Δ	.4
Usable Capacity (cbft)		4.1		.1
Cavity Enamel Colour		lack		ack
Rack Positions		6		6
Oven Lights	3x20W	Halogen	3x20W	Halogen
HEATING ELEMENTS (@240V)				
Broil Upper Heating Element	3	500 W	3	500 W
Upper Auxiliary Element	1	032 W	1032 W	
Concealed Bake Lower Heating Element	3	000 W	3000 W	
Convection Element	2 x 1	300 W	2 x 1300 W	
OVEN ACCESSORIES				
Chromed Racks		2	2 on bo	th ovens
Enameled Broiler Pan (basin + anti splash)		1	1 on both ovens	
Telescopic Chromed Rack DIMENSIONS/WEIGHT		1	1 on bo	th ovens
Overall dim - Width	29 - 11/16"	(754 mm)	29 - 11/16"	(754 mm)
Overall dim - Height	27 - 7/8"	(707 mm)	51"	(1295 mm)
Overall dim - Depth	24"	(610 mm)	24"	(610 mm)
Cut-out - Width	28 - 7/16"	(722 mm)	28 - 7/16"	(722 mm)
Cut-out - Height (min)	27 - 3/8"	(696 mm)	50"	(1270 mm)
Cut-out - Depth (min)	23 - 1/4"	(590 mm)	23 - 1/4"	(590 mm)
Gross Weight	198 lbs	(90 kg)	340 lbs	(154 kg)
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz		V - 16.9A		/ - 33.8A
kW / Amps rating at 208V, 60Hz		V - 17.5A		/ - 32.4A
Power Cable	Со	nduit	Coi	nduit
INSTRUCTIONS FOR USE	:=		:=	
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	



CODE ID		WARMING DRAWER D30S1		
Туре	Warming	g Drawer		
Front finish	Stainless Steel v	vith Pro - Handle		
Internal shelf	In	OX		
Compatible with ovens	F6PSP30S1	- F6PDP30S1		
PERFORMANCE				
Maximum temperature	194°F	/ 90°C		
Cooking at low temperature (slow cooking)		•		
Leavening		•		
Heating dishes and food		•		
Slow close assistance		•		
Open / Close push - pull system		-		
CONTROL				
Thermostat	86°F - 194°F	/ 30°C - 90°C		
Fan assisted		•		
Function Indicator / Thermostat on/off				
SAFETY				
Safety front				
ELECTRICAL SPECIFICATIONS				
Max power absorbed (W)	150			
Power (V-Hz)	120	0/60		
Power cord				
Plug				
CAPACITY				
Volume (cbft-litri)	2,1	61.4		
DIMENSIONS				
Overall dim - Width	29 7/8"	(758 mm)		
Overall dim - Height	10 3/8"	(264 mm)		
Overall dim - Depth	22 3/4"	(578 mm)		
Door Depth with Overlay	2 1/8"	(54 mm)		
Door Depth with Pro Handle	4 11/16"	(119 mm)		
Cut-out - Width	28 5/8"	(727 mm)		
Cut-out - Height	9 1/8" (235 mm)			
Cut-out - Depth	24" (610 mm)			
WEIGHT				
Net Weight	70 lbs	31.5 Kg		
Gross Weight	79 lbs	35.6 Kg		

PROFESSIONAL GAS RANGE TOP





#### SOFIA

PROFESSIONAL INDUCTION RANGE TOP



CODE ID		AL GAS RANGE TOP T366S1	30" PROFESSIONA F6GRT	
Series	6	00	60	00
Finish	Professional Design	gn - Stainless Steel	Professional Desig	n - Stainless Steel
CONTROL PANEL				
Control Type	6 Heavy Γ	Outy Knobs	4 Heavy D	uty Knobs
СООКТОР	·			
Туре	GAS (N	IG or LP)	GAS (No	G or LP)
Cooking Surface	Matte Bla	ack Enamel	Matte Blad	ck Enamel
GAS COOKTOP FEATURES				
Electric Re-ignition system		•		•
Flame-out sensing		•	•	•
Top Mount Injectors		•	•	•
Dual Crown Brass Burner		•	•	•
Simmer Plate	Opt	tional	Optional	
Wok Ring	Opt	tional	Optional	
Heavy Duty Cast Iron Grates		3	2	
Cooking Zones	6		4	1
Burners types	All Dual Flame	/Simmer Burner	All Dual Flame/Simmer Burner	
Power Front-L,Front-R (Max/Min) NG	20000 (BTU/h) - 5900\	W / 750 (BTU/h) - 220W	-	-
Power Front-R (Max/Min) NG		-	20000 (BTU/h) - 5900V	V / 750 (BTU/h) - 220W
Power (Max/Min) NG	18000 (BTU/h) - 5300\	W / 750 (BTU/h) - 220W	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W	
Power (Max/Min) LP	15000 (BTU/h) - 4400\	W / 750 (BTU/h) - 220W	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W	
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 3/4"	(910 mm)	29 - 3/4"	(758 mm)
Overall dim - Height	7"	(179 mm)	7"	(179 mm)
Overall dim - Depth	29 - 3/4"	(756 mm)	29 - 3/4"	(756 mm)
Cut-out - Width	36"	(914 mm)	30"	(762 mm)
Cut-out - Height (min)	7"	(179 mm)	7"	(179 mm)
Cut-out - Depth (min - max)	24", 25 - 1/2"	(610 mm) - (650 mm)	24", 25 - 1/2"	(610 mm) - (650 mm)
Gross Weight	121 lbs	(55 kg)	100 lbs	(45 kg)
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.	.1A	0.	1A
Power Cable	Nema	s 5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	rench / Spanish English / French / Spanish		nch / Spanish


CODE ID	30" PROFESSIONAL INDUCTION RANGE TOP				
	F6IRT304S1				
Series	600				
Finish	Professional Design - Ceramic and Stainle	ss Steel			
CONTROL PANEL					
Control Type	4 Heavy Duty Knobs				
COOKTOP	, ., .,				
Туре	INDUCTION				
Cooking Surface	Ceramic Glass				
INDUCTION COOKTOP FEATURES					
Pot Detection System	•				
Child Lock Function	•				
Failure Codes Indication	•				
Knob for Power Setting (illuminated)	•				
Power Levels	1 to 9				
Digital Display for Power Level	Optional				
Melting Function 113°F / 45°C	2				
Warming Function 158°F / 70°C	4				
Booster/Fast Boil Function for Each Zone	•				
Automatic Heat-up Time	•				
Residual Heat Indication	•				
Cooking Zones	4				
Burners types (Front-L) - Power (Max/Booster)	Inductor 9" (230 mm) 2	300W / 3700W			
Burners types (Rear-L) - Power (Max/Booster)	Inductor 6 - 1/2" (165 mm) 1	400W / 2200W			
Burners types (Front/Rear-R) Power (Max/Booster)	Inductor 7 - 3/4" (200 mm) 1	850W / 3000W			
DIMENSIONS/WEIGHT					
Overall dim - Width	29 - 3/4" (758 mm)				
Overall dim - Height	7" (179 mm)				
Overall dim - Depth	29 - 3/4" (756 mm)				
Cut-out - Width	30" (762 mm)				
Cut-out - Width  Cut-out - Height (min)	7" (179 mm)				
Cut-out - Height (min) Cut-out - Depth (min - max)	24", 25 - 3/8" (610 mm) - (64	4 mm)			
Gross Weight	100 lbs (45 kg)	T IIIIII			
POWER / RATINGS (120 V, 60 HZ)	100 lb3 (43 kg)				
kW / Amps rating at 240V, 60Hz	7.2 kW - 30A				
Power Cable	7.2 KW - 30A Conduit				
INSTRUCTIONS FOR USE	Conduit				
Use & Care Manual / Installation Manual	English / French / Spanish				

DATA



CODE ID	36" PROFESSIONAL PRO GAS COOK TOP F6PGK365S1			
Series	60	00		
Finish	Stainles	ss Steel		
CONTROL PANEL				
Control Type	Kno	obs		
COOKTOP				
Туре	GAS (NO	G or LP)		
Cooking Surface	Matte Blad	ck Enamel		
GAS COOKTOP FEATURES				
Electric Re-ignition system	•	•		
Flame-out sensing		•		
Dual Crown Brass Burner	•	•		
Simmer Plate	Opti	onal		
Small Pot Insert (for single burners only)	Opti	onal		
Wok Ring (for dual burner only)	Optional			
Heavy Duty Cast Iron Grates	3			
Cooking Zones	5			
Burners types	All Dual Flame/Simmer Burner			
Power (Max/Min) (Front-L)	18000 (BTU/h) - 5275W / 1300 (BTU/h) - 382W			
Power (Max/Min) (Rear-L)	18000 (BTU/h) - 5275W / 1300 (BTU/h) - 382W			
Power (Max/Min) (Front Center)	20000 (BTU/h) - 5880W / 1000 (BTU/h) - 294W			
Power (Max/Min) (Rear-R)	18000 (BTU/h) - 5275W			
Power (Max/Min) (Front-R)	18000 (BTU/h) - 5275W	/ 1300 (BTU/h) - 382W		
DIMENSIONS/WEIGHT				
Overall dim - Width	36"	(914 mm)		
Overall dim - Height	5 - 3/16"	(132 mm)		
Overall dim - Depth	21"	(533 mm)		
Cut-out - Width	35"	(889 mm)		
Cut-out - Height (min)	3 - 15/16"	(74 mm)		
Cut-out - Depth (min - max)	19 - 1/2"	(495 mm)		
Gross Weight	55 lbs (25 kg)			
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.1A			
Max Power	92000 (BTU/h) - 27000W			
Power Cable	Nema 5-15P			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish		

PROFESSIONAL PRO GAS COOK TOP



CODE ID	30" PROFESSIONAL I F6PGK		
Series	60	00	
Finish	Stainles	s Steel	
CONTROL PANEL			
Control Type	Kno	bs	
COOKTOP			
Type	GAS (NO	G or LP)	
Cooking Surface	Matte Blace	k Enamel	
GAS COOKTOP FEATURES			
Electric Re-ignition system	•		
Flame-out sensing	•		
Dual Crown Brass Burner	•		
Simmer Plate	Optio	onal	
Small Pot Insert (for single burners only)	Optio	onal	
Wok Ring (for dual burner only)	Optio	onal	
Heavy Duty Cast Iron Grates	2		
Cooking Zones	5	i	
Burners types	All Dual Flame/Simmer Burner		
Power (Max/Min) (Front-L)	18000 (BTU/h) - 5275W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Rear-L)	18000 (BTU/h) - 5275W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Center)	20000 (BTU/h) - 5880W / 1000 (BTU/h) - 294W		
Power (Max/Min) (Rear-R)	18000 (BTU/h) - 5275W	/ 1300 (BTU/h) - 382W	
Power (Max/Min) (Front-R)	18000 (BTU/h) - 5275W		
DIMENSIONS/WEIGHT	, ,	,	
Overall dim - Width	30"	(762 mm)	
Overall dim - Height	5 - 3/16"	(132 mm)	
Overall dim - Depth	21"	(533 mm)	
Cut-out - Width	29"	(737 mm)	
Cut-out - Height (min)	3 - 15/16"	(74 mm)	
Cut-out - Depth (min - max)	19 - 1/2"	(495 mm)	
Gross Weight	45 lbs	(20 kg)	
POWER / RATINGS (120 V, 60 HZ)		·	
Amps	0.1	Α	
Max Power	92000 (BTU/h) - 27000W		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Fren	ch / Spanish	

PROFESSIONAL HOOD





CODE ID		SIONAL HOOD 148DS1		SIONAL HOOD 36DS1	
Series	6	600	6	00	
Finish	Professional Design - S	Stainless Steel (AISI 430)	Professional Design - S	Stainless Steel (AISI 430)	
CONTROL PANEL					
Control Type	4 speed med	hanical control	4 speed mec	hanical control	
PERFORMANCES					
Output (CFM)	10	000	10	000	
Sound Level (dB)		75		75	
Motor	Twin	Motor	Twin Motor		
Venting Type	Ducted and	I recirculating	Ducted and recirculating		
FEATURES					
Filter Style	Pro	Baffle	Pro	Pro Baffle	
Lighting	6 x 1.2	2W LED	4 x 1.2W LED		
Single duct diameter	7 - 7/8"	(200 mm)	7 - 7/8"	(200 mm)	
DIMENSIONS/WEIGHT					
Overall dim - Width	47 - 7/8"	(1216 mm)	35 - 7/8"	(910 mm)	
Overall dim - Height	18"	(460 mm)	18"	(460 mm)	
Overall dim - Depth	24"	(610 mm)	24"	(610 mm)	
Gross Weight	90 lbs	(41 kg)	70 lbs	(30 kg)	
POWER / RATINGS (115 V, 60 HZ)					
Watts / Amps	860W - 7.8A		860W - 7.8A		
Power Cable	Nema 5-15P		Nema	a 5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish	

#### SOFIA

PROFESSIONAL HOOD





CODE ID		SIONAL HOOD 136S1	30" PROFESS F6PH30S1 -	IONAL HOOD - F6PH30S2	
Series	6	00	60	00	
Finish	Professional Design - S	Stainless Steel (AISI 430)	Professional Design - S	tainless Steel (AISI 430)	
CONTROL PANEL					
Control Type	4 speed mec	nanical control	4 speed mech Knob Contro		
PERFORMANCES					
Output (CFM)	6	00	60	00	
Sound Level (dB)		72	7		
Motor		ne	One		
Venting Type	Ducted and	recirculating	Ducted and recirculating		
FEATURES					
Filter Style	Pro	Baffle	Pro Baffle		
Lighting	2 x 1.2W LED		2 x 1.2W LED 4 x 1.2W LED (F6PH30S2)		
Duct diameter	5 - 15/16" (150 mm)		5 - 15/16"	(150 mm)	
DIMENSIONS/WEIGHT					
Overall dim - Width	35 - 7/8"	(910 mm)	29 - 13/16"	(760 mm)	
Overall dim - Height	18"	(460 mm)	18"	(460 mm)	
Overall dim - Depth	24"	(610 mm)	24"	(610 mm)	
Gross Weight	70 lbs	(30 kg)	61 lbs	(28 kg)	
POWER / RATINGS (115 V, 60 HZ)					
Watts / Amps	430W - 3.8A		430W - 3.8A		
Power Cable	Nema 5-15P		Nema	Nema 5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Frer	nch / Spanish	

#### SOFIA

PROFESSIONAL INSERT HOOD





CODE ID	48" PROFESSIONA F6BP4		36" PROFESSIONAL INSERT HOOD F6BP34DS1		
Series	600	0	600	600	
Finish	Stainless Stee	el (AISI 430)	Stainless Stee	el (AISI 430)	
CONTROL PANEL		,			
Control Type	4+4 speed mech	nanical control	4+4 speed mech	nanical control	
PERFORMANCES	•		,		
Output (CFM)	100	0	100	0	
Sound Level (dB)	75	i	75		
Motor	Twin M	lotor	Twin M	lotor	
Venting Type	Ducted and re	ecirculating	Ducted and recirculating		
FEATURES					
Filter Style	Pro Baffle		Pro Ba	Pro Baffle	
Lighting	6 x 1.2V	V LED	4 x 1.2V	4 x 1.2W LED	
Duct diameter for each motor	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)	
DIMENSIONS/WEIGHT					
Overall dim - Width	45 - 3/4"	(116 mm)	34 - 1/4"	(87 mm)	
Overall dim - Height	13 - 1/8"	(33 mm)	13 - 1/8"	(33 mm)	
Overall dim - Depth	18 - 1/2"	(47 mm)	18 - 1/2"	(47 mm)	
Cut-out (w x d)	43 - 7/16" x 16 - 1/2"	(1092 x 419 mm)	32 - 1/16" x 16 - 1/2"	(814 x 419 mm)	
Gross Weight	68 lbs	(31 kg)	60 lbs	(27 kg)	
Net Weight	57 lbs	(26 kg)	51 lbs	(23 kg)	
POWER / RATINGS (115 V, 60 HZ)		· •			
Watts / Amps	860W - 7.8A		860W - 7.8A		
Power Cable	Nema 5-15P		Nema 5	5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Frend	ch / Spanish	English / Frend	ch / Spanish	

PROFESSIONAL FRIDGE BUILT-IN FRIDGE





CODE ID	F7PBM36S1-L	IONAL FRIDGE _ (LEFT DOOR) (RIGHT DOOR)	36" BUILT-IN FRIDGE F7IBM3601-L (LEFT DOOR) F7IBM3601-R (RIGHT DOOR)		
Series	7	00	7	700	
Finish	Professional Design	gn - Stainless Steel	Distinto - C	Overlay Panel	
PERFORMANCES/CAPACITY				•	
Anual Energy Usage	\$69 (57	71 kWh)	\$70 (5	80 kWh)	
Noise Level db		10		40	
Fridge compartment capacity (cbft)	14	4.7	1	4.7	
Flexzone Bottom-Drawer capacity (cbft)	3	3.8	3	3.8	
FEATURES					
Fridge Compartment					
Glass Shelves		2		2	
Adjustable Door Shelves		3		3	
Micro shot-peened Stainless Steel Drawers	2 Low	/ Temp	2 Lov	v Temp	
Flexzone Bottom-Drawer					
White Painted Drawers	1			1	
Internal Drawers	1 + 1 ice tray		1+1	ice tray	
LED lighting		•		•	
Ice Maker	•			•	
Equipment					
No Frost		•		•	
Flexzone		•		•	
TruPivot hinges		•		•	
DIMENSIONS/WEIGHT					
Width in	35 - 3/8"	(900 mm)	35 - 3/8"	(900 mm)	
Height in	83 - 1/2"	(2121 mm)	83 - 1/2"	(2121 mm)	
Depth without handle in	25"	(935 mm)	24"	(610 mm)	
Minimum niche height in	84"	(2134 mm)	84"	(2134 mm)	
Door clearance in	57 - 7/8"	(1470 mm)	57 - 7/8"	(1470 mm)	
Door opening angle	105°		1	05°	
Net Weight	540 lbs (245 kg)		474 lbs	(215 kg)	
POWER / RATINGS (115 V, 60 HZ)					
Watts / Amps	552W - 4.8A		552W	/ - 4.8A	
Power Cable	Nema 5-15P		Nema	Nema 5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	ench / Spanish	
	English / Fre	nch / Spanish	English / Fre	English / French / Spanish	

#### **SOFIA**

PROFESSIONAL WINE CELLAR BUILT-IN WINE CELLAR





CODE ID	24" PROFESSIONAL WINE CELLAR F7PBW24S1-L (LEFT DOOR) F7PBW24S1-R (RIGHT DOOR)		F7IBW24O1-	WINE CELLAR L (LEFT DOOR) R (RIGHT DOOR)	
Series	700		-	700	
Finish	Professional Desi	gn - Stainless Steel	Distinto - 0	Overlay Panel	
PERFORMANCES/CAPACITY		<u> </u>		•	
Noise Level db		41		41	
Riserva Compartment capacity (bottles)	;	36		36	
Wine Cellar Compartment capacity (bottles)		18		18	
Flexzone Bottom-Drawer capacity (cbft)		2		2	
FEATURES					
Riserva storage compartment					
Natural wood shelves		6		6	
Wine Cellar Compartment					
Natural wood shelves		3		3	
Flexzone Bottom-Drawer					
White Painted Drawers	1			1	
Internal Drawers		1	1		
LED lighting		•		•	
Glass door		•		•	
Equipment					
TriplePlay Refrigeration		•		•	
No Frost		•		•	
Flexzone		•		•	
TruPivot hinges		•		•	
DIMENSIONS/WEIGHT					
Width in	23 - 5/8"	(600 mm)	23 - 5/8"	(600 mm)	
Height in	83 - 1/2"	(2121 mm)	83 - 1/2"	(2121 mm)	
Depth without handle in	25"	(635 mm)	24"	(610 mm)	
Minimum niche height in	84"	(2134 mm)	84"	(2134 mm)	
Door clearance in	46"	(1168 mm)	46"	(1168 mm)	
Door opening angle	1	05°	1	05°	
Net Weight	463 lbs	(210 kg)	386 lbs	(175 kg)	
POWER / RATINGS (115 V, 60 HZ)				-	
Watts / Amps	472W - 4.1A		472V	V - 4.1A	
Power Cable	Nema 5-15P		Nem	Nema 5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	ench / Spanish	



CODE ID	24" INTEGRATED DISHWASHER F6PDW24SS1				
Series	600				
Finish		el - Interior tub			
PERFORMANCES	Stalliless stee	er - Interior tub			
Place Settings	1	3			
Energy Consumption (kWh / year)		<u> </u>			
Water Consuption (liters / year)		660			
Sound level (dB)		50			
HIDDEN CONTROLS					
Program Selector	Grev Pus	h Buttons			
On / Off button	,	•			
Number of Buttons		4			
Program Gauge	R	ed			
Temperature	38° - 45° - 5	5° - 65° - 70°			
Delay Timer		1 digit 9h			
Rinse Aid Level Indicator		ght			
Acoustic Signal at End		•			
PROGRAMMES					
Wash programs	1	0			
	Rapid 27'	Normal (Energy Star)			
Program	Crystal	Extreme wash (Sanitization)			
Trogram	Daily half load	Extreme wash (Samazadon)			
	Rinse	Eco quick			
Fast cycles	Light quick	Strong and fast			
r ast cycles	Normal quick	Ottorig and last			
ETL Sanitization listed	·	•			
FEATURES					
Tub Material	Stainle	ss Steel			
Internal Door	Stainless Steel Stainless Steel				
Lower Spray Arm		•			
Top Spray Arm		<u>-</u>			
Aquastop	Full				
Keating Element	Concealed heating element				
Turbidness Sensor	Contractica na	•			
Hinges	Fixed Fulcrum	- Not Adjustable			
Rear Foot Adjustment		• Not Najustable			
Single Load	4.0 - Press	sure switch			
Length of Inlet Hose (mm)		72			
Length of Drain Hose (mm)		70			
Water Hardness Max		; 58°dH			
BASKETS	100 111	, 00 011			
Baskets Color	G	rey			
Lower Basket		•			
Upper Basket		<u> </u>			
Upper Basket Adjustment		ic 3 levels			
Cutlery Basket		ettings			
DIMENSIONS/WEIGHT	13 56	go			
Overall dim - Width	23 - 9/16"	(598 mm)			
Overall dim - Height (min - max)	33 - 13/16", 35 - 3/4"	(860 mm) - (910 mm)			
Overall dim - Depth	23 - 3/16"	(589 mm)			
Cut-out - Width	23 - 5/10	(600 mm)			
Cut-out - Width Cut-out - Height (min)	33 - 7/8"	(860 mm)			
Cut-out - Depth (min - max)	22 - 5/8"	(575 mm)			
Gross Weight					
POWER / RATINGS (115 V, 60 HZ)	101 lbs	(46 kg)			
, , ,	4.4.1.4.1.4.1.4.1.4.1.4.1.4.1.4.1.4.1.4	/ 131			
kW / Amps rating Power Cable	1.4 kW - 13A				
INSTRUCTIONS FOR USE	Nema 5-15P				
	F= 21.75	ash / Casaish			
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish			

#### **FULGOR** MILANO

# TECHNICAL

## DISTINTO

TOUCH CONTROL OVEN







#### DISTINTO

TOUCH CONTROL OVEN







CODE ID	30" TOUCH CONTROL SINGLE OVEN F7SP30				
Series	700				
Finish	S1 - Stainless SteelB1 - Black GlassW1 - White Glass				
CONTROL PANEL	0 11 51 1				
Control Type  Display: Clock - Temperature - Function		onic Touch Control  [ 3.5"			
Language		rench / Spanish / Italian / German			
3 - 13 -	Control Interface Chime Volume Setting				
	Full Touch: Functions -	Date Format			
	Recipes - Settings Menu Brightness Setting	Demo Mode			
OVEN	2. ig. iii issa settii ig	Dome mode			
Туре		Convection			
Temperature Regulation	Electronic Control (min/m	nax 170/550°F - 75/290°C)			
OVEN FUNCTIONS	Durchatio Calf Class	Dunil			
	Pyrolytic Self-Clean True Convection	Broil Dehydrate			
	Convection Broil	Thaw (Defrost)			
	Convection Roast	Proof (Warm)			
	Pizza (Lower Convection)	Keep warm (Warm Plus)			
	Bake	Oven Lights			
ELECTRIC OVEN FEATURES	Preset default temperature	Display instantaneous temperature			
	Child Door Lock	Display instantaneous temperature  Control Display Lock			
	Sabbath Mode	12/24 Hour Clock Formats			
	Automatic Fast Preheat	Temperature Display °C/°F			
	Meat Probe	Event Logs (for Service)			
OVEN DOOR(S)	Laura Can T	Through Class			
Oven Glass Window Door Cooling System	Large See Through Glass 4 Heat Resistant Glasses				
Door Hinges	Heavy Duty Steady Tilt				
OVEN CAVITY	,	,			
Gross Capacity (cbft)		4.4			
Usable Capacity (cbft)		4.1			
Cavity Enamel Colour Rack Positions		lack 6			
Oven Lights		Halogen			
HEATING ELEMENTS (@240V)					
Broil Upper Heating Element		500 W			
Upper Auxiliary Element		032 W			
Concealed Bake Lower Heating Element Convection Element		300 W			
OVEN ACCESSORIES	2 % 1	300 W			
Chromed Racks		2			
Enameled Broiler Pan (basin + anti splash)		1			
Telescopic Chromed Rack		1			
Overall dim - Width	29 - 11/16"	(754 mm)			
Overall dim - Width Overall dim - Height	29 - 11/16"	(754 mm) (707 mm)			
Overall dim - Depth	24"	(610 mm)			
Cut-out - Width	28 - 7/16"	(722 mm)			
Cut-out - Height (min)	27 - 3/8"	(695 mm)			
Cut-out - Depth (min)	23 - 1/4"	(590 mm)			
Gross Weight POWER / RATINGS (208/240 V, 60 HZ)	183 lbs	(83 kg)			
kW / Amps rating at 120-240V, 60Hz	3.70kW	V - 15.4A			
kW / Amps rating at 120-208V, 60Hz		V - 16.8A			
Power Cable	Col	nduit			
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish			

CODE ID	30" TOUCH CONTROL DOUBLE OVEN F7DP30					
Series	700					
Finish	S1 - Stainless Steel B1 - Black Glass W1 - White Glass					
CONTROL PANEL						
Control Type		nic Touch Control				
Display: Clock - Temperature - Function		3.5"				
Language	Control Interface	ench / Spanish / Italian / German Chime Volume Setting				
	Full Touch: Functions -					
	Recipes - Settings Menu	Date Format				
	Brightness Setting	Demo Mode				
OVEN						
Туре		Convection				
Temperature Regulation	Electronic Control (min/m	ax 170/550°F - 75/290°C)				
OVEN FUNCTIONS	Puralytic Solf Clean	Broil				
	Pyrolytic Self-Clean True Convection	Dehydrate				
	Convection Broil	Thaw (Defrost)				
	Convection Roast	Proof (Warm)				
	Pizza (Lower Convection)	Keep warm (Warm Plus)				
	Bake	Oven Lights				
ELECTRIC OVEN FEATURES		<u> </u>				
	Preset default temperature	Display instantaneous temperature				
	Child Door Lock	Control Display Lock				
	Sabbath Mode	12/24 Hour Clock Formats				
	Automatic Fast Preheat	Temperature Display °C/°F				
OVEN BOOR(O)	Meat Probe (Upper Oven Only)	Event Logs (for Service)				
OVEN DOOR(S) Oven Glass Window	Lorgo Coo Ti	orough Class				
Door Cooling System	Large See Through Glass 4 Heat Resistant Glasses					
Door Hinges		Steady Tilt				
OVEN CAVITY	Ticavy Duty	Oteday Till				
Gross Capacity (cbft)	4	.4				
Usable Capacity (cbft)	4	.1				
Cavity Enamel Colour	Bla	ack				
Rack Positions		3				
Oven Lights	3x20W	Halogen				
HEATING ELEMENTS (@240V)						
Broil Upper Heating Element		500 W 032 W				
Upper Auxiliary Element  Concealed Bake Lower Heating Element		000 W				
Convection Element		800 W				
OVEN ACCESSORIES	ZXI					
Chromed Racks	2	2				
Enameled Broiler Pan (basin + anti splash)		1				
Telescopic Chromed Rack	-	1				
DIMENSIONS/WEIGHT						
Overall dim - Width	29 - 11/16"	(754 mm)				
Overall dim - Height	50 - 13/16"	(1290 mm)				
Overall dim - Depth	24"	(610 mm)				
Cut-out - Width Cut-out - Height (min)	28 - 7/16" 50"	(722 mm) (1270 mm)				
Cut-out - Height (min) Cut-out - Depth (min)	23 - 1/4"					
Gross Weight	23 - 1/4" (590 mm) 326 lbs (148 kg)					
POWER / RATINGS (208/240 V, 60 HZ)	525 105	\·· \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\				
kW / Amps rating at 120-240V, 60Hz	7.50kW	- 31.2A				
kW / Amps rating at 120-208V, 60Hz		- 30.3A				
Power Cable	Con	duit				
INSTRUCTIONS FOR USE						
Use & Care Manual / Installation Manual	English / Fren	nch / Spanish				

DATA

OVEN 400



CODE ID	30" OVEN 400 F4SP30S1				
Series	400				
Finish	Stainles	s Steel			
CONTROL PANEL					
Control Type	Electi	ronic			
Display: Clock - Temperature - Timer	Red				
Language	Eng	lish			
OVEN					
Туре	True Cor	vection			
Temperature Regulation	Electronic Control (min/m	ax 120/485°F - 50/250°C)			
OVEN FUNCTIONS					
	Pyrolytic Self-Clean	Bake			
	True Convection	Broil			
	Convection Bake	Thaw (Defrost)			
	Convection Broil	Oven Lights			
	Convection Roast				
ELECTRIC OVEN FEATURES					
	Temperature I	Display °C/°F			
OVEN DOOR(S)					
Oven Glass Window	Large See Tr				
Door Cooling System	4 Heat Resistant Glasses				
Door Hinges	Heavy Duty Steady Tilt				
OVEN CAVITY					
Gross Capacity (cbft)	4.				
Usable Capacity (cbft)	4.				
Cavity Enamel Colour	Black				
Rack Positions	6				
Oven Lights	3x20W Halogen				
HEATING ELEMENTS (@240V)	A100 W				
Broil Upper Heating Element	3100 W				
Upper Auxiliary Element	1032 W				
Lower Auxiliary Element	600 W				
Concealed Bake Lower Heating Element Convection Element	1400 W 2500 W				
OVEN ACCESSORIES	2500	J VV			
Chromed Racks	2				
Enameled Broiler Pan (basin + anti splash)	1				
Telescopic Chromed Rack	Opti				
DIMENSIONS/WEIGHT	Ори	on tal			
Overall dim - Width	29 - 11/16"	(754 mm)			
Overall dim - Height	27 - 7/8"	(707 mm)			
Overall dim - Neight Overall dim - Depth	24"	(610 mm)			
Cut-out - Width	28 - 7/16"	(722 mm)			
Cut-out - Height (min)	27 - 1/4"	(692 mm)			
Cut-out - Depth (min)	23 - 1/4"	(590 mm)			
Gross Weight	181 lbs	(82 kg)			
POWER / RATINGS (208/240 V, 60 HZ)	101 IDS (02 Ky)				
kW / Amps rating at 120-240V, 60Hz	3.70kW - 16.1A				
kW / Amps rating at 120-208V, 60Hz	3.49kW - 17.1A				
Power Cable	Conduit				
INSTRUCTIONS FOR USE	Conduit				
Use & Care Manual / Installation Manual	English / Fren	ch / Spanish			

#### DISTINTO

WARMING DRAWER

CODE ID	30" WARMING DRAWER F7DWD30S1		30" WARMIN F7IWI	
Туре	Warming Drawer		Warming Drawer	
Front finish	Stainle	ess Steel	Ove	erlay
Internal shelf	Ir	nox	In	ox
Compatible with ovens	F75P30S1 - F7DF	P30S1 - F4SP30S1	F75P30S1 - F7DP	30S1 - F4SP30S1
PERFORMANCE				
Maximum temperature	194°F	/ 90°C	194°F	/ 90°C
Cooking at low temperature (slow cooking)		•		•
Leavening		•		•
Heating dishes and food		•		
Slow close assistance		-		-
Open / Close push - pull system		•		
CONTROL				
Thermostat	86°F - 194°F / 30°C - 90°C		86°F - 194°F	/ 30°C - 90°C
Fan assisted	•			
Function Indicator / Thermostat on/off	•		•	
SAFETY				
Safety front	•			•
ELECTRICAL SPECIFICATIONS				
Max power absorbed (W)	1500W		150	00W
Power (V-Hz)	12	0/60	120	)/60
Power cord		•		
Plug		•	•	
CAPACITY				
Volume (cbft-litri)	2,1	61.4	2,1	61.4
DIMENSIONS				
Overall dim - Width	29 - 11/16"	(754 mm)	29 7/8"	(758 mm)
Overall dim - Height	10 3/8"	(264 mm)	10 3/8"	(264 mm)
Overall dim - Depth	22 3/4"	(578 mm)	22 3/4"	(578 mm)
Door Depth with Overlay	15/16"	(24 mm)	7/8"	(22 mm)
Cut-out - Width	28 5/8"	(727 mm)	28 5/8"	(727 mm)
Cut-out - Height	9 1/8"	(235 mm)	9 1/8"	(235 mm)
Cut-out - Depth	24" (610 mm)		24"	(610 mm)
WEIGHT				
Net Weight	67 lbs	30.1 Kg	62 lbs	28.1 Kg
Gross Weight	73 lbs	33.2 Kg	69 lbs	31.2 Kg

TECHNICAL

MULTIFUNCTION SELF-CLEAN OVEN





#### DISTINTO

MULTIFUNCTION EASY-CLEAN OVEN





CODE ID	30" MULTIFUNCTION SELF-CLEAN OVEN F1SP30S1		24" MULTIFUNCTION SELF-CLEAN OVEN F1SP24S2		
Series	100		100		
Finish	Stainle	ess Steel	Stainle	ss Steel	
CONTROL PANEL				Ciaminoso Cicor	
Control Type	Flec	tronic	Flec	tronic	
Display: Clock - Timer - Temperature		d LED		LED	
Language		glish		glish	
OVEN	En	9.0.1		9.1011	
Туре	Flec	tronic	Flec	tronic	
.,,,,,,		nic Control		ic Control	
Temperature Regulation		185°F - 50/250°C)		85°F - 50/250°C)	
OVEN FUNCTIONS					
	Pyrolytic Self-Clean	Bake	Pyrolytic Self-Clean	Bake	
	True Convection	Thaw (Defrost)	True Convection	Thaw (Defrost)	
	Convection Bake	Oven Lights	Convection Bake	Oven Lights	
	Convection Broil	Broil	Convection Broil	Broil	
	Convection Roast		Convection Roast		
GAS OVEN FEATURES		•		•	
	Temperatu	re Display °C/°F	Temperatur	e Display °C/°F	
OVEN DOOR(S)	iomporatare Biopia, 67 i		Temperature Diopiay O/ 1		
Oven Glass Window	Large See Through Glass		Large See Through Glass		
Door Cooling System	4 Heat Resistant Glasses		4 Heat Resistant Glasses		
Door Hinges	Heavy Duty Steady Tilt		Heavy Duty Steady Tilt		
Handle Style	Tubular Steel		Tubular Steel		
OVEN CAVITY					
Gross Capacity (cbft)	3.0		2	2.6	
Usable Capacity (cbft)	2.8			2.4	
Cavity Enamel Colour	2.0 Black			ack	
Rack Positions	4			5	
Oven Lights	2x20W Halogen			Halogen	
HEATING ELEMENTS (@240V)	EXECUT	Tidlogon .	IXEGU	Tidiogon	
Broil Upper Heating Element	3	3100 W	1	200 W	
Upper Auxiliary Element	1032 W			000 W	
Lower Auxiliary Element		600 W	-		
Concealed Bake Lower Heating Element		400 W	1	100 W	
Convection Element		2500 W	1100 W 2300 W		
OVEN ACCESSORIES	2	.500 W	2300 W		
Chromed Racks		2	0		
Enameled Broiler Pan (basin + anti splash)		1	2		
Telescopic Chromed Rack	On	tional	1 Optional		
DIMENSIONS/WEIGHT	Ор	lional	Орі	lionai	
	00 0/0"	(745 mm)	00 0/0"	(504 mm)	
Overall dim - Width	29 - 3/8"	(745 mm)	23 - 3/8"	(594 mm)	
Overall dim - Height	23 - 3/16"	(589 mm)		(594 mm)	
Overall dim - Depth	22 - 1/16"	(560 mm)	21 - 7/8"	(556 mm)	
Cut-out - Width	28"	(710 mm)	22 - 1/16"	(560 mm)	
Cut-out - Height (min)	23"	(585 mm)	23"	(585 mm)	
Cut-out - Depth (min)	24"	(610 mm)	22 - 1/16"	(560 mm)	
Gross Weight	148 lbs	(67 kg)	90 lbs	(41 kg)	
POWER / RATINGS (208/240 V, 60 HZ)	0.00111	V 45.0A	0.05111	/ 10.04	
kW / Amps rating at 120-240V, 60Hz		V - 15.6A		/ - 13.9A	
kW / Amps rating at 120-208V, 60Hz		V - 17.4A		/ - 12.3A	
Power Cable	Со	nduit	Cor	nduit	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish	

CODE ID	30" MULTIFUNCTION EASY-CLEAN OVEN F1SM30S1		24" MULTIFUNCTION EASY-CLEAN OVEN F1SM24S2		
Series	100		100		
Finish	Stainle	ess Steel	Stainless Steel		
CONTROL PANEL	Starrios Stool		Otali iless Steel		
Control Type	2 Knobs	/6 Buttons	2 Knobs/3 Buttons		
Display: Clock - Timer		I LED		LED	
OVEN	Tiec	LLD	Tied	LLD	
Type	Flec	tronic	Flec	tronic	
Турс		nanical Control		anical Control	
Temperature Regulation		40°F - 50/285°C)		80°F - 50/250°C)	
OVEN FUNCTIONS					
	Convection Bake	Thaw (Defrost)	True Convection	Bake	
	Convection Broil	Lower Bake	Convection Bake	Oven Lights	
	Convection Roast	Oven Lights	Convection Broil	Broil	
	Pizza (Lower Convection)	Broil	Convection Roast		
	Bake				
OVEN DOOR(S)					
Oven Glass Window	Large See T	hrough Glass	Large See T	hrough Glass	
Door Cooling System	3 Heat Resi	stant Glasses	3 Heat Resis	stant Glasses	
Door Hinges	Heavy Dut	y Steady Tilt	Heavy Duty Steady Tilt		
Handle Style	Tubular Steel		Tubular Steel		
OVEN CAVITY					
Gross Capacity (cbft)	3.0		2.6		
Usable Capacity (cbft)	2.8		2.4		
Cavity Enamel Colour	Black		BI	ack	
Rack Positions	4		5		
Oven Lights	2x20W Halogen		1x20W	Halogen	
HEATING ELEMENTS (@240V)	·				
Broil Upper Heating Element	3100 W		1:	200 W	
Upper Auxiliary Element	1	032 W	1000 W		
Lower Auxiliary Element		-	-		
Concealed Bake Lower Heating Element	2	100 W	1100 W		
Convection Element		-	2300 W		
OVEN ACCESSORIES			_		
Chromed Racks		2		2	
Enameled Broiler Pan (basin + anti splash)		sin only)	1		
Telescopic Chromed Rack	,	-	Optional		
DIMENSIONS/WEIGHT					
Overall dim - Width	29 - 3/8"	(745 mm)	23 - 3/8"	(594 mm)	
Overall dim - Height	23 - 3/16"	(589 mm)	23 - 3/8"	(594 mm)	
Overall dim - Depth	22 - 1/16"	(560 mm)	21 - 7/8"	(556 mm)	
Cut-out - Width	28"	(710 mm)	22 - 1/16"	(560 mm)	
Cut-out - Height (min)	23"	(585 mm)	23"	(585 mm)	
Cut-out - Depth (min)	24"	(610 mm)	22 - 1/16"	(560 mm)	
Gross Weight	148 lbs	(67 kg)	90 lbs	(41 kg)	
POWER / RATINGS (208/240 V, 60 HZ)		ופיי ו	35.35	1 ( (8)	
kW / Amps rating at 120-240V, 60Hz	3 63kW	V - 15.6A	2 35kV	V - 9.8A	
kW / Amps rating at 120-208V, 60Hz	3.63kW - 15.6A 2.76kW - 13.7A				
Power Cable	2.76KW - 13.7A Conduit			1.80kW - 8.6A Conduit	
INSTRUCTIONS FOR USE	001		001		
Use & Care Manual / Installation Manual	English / Ero	unch / Spanish	English / Ero	nch / Spanish	
Ose a Care ivianuai / iristaliation ivianual	English / French / Spanish		English / French / Spanish		

GAS COOKTOP





#### DISTINTO

GAS COOKTOP





CODE ID	44" GAS COOKTOP F4GK42S1		36" GAS COOKTOP F4GK36S1		
Series	41	00	4	400	
Finish	Stainle	ss Steel	Stainle	ss Steel	
CONTROL PANEL					
Control Type	Kn	obs	Kn	obs	
COOKTOP					
Type	GAS (N	G or LP)	GAS (N	G or LP)	
Cooking Surface	Matte Bla	ck Enamel	Matte Bla	ck Enamel	
GAS COOKTOP FEATURES					
Electric Re-ignition system		•		•	
Flame-out sensing		•		•	
Dual Flame Burner		•		•	
Simmer Plate	Opt	ional	Opt	ional	
Small Pot Insert (for single burners only)	Opt	ional	Opt	ional	
Wok Ring (for dual burner only)	Opt	ional	Opt	ional	
Heavy Duty Cast Iron Grates	4		3		
Cooking Zones	4		5		
Burners types	Sealed Burners (all) - Dual Flame/Simmer Burner (only Left)		Sealed Burners (all) - Dual Flame/Simmer Burner (only Center		
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W		-		
Power (Max/Min) (Front-L)		-	6300 (BTU/h) - 1850W / 1300 (BTU/h) - 380W		
Power (Max/Min) (Rear-L)		-	9000 (BTU/h) - 2640W	/ 1300 (BTU/h) - 380W	
Power (Max/Min) (L Center)	4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W			-	
Power (Max/Min) (Front Center)		-	18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W	
Power (Max/Min) (R Center)	9000 (BTU/h) - 2640W	/ 1300 (BTU/h) - 380W	-		
Power (Max/Min) (Front-R)		-	4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W		
Power (Max/Min) (Rear-R)		-	12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W		
Power (Max/Min) (Right)	15000 (BTU/h) - 4400W	/ 2700 (BTU/h) - 790W		-	
DIMENSIONS/WEIGHT					
Overall dim - Width	44"	(1120 mm)	36"	(910 mm)	
Overall dim - Height	5 - 3/16"	(132 mm)	5 - 3/16"	(132 mm)	
Overall dim - Depth	16 - 3/4"	(425 mm)	20 - 1/16"	(510 mm)	
Cut-out - Width	43 - 1/8", 43 - 1/4"	(1096 mm) - (1099 mm)	34 - 7/8", 35"	(886 mm) - (889 mm)	
Cut-out - Height (min)	3 - 15/16"	(74 mm)	3 - 15/16"	(74 mm)	
Cut-out - Depth (min - max)	15 - 15/16", 16 - 1/16"	(405 mm) - (408 mm)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)	
Gross Weight	45 lbs	(20 kg)	55 lbs	(25 kg)	
POWER / RATINGS (120 V, 60 HZ)					
Amps	0.1A		0.1A		
Max Power	46000 (BTU/h) - 13475W		,	/h) - 15320W	
Power Cable	Nema 5-15P		Nema	5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / French / Spanish English / French / Span		nch / Spanish		

CODE ID	30" GAS COOKTOP F4GK30S1		24" GAS COOKTOP F4GK24S1		
Series	4	400	400		
Finish	Stainle	ess Steel	Stainle	ss Steel	
CONTROL PANEL					
Control Type	Kr	nobs	Kn	obs	
COOKTOP					
Туре	GAS (N	IG or LP)	GAS (N	G or LP)	
Cooking Surface	Matte Bla	ack Enamel	Matte Bla	ck Enamel	
GAS COOKTOP FEATURES					
Electric Re-ignition system		•		•	
Flame-out sensing		•		•	
Dual Flame Burner		•		•	
Simmer Plate	Opt	tional	Opt	ional	
Small Pot Insert (for single burners only)	Opt	tional	Opt	ional	
Wok Ring (for dual burner only)	Optional		- -		
Heavy Duty Cast Iron Grates	2		4		
Cooking Zones	5		4		
Burners types	Sealed Burners (all) - Dual Fl	ame/Simmer Burner (only Left)	Sealed Burners (all) - Dual Flame/Simmer Burner (only Front-L)		
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W		<del>-</del>		
Power (Max/Min) (Front-L)	-		18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W	
Power (Max/Min) (Rear-L)	-		6300 (BTU/h) - 1850W	/ 1300 (BTU/h) - 380W	
Power (Max/Min) (Front Center)	4000 (BTU/h) - 1175W	/ 1000 (BTU/h) - 295W		-	
Power (Max/Min) (Rear Center)	12000 (BTU/h) - 3520W	/ 2200 (BTU/h) - 645W	-		
Power (Max/Min) (Front-R)	6300 (BTU/h) - 1850W	/ 1300 (BTU/h) - 380W	4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W		
Power (Max/Min) (Rear-R)	9000 (BTU/h) - 2640W	/ 1300 (BTU/h) - 380W	12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W		
DIMENSIONS/WEIGHT					
Overall dim - Width	30"	(760 mm)	24 - 1/2"	(620 mm)	
Overall dim - Height	5 - 3/16"	(132 mm)	5 - 3/16"	(132 mm)	
Overall dim - Depth	20 - 1/16"	(510 mm)	20 - 1/16"	(510 mm)	
Cut-out - Width	29", 29 - 1/8"	(737 mm) - (740 mm)	23 - 1/2", 23 - 5/8"	(597 mm) - (600 mm)	
Cut-out - Height (min)	3 - 15/16"	(74 mm)	3 - 15/16"	(74 mm)	
Cut-out - Depth (min - max)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)	
Gross Weight	45 lbs	(20 kg)	41 lbs	(19 kg)	
POWER / RATINGS (120 V, 60 HZ)					
Amps	0.1A		0.1A		
Max Power	49300 (BTU/h) - 14440W		40300 (BTU	/h) - 11800W	
Power Cable	Nema 5-15P		Nema 5-15P		
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	English / French / Spanish	

210 FULGOR MILANO

DATA

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



CODE ID	36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT36S1					
Series		700				
Finish		Ceramic glass with	n aluminum frame			
CONTROL PANEL						
Control Type		Touch (	Control			
СООКТОР						
Туре		INDUC	CTION			
Cooking Surface		Ceramio	Glass			
Slider Touch Control for Power Setting		•				
Digital Display for Power Level		•				
INDUCTION COOKTOP FEATURES						
Pot Detection System		•				
Bridge double zone		•				
Power Levels		1 to	9			
Warming Function 158°F / 70°C		•				
Booster/Fast Boil Function for Each Zone		•				
Auto-boil and Reduce for Each Zone		•				
Residual Heat Indication		•				
Individual Timer for each Zone		•				
Child Lock	•					
Key Lock (LED)	•					
Pause/recall (LED)	•					
General ON/OFF Key (LED)		•				
Cooking Zones		5	i			
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W		
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W		
Burners types (Front Central) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W		
Burners types (Rear/Front-R) - Power (Max/Booster)	(Octagonal) Inductor	7 - 1/2" x 8 - 1/2"	(190 mm x 220 mm)	2000W / 3600W		
DIMENSIONS/WEIGHT						
Overall dim - Width		36 - 3/16"	(919 mm)			
Overall dim - Height		4"	(100 mm)			
Overall dim - Depth		21 - 3/16"	(538 mm)			
Cut-out - Width (Tolerance)		34 - 5/8" tol. 1/16"	(879 mm) - (tol. 1 mm)			
Cut-out - Height	2 - 5/8" + conduit 1 - 1/16" (67 mm) + conduit (27 mm)					
Cut-out - Depth (Tolerance)	19 - 3/8" tol. 1/16" (492 mm) - (tol. 1 mm)					
Gross Weight		55 lbs	(25 kg)			
POWER / RATINGS (208/240 V, 60 HZ)						
kW / Amps rating at 240V, 60Hz	10.8 kW - 45A					
kW / Amps rating at 208V, 60Hz	9.4 kW - 45A					
Power Cable	Conduit					
INSTRUCTIONS FOR USE						
Use & Care Manual / Installation Manual		English / Fren	ch / Spanish			

#### DISTINTO

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



CODE ID	30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT30S1			
Series		-	700	
Finish		Ceramic glass w	ith aluminum frame	
CONTROL PANEL				
Control Type		Touch	Control	
COOKTOP				
Туре		INDL	JCTION	
Cooking Surface		Ceran	nic Glass	
Slider Touch Control for Power Setting			•	
Digital Display for Power Level			•	
INDUCTION COOKTOP FEATURES				
Pot Detection System			•	
Power Levels		1	to 9	
Warming Function 158°F / 70°C			•	
Booster/Fast Boil Function for Each Zone			•	
Auto-boil and Reduce for Each Zone	•			
Residual Heat Indication	•			
Individual Timer for each Zone	•			
Child Lock			•	
Key Lock (LED)	-		•	
Pause/recall (LED)	•			
General ON/OFF Key (LED)			•	
Cooking Zones			4	
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
Burners types (Rear-R) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W
Burners types (Front-R) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
DIMENSIONS/WEIGHT			,	
Overall dim - Width		30 - 3/8"	(771 mm)	
Overall dim - Height		4"	(100 mm)	
Overall dim - Depth		21 - 3/16"	(538 mm)	
Cut-out - Width (Tolerance)		28 - 3/4" tol. 1/16"	(730 mm) - (tol. 1	I mm)
Cut-out - Height		2 - 5/8" + conduit 1 - 1/16	(67 mm) + condu	uit (27 mm)
Cut-out - Depth (Tolerance)	19 - 7/16" tol. 1/16" (494 mm) - (tol. 1 mm)			
Gross Weight	40 lbs (18 kg)			
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	7.2 kW - 30A			
kW / Amps rating at 208V, 60Hz	6.45 kW - 31A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish			

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



CODE ID	36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT36S2			
Series		600		
Finish	Ceramic glas	s with aluminum frame		
CONTROL PANEL				
Control Type	То	uch Control		
COOKTOP				
Type		RADIANT		
Cooking Surface	Ce	eramic Glass		
RADIANT COOKTOP FEATURES				
Power Setting	Peacock S	Slider Touch Control		
Digital Display for Power Level		5		
Low Power Scale for Delicate Cooking		•		
Control Display Lock		•		
Automatic Fast Boil Function		•		
Hot Surface Indication		•		
Timer Functions		1+5		
Timer Display	•			
Acoustic Buzzer	•			
Failure Codes Indication	•			
Cooking Zones		5		
Burners types (Front/Rear-L) - Power	7"	(180 mm)	1800W	
Bridge Element - Power			800W	
Burners types (Central) - Power	9"/7"/5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W	
Burners types (Rear-R) - Power	7"	(180 mm)	1800W	
Burners types (Front-R) - Power	6"	(153 mm)	1200W	
DIMENSIONS/WEIGHT				
Overall dim - Width	36 - 3/16"	(919 mm)		
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mm)		
Overall dim - Depth	21 - 3/16"	(538 mm)		
Cut-out - Width (min - max)	34 - 1/16", 34 - 5/16"	(865 mm) - (872 mm)		
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mm)		
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8" (490 mm) - (498 mm)			
Gross Weight	44 lbs (20 kg)			
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	9.90kW - 41.3A			
kW / Amps rating at 208V, 60Hz	7.44kW - 35.8A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish			

#### DISTINTO

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



CODE ID	30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT30S2			
Series		600		
Finish	Ceramic glas	s with aluminum frame		
CONTROL PANEL	v			
Control Type	То	uch Control		
COOKTOP				
Туре		RADIANT		
Cooking Surface	Ce	eramic Glass		
RADIANT COOKTOP FEATURES				
Power Setting	Peacock S	Slider Touch Control		
Digital Display for Power Level		4		
Low Power Scale for Delicate Cooking		•		
Control Display Lock		•		
Automatic Fast Boil Function		•		
Hot Surface Indication	•			
Timer Functions		1+4		
Timer Display		•		
Acoustic Buzzer	•			
Failure Codes Indication		•		
Cooking Zones		4		
Burners types (Front-L) - Power	6"	(153 mm)	1200W	
Burners types (Rear-L) - Power	9"/ 7"/ 5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W	
Burners types (Rear-R) - Power	8"/ 5"	(203 mm / 127 mm)	2200W / 800W	
Burners types (Front-R) - Power	6"	(153 mm)	1200W	
DIMENSIONS/WEIGHT				
Overall dim - Width	30 - 3/8"	(771 mm)		
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mm)		
Overall dim - Depth	21 - 3/16"	(538 mm)		
Cut-out - Width (min - max)	28 - 11/16", 28 - 15/16"	(729 mm) - (735 mm)		
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mm)		
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8"	(490 mm) - (498 mm)		
Gross Weight	36 lbs	(16 kg)		
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	7.10kW - 29.6A			
kW / Amps rating at 208V, 60Hz	5.33kW - 25.6A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish			

RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



CODE ID	24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM F3RK24S2			
Series		300		
Finish	Ceramic glas	s with aluminum frame		
CONTROL PANEL	-			
Control Type		Knobs		
СООКТОР				
Туре		RADIANT		
Cooking Surface	Ce	eramic Glass		
RADIANT COOKTOP FEATURES				
Power Setting		9 Levels		
Digital Display for Power Level		-		
Hot Surface Indication	•			
Cooking Zones		4		
Burners types (Front-L) - Power	7 - 3/4" / 4 - 3/4"	(197 mm / 121 mm)	1900W / 800W	
Burners types (Rear-R) - Power	5 - 1/2"	(140 mm)	1200W	
Burners types (Front-R - Rear-L) - Power	7"	(180 mm)	1800W	
DIMENSIONS/WEIGHT				
Overall dim - Width	24"	(618 mm)		
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mr	n)	
Overall dim - Depth	21 - 3/16"	(538 mm)		
Cut-out - Width (min - max)	22 - 5/8", 22 - 13/16"	(574 mm) - (580 mm)		
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mr	n)	
Cut-out - Depth (min - max)	19 - 1/4", 19 - 9/16"	(490 mm) - (497 mm)		
Gross Weight	30 lbs	(14 kg)		
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	6.10kW - 25.4A			
kW / Amps rating at 208V, 60Hz	4.58kW - 22.0A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English /	/ French / Spanish		

#### DISTINTO

INSERT HOOD





CODE ID	34" INSERT HOOD F6BP34S1		28" INSERT HOOD F4BP28S1	
Series	600		400	
Finish	Insert - Stai	nless Steel	Insert - Sta	inless Steel
CONTROL PANEL				
Control Type	4 speed mech	anical control	4 speed mech	nanical control
PERFORMANCES				
Output (CFM)	60	0	60	00
Sound Level (dB)	69	9	6	9
Motor	Or	ne	Oı	ne
Venting Type	Ducted and	recirculating	Ducted and recirculating	
FEATURES				
Filter Style	Pro B	affle	Baffle	
Lighting	2 x 1.2\	W LED	2 x 1.2W LED	
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	34 - 1/4"	(870 mm)	28 - 3/8"	(720 mm)
Overall dim - Height	13 - 1/8"	(330 mm)	10 - 5/8"	(270 mm)
Overall dim - Depth	18 - 1/2"	(470 mm)	15 - 3/4"	(400 mm)
Cut-out (w x d)	32 - 1/16" x 16 - 1/2"	(814 mm x 419 mm)	26 - 1/8" x 14 - 1/4"	(664 mm x 362 mm)
Gross Weight	51 lbs	(23 kg)	33 lbs	(15 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W - 3.8A		430W - 3.8A	
Power Cable	Nema 5-15P		Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	

#### DISTINTO

UNDERCABINET HOOD





CODE ID	36" UNDERCABINET HOOD F4UC36S1		30" UNDERCABINET HOOD F4UC30S1	
Series	4	00	40	0
Finish	Undercabinet -	Stainless Steel	Undercabinet -	Stainless Steel
CONTROL PANEL				
Control Type	4 speed push	button control	4 speed pushl	outton control
PERFORMANCES				
Output (CFM)	4	50	45	0
Sound Level (dB)	6	9	6	9
Motor	0	ne	One	
Venting Type	Ducted and	recirculating	Ducted and recirculating	
FEATURES				
Filter Style	Ва	ffle	Bat	fle
Lighting	2 x 1.2W LED		2 x 1.2W LED	
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 7/8"	(910 mm)	29 - 13/16"	(760 mm)
Overall dim - Height	10 - 1/4"	(260 mm)	18"	(460 mm)
Overall dim - Depth	21 - 1/8"	(535 mm)	24"	(610 mm)
Gross Weight	46 lbs	(21 kg)	61 lbs	(28 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W - 3.8A		430W - 3.8A	
Power Cable	Nema 5-15P		Nema 5-15P	
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish	English / French / Spanish	



BUILT-IN WINE CELLAR



CODE ID	F7IBM36O1-	-IN FRIDGE L (LEFT DOOR) I (RIGHT DOOR)		
Series	7	700		
Finish	Distinto - Overlay Panel			
PERFORMANCES/CAPACITY				
Annual Energy Usage	\$70 (5	80 kWh)		
Noise Level db		40		
Fridge compartment capacity (cbft)	1	4.7		
Flexzone Bottom-Drawer capacity (cbft)	,	3.8		
FEATURES				
Fridge Compartment				
Glass Shelves		2		
Adjustable Door Shelves		3		
Micro shot-peened Stainless Steel Drawers	2 Lov	v Temp		
Flexzone Bottom-Drawer				
White Painted Drawers		1		
Internal Drawers	1+1	ice tray		
LED lighting		•		
Ice Maker		•		
Equipment				
No Frost		•		
Flexzone		•		
TruPivot hinges		•		
DIMENSIONS/WEIGHT				
Width in	35 - 3/8"	(900 mm)		
Height in	83 - 1/2"	(2121 mm)		
Depth without handle in	24"	(610 mm)		
Minimum niche height in	84"	(2134 mm)		
Door clearance in	57 - 7/8"	(1470 mm)		
Door opening angle	1	05°		
Net Weight	474 lbs	(215 kg)		
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	552V	/ - 4.8A		
Power Cable	Nema	a 5-15P		
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish		

CODE ID	24" BUILT-IN WINE CELLAR F7IBW2401-L (LEFT DOOR) F7IBW2401-R (RIGHT DOOR)		
Series	700		
Finish	Distinto - Overlay Panel		
PERFORMANCES/CAPACITY	·		
Noise Level db	41		
Riserva Compartment capacity (bottles)	36		
Wine Cellar Compartment capacity (bottles)	18		
Flexzone Bottom-Drawer capacity (cbft)	2		
FEATURES			
Riserva storage compartment			
Natural wood shelves	6		
Wine Cellar Compartment			
Natural wood shelves	3		
Flexzone Bottom-Drawer			
White Painted Drawers	1		
Internal Drawers	1		
LED lighting	•		
Glass door	•		
Equipment			
TriplePlay Refrigeration	•		
No Frost	•		
Flexzone	•		
TruPivot hinges	•		
DIMENSIONS/WEIGHT			
Width in	23 - 5/8" 600 mm)		
Height in	83 - 1/2" (2121 mm)		
Depth without handle in	24" (610 mm)		
Minimum niche height in	84" (2134 mm)		
Door clearance in	46" (1168 mm)		
Door opening angle	105°		
Net Weight	386 lbs (175 kg)		
POWER / RATINGS (115 V, 60 HZ)			
Watts / Amps	472W - 4.1A		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		

INTEGRATED DISHWASHER



CODE ID	24" INTEGRATED DISHWASHER WITH STAINLESS STEEL EXTERIOR F6DW24SS1				
Series	600				
Finish	Fully Integrated	- Stainless Steel			
PERFORMANCES					
Place Settings	1				
Energy Consumption (kWh / year)		65			
Water Consuption (liters / year)		60			
Sound level (dB)	5	0			
HIDDEN CONTROLS					
Program Selector	Grey Pusi	h Buttons			
On / Off button					
Number of Buttons		4			
Program Gauge		ed			
Temperature		5° - 65° - 70°			
Delay Timer	Display 1				
Rinse Aid Level Indicator	Lig	ght			
Acoustic Signal at End PROGRAMMES					
		0			
Wash programs	Rapid 27'	Normal (Energy Star)			
Draguan		Extreme wash (Sanitization)			
Program	Crystal	Extreme wash (Sanitization)			
	Daily half load	For milet			
Foot evelop	Rinse Light quick	Eco quick			
Fast cycles	<u> </u>	Strong and fast			
CTI Conitination listed	Normal quick	•			
ETL Sanitization listed FEATURES		•			
Tub Material	Stainles	on Stool			
Internal Door	Stainles				
Lower Spray Arm		55 Oteel			
Top Spray Arm		<u> </u>			
Aquastop		- ull			
Keating Element	Concealed he				
Turbidness Sensor	Obliceated Tie	aung ciomoni			
Hinges	Fixed Fulcrum -	Not Δdiustable			
Rear Foot Adjustment	Tixed Full distant	Not Adjustable			
Single Load	4.0 - Press	sure switch			
Length of Inlet Hose (mm)		72			
Length of Drain Hose (mm)		70			
Water Hardness Max	100°fH				
BASKETS		, 00 u			
Baskets Color	Gr	rey			
Lower Basket		,			
Upper Basket					
Upper Basket Adjustment	Automati	c 3 levels			
Cutlery Basket		ttings			
DIMENSIONS/WEIGHT					
Overall dim - Width	23 - 9/16"	(598 mm)			
Overall dim - Height (min - max)	33 - 13/16", 35 - 3/4"	(860 mm) - (910 mm)			
Overall dim - Depth	23 - 3/16"	(589 mm)			
Cut-out - Width	23 - 5/8"	(600 mm)			
Cut-out - Height (min)	33 - 7/8"	(860 mm)			
Cut-out - Depth (min - max)	22 - 5/8"	(575 mm)			
Gross Weight	101 lbs (46 kg)				
POWER / RATINGS (115 V, 60 HZ)					
kW / Amps rating	1.4 kW	/ - 13A			
Power Cable	Nema				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish			
	English / French / Spanish				

#### DISTINTO

INTEGRATED DISHWASHER



CODE ID	24" FULLY INTEGRATED DISHWASHER F6DW24FI1			
Series	60	00		
Finish	Fully Integrated	d - Panel Ready		
PERFORMANCES	. , ., .,			
Place Settings	1	3		
Energy Consumption (kWh / year)		- 65		
Water Consuption (liters / year)		60		
Sound level (dB)	5	0		
HIDDEN CONTROLS				
Program Selector	Grey Pus	h Buttons		
On / Off button		•		
Number of Buttons	4	4		
Program Gauge	Re	ed		
Temperature	38° - 45° - 5	5° - 65° - 70°		
Delay Timer	Display 1	1 digit 9h		
Rinse Aid Level Indicator	Liç	ght		
Acoustic Signal at End		•		
PROGRAMMES				
Wash programs	1	0		
. 0	Rapid 27'	Normal (Energy Star)		
Program	Crystal	Extreme wash (Sanitization)		
· ·	Daily half load	,		
	Rinse	Eco quick		
Fast cycles	Light quick	Strong and fast		
,	Normal guick	3		
ETL Sanitization listed		•		
FEATURES				
Tub Material	Stainles	ss Steel		
Internal Door	Stainless Steel			
Lower Spray Arm	•			
Top Spray Arm		•		
Aquastop	Full			
Keating Element		eating element		
Turbidness Sensor	00.1004.04	•		
Hinges	Fixed Fulcrum -	Not Adjustable		
Rear Foot Adjustment		•		
Single Load	4 N - Press	sure switch		
Length of Inlet Hose (mm)		72		
Length of Drain Hose (mm)		70		
Water Hardness Max		; 58°dH		
BASKETS	100 111	, 30 ui i		
Baskets Color	Cr	rey		
Lower Basket		•		
Upper Basket		<u> </u>		
Upper Basket Adjustment		c 3 levels		
Cutlery Basket		ttings		
DIMENSIONS/WEIGHT	13 SE	sungo		
Overall dim - Width	23 - 9/16"	(508 mm)		
Overall dim - Width Overall dim - Height (min - max)		(598 mm) (860 mm) - (910 mm)		
	33 - 13/16", 35 - 3/4"	, , , ,		
Overall dim - Depth	23 - 3/16" 23 - 5/8"	(589 mm)		
Cut-out - Width		(600 mm)		
Cut-out - Height (min)	33 - 7/8"	(860 mm)		
Cut-out - Depth (min - max)	22 - 5/8"	(575 mm)		
Gross Weight	106 lbs (48 kg)			
POWER / RATINGS (115 V, 60 HZ)				
kW / Amps rating		/ - 13A		
Power Cable	Nema 5-15P			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fren	nch / Spanish		

DATA

# FULGOR MILANO A PASSION



There are few places in the world where food has been the very backbone of a culture like it has been in Italy for centuries. A passion for cooking, creating and using local ingredients, has inspired generations of Italian families and has made the kitchen the heart of the home. The aroma of long hours of food preparation, tables filled with recipes handed down generation to generation, accompanied with the perfect local wine are moments that linger in our memories and give us a sense of home even when we are far away. These things are what being Italian is all about. The Meneghetti Family has brought us the Fulgor Milano line of products so that we too may be inspired to cook and create with this same passion at home. Every Fulgor Milano product has been designed and developed to not only meet or exceed expectations of performance and quality, but also provide a design that is uniquely Italian.

### DESIGNED IN ITALY



#### **UGO MARINELLO**

IDA Award winning designer Ugo Marinello is passionate about his work and his desire to synthesize modern rationality with traditional design. A graduate of IUAV in Venice, he draws inspiration from the unique architecture of that city, using it as a foundation to bring innovative yet timeless design and quintessential Italian spirit to your home and kitchen throughout the Fulgor Milano line.

#### ALFRED HENDRICKX

Known internationally for his mid-century furniture collections, designer Alfred Hendrickx began incorporating the strong lines of industrial styling and materials like stainless steel early in his career. After many successful design collaborations in Europe, he turned his attention to the design of household appliances, notably marrying modern form and function for Meneghetti and Fulgor Milano.









#### FULGOR MILANO

VIIL/ (I 10

Rosà - Vicenza - Italy www.fulgor-milano.com info@fulgor-milano.com