



# clothes care

## Contract Sales

New product introductions 2005

GE Profile Harmony™ clothes care system



*Profile*™

# GE Profile Harmony™ washer quick pitch

We're talking BIG! Big capacity. Big savings. Big results. Big dependability.

Only GE has it!



## Big Capacity

**King-size, 4.0 cu. ft. stainless steel basket**—the largest-capacity washer available. Which means up to 110 fewer loads per year.\*



## Big Savings

**HydroWash™ system** achieves frontload wash performance with topload convenience. Saves up to 14 gallons of water per average load\*\* and up to a 90% improvement of the energy factor.\*\*\*

Only GE has it!



## Big Results

**Stain Inspector™ system** is the most comprehensive stain removal system available.†

## Big Dependability

GE Profile washers are the most dependable washers in the industry.††



## CleanSpeak communication system with English/Spanish LCD display

The washer communicates electronically with the dryer, which then presets dry cycles for better clothes care, increased time savings and greater convenience.



\*At full IEC capacity and 10 loads per week, compared to a super capacity machine, WWSE5240.

\*\*Model WPGT9360 compared to a typical topload washer, WWSE5240D.

\*\*\*Model WPGT9360 compared to the MEF requirement of the DOE Energy Standard.

†Based on number of stains treated, automatic settings matching soil, fabric type and color.

††Based on an independent national survey of consumers who have purchased a leading brand of washer from 2001-2004.

# GE Profile Harmony dryer quick pitch



## Big Capacity

**King-size, 7.3 cu. ft. stainless steel drum**—combines with the Harmony washer to create the largest-capacity laundry pair available. It handles king-size items and family-size loads.



Only GE has it!

## Big Savings


**Fastest premium dryer you can buy**—uses computer-controlled heating to deliver speed and accuracy, saving you time and effort.



Only GE has it!

## Big Results

**DuoDry™ system** with dual motors and dual electronic thermistors for consistent heat and better clothes care.

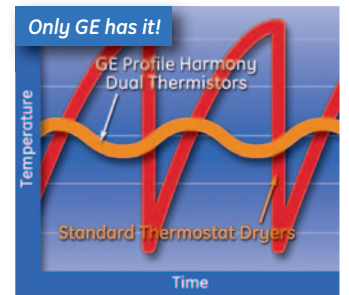

Only GE has it!

## Big Dependability

Moisture resistant controls, 430 grade stainless steel drum and tempered-glass door lead to years of reliable use.




Not all features available on all models.

# Feature gallery: GE Profile Harmony™ clothes care system

We're talking BIG! Big capacity. Big savings. Big results. Big dependability.

## GE Profile Harmony™ washer

### TOUCH TO SELECT WASH CYCLE



### TOQUE PARA ESCOGER UN CICLO DE LAVADO



Model WPGT9360

### English/Spanish LCD

controls are accessed by touching "Help" and then choosing machine preference.



Model WPGT9360

### HydroView™ tempered-glass lid

Allows you to view clothes during the cleaning process, without opening the lid or stopping the wash cycle.



### King-size, 4.0 cu. ft. stainless steel basket

Makes room for more items, which means less time doing laundry. Plus, it allows easy access, without a pedestal.



The GE Profile Harmony clothes care system has won prestigious industry awards.

\*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine, per IEC ratios.

### GE Profile Harmony dryer


#### Wash recommended cycle recall button

Unique feature allows dryer to recall the last communicated wash cycle.



#### Tempered-glass door

Allows easy viewing of items, and the silver-satin frame provides an attractive look.



#### Interchangeable control panels and reversible dryer door

allow easy and flexible installation.



# The inside story: GE Profile Harmony™ clothes care system

## GE Profile Harmony washer



### Flow-Thru™ dispensing system

Time-releases detergent, bleach, fabric softener and additives for improved wash performance and convenience.



New!

### HydroWash System with Centrifusion

Infuses the detergent solution through clothes for gentle cleaning, without agitation.

### HydroHeater™

Increases wash temperature to clean tough stains on loads like white cottons. *Model WPGT9360*

### Rotating basket and Infusor

Unique action keeps brights bright and whites white.

### Direct-drive technology

Results in fewer parts, which means quiet, reliable operation.



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

## GE Profile Harmony dryer

### King-size, 7.3 cu. ft. stainless steel drum

Handles king-size items and family-size loads, which means fewer loads per week, saving time and money.

### Duo Dry™ System — Computer-controlled heating

Uses dual thermistors to help maintain consistent heat and two sensor bars to ensure the right level of dryness is reached.

### Adaptive-venting system

Delivers exceptional drying performance, with duct runs of up to 150 ft.\* for greater installation flexibility.

**Only GE has it!**

### Variable heater


Delivers constant heat, eliminating extreme temperature changes for optimal drying results.

**Only GE has it!**

### Dual motors

Ensure fast, even drying (one motor controls airflow—the other controls tumbling action).

\*Of equivalent ducting.

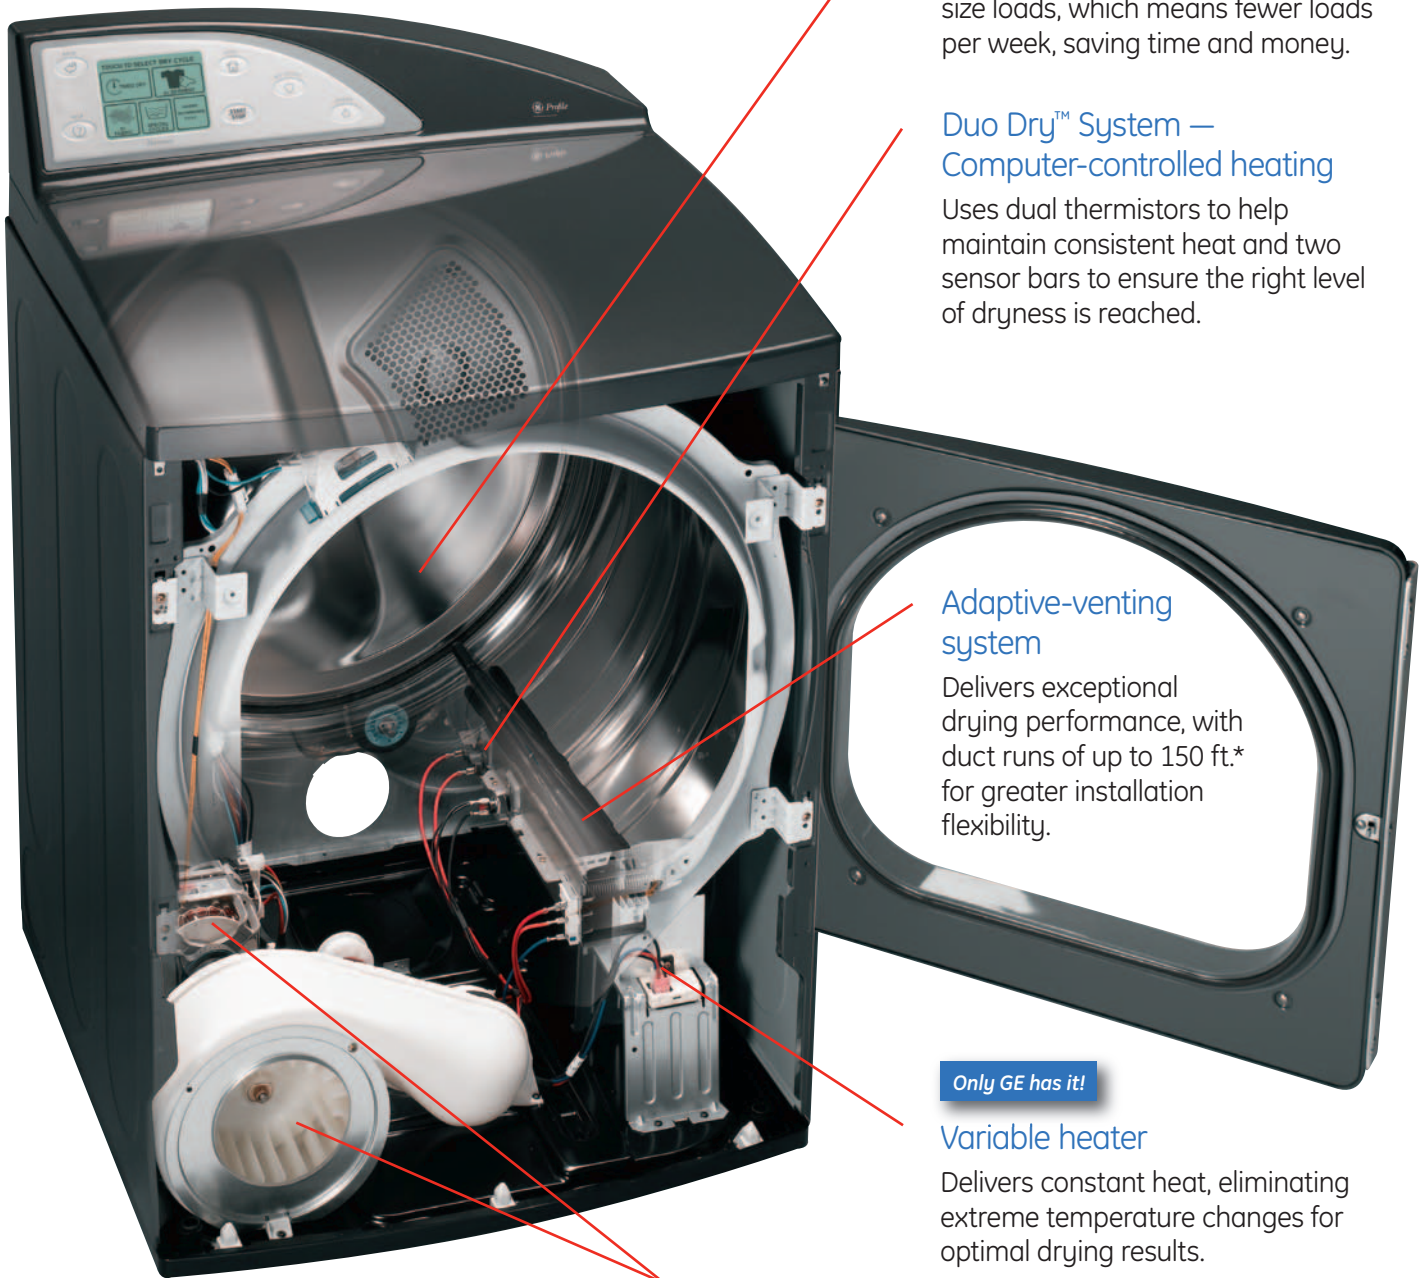

## Dare to compare

GE Profile Harmony™ clothes care system

Stain Inspector™ system—The most comprehensive stain-removal system just got even better

Easily and effectively treats more than 80 stains.\*

- Includes preset temperatures and wash/rinse combinations for common stains.
- Offers one easy way to treat stains: by stain type, fabric type or garment color.
- Saves users the trouble of handwashing items in the sink.

## Competitive comparison

	# Of Stain Selections	Dedicated Dispenser For Presoak	Based on Color, Fabric and Stain Type	Offers Pretreating Tips Onscreen
<b>GE Profile Harmony washer (WPGT9360E)</b>	<b>80</b>	<b>Yes</b>	<b>Automatic</b>	<b>Yes</b>
Whirlpool Duet™ frontload washer (GHW9250)	1	Yes	No	No
Maytag Neptune® frontload washer (MAH7500)	65	No	No	Yes
HE4T frontload washer (45981/6)	1	Yes	No	No
Maytag Neptune® topload washer (FAV9800)	65	Yes	No	Yes

*Stain Inspector simplifies the task of treating stains.*

\*WPGT9350C treats 65 stain selections.



King-size, 4.0 cu. ft.\* stainless steel washer—Largest-capacity washer available



- Room for more items, meaning up to 110 fewer loads per year\*\*.
- Handles a king-size comforter or up to 24 bath towels.
- Wide opening allows for easy access for quick loading and unloading.

Competitive comparison

	Capacity
<b>GE Profile Harmony washer (WPGT9360E)</b>	<b>4.0 cu. ft.</b>
Whirlpool Duet™ frontload washer (GHW9250)	3.8 cu. ft.
Maytag Neptune® frontload washer (MAH5500/MAH7500)	3.34 cu. ft.
HE4T frontload washer (45981/6)	3.8 cu. ft.
Maytag Neptune® topload washer (FAV9800)	3.5 cu. ft.

King-size, 7.3 cu. ft. stainless steel dryer—The fastest premium dryer you can buy!



- Stands up to the toughest, largest loads with a durable stainless steel drum and double-paned, reversible glass door.
- Features a king-size opening for easy loading and unloading. The largest dryer opening available!

Competitive comparison

	Drum Capacity (cubic feet)
<b>GE Profile Harmony (DPGT750EC/GC)</b>	<b>7.3</b>
Whirlpool Duet™ (GEW9200/GGW9200)	7.0
Maytag Neptune® (MDE7500/MDG7500)	6.0

GE Profile Harmony washer offers the industry's largest wash capacity.

\*Washes equivalent amount of clothes as a 4.0 cu. ft. agitator machine, per IEC ratios.  
 \*\*At full IEC capacity and 10 loads per week, compared to a super capacity machine, WWSE5240.

## Dare to compare GE Profile Harmony™ clothes care system

### HydroWash™ system




### Water savings

- HydroWash system uses as little as 17 gallons of water for a small load and 24 gallons for an average-size load.\* That translates to over 7,200 gallons of water per year.†
- The Harmony washer meets the criteria to earn the CEE (Consortium for Energy Efficiency), 3A wash rating.

\*Model WPGT9360 based on a 3-lb. small load and 8.8-lb. typical-size load, per DOE J1 test procedure.

†Based on an average cost of water, energy and sewer over 10 years of life using 10 loads/year compared to typical topload washer, WWSE5240.

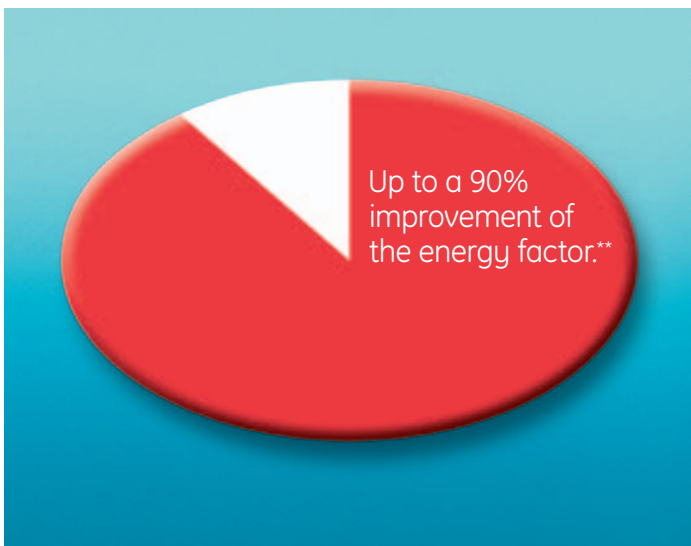

### Energy savings

- Efficient operation results in up to a 90% improvement of the energy factor.\*\*
- Save up to \$580 over the washer's life†

\*\*Model WPGT9360 compared to the MEF requirement of the DOE energy conservation standard.

†Based on an average cost of water, energy and sewer over 10 years of life using 10 loads/year compared to typical topload washer, WWSE5240.



### ENERGY STAR® qualification

GE Profile Harmony washer exceeds 2004 ENERGY STAR guidelines by 39%.\*\*\* Plus, it already meets 2007 energy standards.

\*\*\*Model WPGT9360

As an ENERGY STAR® partner, GE has determined that the WPGT9350C and WPGT9360E washers meet the ENERGY STAR® guidelines for energy efficiency.

## PARTNER OF THE YEAR 2004

*The HydroWash system is in Harmony with the environment.*

## HydroHeater™ internal water heater



- Improves wash performance by increasing wash temperature.
- In the Super Clean cycle the HydroHeater™ helps to achieve an “A” wash performance rating, the highest rating possible.\*
- HydroHeater is used in White Cotton, Super Clean and many Stain Inspector cycles.
- White sheets, towels and diapers stay whiter and brighter with heater cycles.


## Competitive comparison

	Internal Water Heater	Special Cycles For Heavily Soiled Whites
<b>GE Profile Harmony washer (WPGT9360E)</b>	<b>Yes</b>	<b>Yes</b>
Whirlpool Duet™ frontload washer (GHW9150)	No	No
Whirlpool Duet™ frontload washer (GHW9250)	Yes	Yes
Maytag Neptune® topload washer (FAV6800)	No	No
Maytag Neptune® topload washer (FAV9800)	Yes	Yes
Maytag Neptune® frontload washer (MAH5500)	No	No
Maytag Neptune® frontload washer (MAH7500)	Yes	No



## LCD touchscreen with English/Spanish option

- Allows users to view instructions in English or Spanish.
- Takes the guesswork out of doing laundry.
  - Users simply select a wash cycle based on how their laundry is sorted and press “Start.”
  - At the end of the wash cycle, the washer communicates electronically with the dryer, telling it everything it needs to know about drying the load.
  - The dryer automatically determines which settings will deliver the best results— Just choose the “Fabric Type” and press “Start.”
- Gives users the option of making their own cycle selections.
- Includes a new “Washer Recommended Cycle” for quick recall of settings for the just-washed load, as well as a Timed Dry program.
- If the user programs the washer by color or garment type, the dryer will ask for a “Fabric Type” before the user can press “Start.”

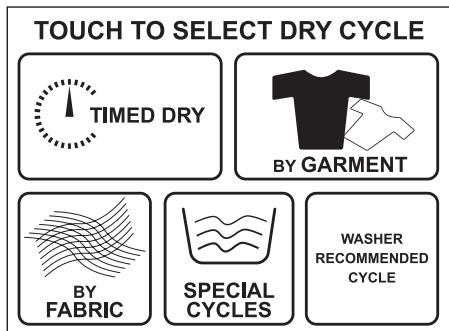


*One-touch programming make laundry faster and life easier.*

\*Per IEC test procedure 60456. Rating applies to the combined performance of the heater and HydroWash™ system.

## Dare to compare

GE Profile Harmony™ clothes care system

### DuoDry™ system

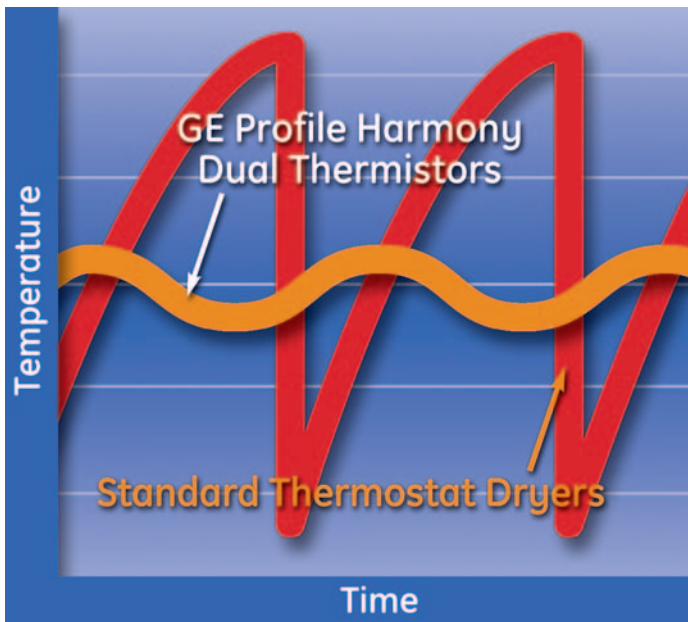

#### Dual motors—Industry's first


- One motor maintains proper airflow, and the other controls tumbling action.
- Blower motor adjusts for variables like the length of the dryer duct.

#### Dual electronic thermistors

- One thermistor maintains incoming air temperature, while the other measures outgoing temperature.
- Advanced electronics ensure a high degree of heating consistency for reduced dry times and optimal clothes care.

#### Variable heater

- Delivers constant heat, with no on-off cycling, for optimal drying results.

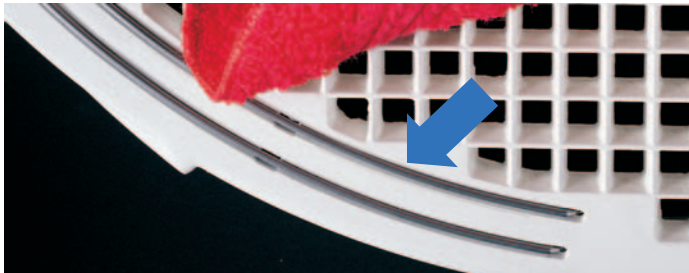

#### Computer-controlled heat sensing

- Moisture sensor bars continually measure moisture content in clothes to achieve the desired degree of dryness.
- Adaptive Cool-Down phase at the end of the dry cycle tumbles clothes with cool air to reduce wrinkling.



#### Lint filter

- Easy-access, recessed covered lint filter keeps lint from redepositing on clothes while unloading them.

*DuoDry system offers superior drying performance.*



### Delicate cycle with extra-low heat setting

- Maintains an average fabric temperature of 125°F, the ideal temperature for fine delicates.

### Competitive comparison

<b>GE Profile Harmony (DPGT750EC)</b>	<b>Extra Low 125° F</b>
Whirlpool Duet™ (GEW9200)	Extra Low 132° F
Maytag Neptune® (MDE7500)	UltraCare 130° F

*Harmony is the most delicate dryer among these leading competitors.*



### Better, faster clothes care

- The Harmony dryer performs faster than similarly priced machines. It shortens the laundry process, so you can focus on more important things.

### Competitive comparison

	<b>Average Dry Times</b>
<b>GE Profile Harmony (DPGT750EC)</b>	<b>40 min.</b>
Whirlpool Duet™ (GEW9200)	55 min.
Maytag Neptune® (MDE7500)	62 min.

*Harmony dries up to 27% faster than these competitors. Based on 8 lb AHAM load—100% cotton @ 100% IMC.*

*The Harmony dryer is the fastest premium dryer you can buy!*

# Show and tell

## 1. LCD demo option includes:



**LCD screen demo**—highlights system features and benefits.

**DEMO WASH ACTION**

**Demo Wash Action**—Sets the HydroWash™ system into action with or without water and pom-pom balls.

**LEARN MORE**

**“Learn More”**—Provides brief, onscreen explanations of various systems features.

**TRY THE CONTROLS**

**“Try the Controls”**—Gives users the opportunity to experience Harmony firsthand and find out how easy it is to operate.

## 2. HydroWash “Demo wash action” for model WPGT9360E:



**Live action demo**—shows HydroWash™ action with water and demo load. Use either with or without water.

**Pub. no. 14-D045**



Water treatment solution is available to keep water fresh.

**Pub. no. 14-D145**



Special demo cord allows you to show the communication occurring between washer and dryer.

**Pub. no. 14-A013**



**110V Demo cord kit**—available to convert 220V dryer for demonstration.

**Pub. no. 3-A029**



**Backlit Harmony display**

**Pub. no. 14-D083**

## GE Profile™ Harmony clothes care system

Available new models



Dark Platinum models shown; also available in White on white.

### GE Profile Harmony washer WPGT9360E

- CleanSpeak™ system communicates with DPGT750EC/GC
- HydroHeater™
- HydroView™ glass lid
- English/Spanish LCD option
- Reversible control panel
- 4.0 cu. ft.\* king-size capacity
- Infusor™
- HydroWash™ system with five wash actions
- ENERGY STAR®-qualified
- Flow-thru™ dispensing system
- Stain Inspector™ system
- Stainless steel wash basket
- 1010-RPM maximum spin speed
- Auto load sensing
- Adaptive fill
- Variable end-of-cycle signal
- Six custom cycle settings
- Supreme quiet performance

### GE Profile Harmony dryer DPGT750EC/GC

- CleanSpeak™ system communicates with WPGT9360E
- English/Spanish LCD option
- Reversible control panel
- 7.3 cu. ft. king-size capacity
- Dual electronic thermistors
- Separate blower and tumble motors
- Moisture sensor with two sensing bars
- Adaptive cool down
- Fastest premium dryer you can buy!
- King-size opening with double-paned glass window
- Variable heater
- Long venting capabilities up to 150 ft.\*\*
- Stainless steel drum
- Variable end-of-cycle signal
- Six custom cycle settings
- Supreme quiet performance

\*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine, per IEC ratios.

\*\*Of equivalent ducting.

# GE Profile™ washers

	GE Profile			
	WPGT9360E WPGT9350C	WPRB9220D	WPRB9110D	WPRB8050D
<b>Capacity</b>				
Capacity cu. ft.	4.0* king-size	3.5 king-size	3.5 king-size	3.5 king-size
<b>Energy</b>				
ENERGY STAR®	●	●	●	●
<b>Controls</b>				
Electronic	LCD touchscreen display	With icons	●	●
Status indicators	LCD display	LED	LED	LED
Cycle countdown	LCD	LED	●	●
Adaptive capabilities	Water levels	Cycle time	Cycle time	Cycle time
HydroHeater™	● / -			
Water temp system	RightTemp	PerfecTemp Plus	PerfecTemp Plus	PerfecTemp Plus
Wash/rinse temps	4	4	3	3
Water levels	Adaptive fill	5	4	4
SpotSpray			●	●
<b>Wash system</b>				
Wash basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Wash mechanism	Infusor™	GentlePower™ agitator	GentlePower agitator	GentlePower agitator
Wash/spin combinations	Multiple	Multiple	10	6
<b>Drive system</b>				
Variable-speed motor	Direct drive	●	●	
Transmission		Steel	Steel	Steel
Maximum spin speed	1010 RPM	800 RPM	630 RPM	630 RPM
<b>Dispensers</b>				
Bleach	Flow-Thru™ timed	●	●	●
Fabric softener	Flow-Thru timed	●	●	●
Detergent	Flow-Thru timed			
Wash Boost	Flow-Thru timed			
<b>Signals</b>				
End-of-cycle	Variable	Variable	Variable	●
Add bleach	Variable	Variable	Variable	
<b>Wash cycles</b>				
Number of cycles	Multiple	Multiple	Multiple	Multiple
Custom cycles	6	2	2	
<b>Cycle selections</b>				
Whites	●	●	●	●
Colors	●	●	●	●
Dark colors	●	●	●	●
Easy care	●	●	●	●
Handwash	●	Ultra	Ultra	Pulsed
Specialty cycles	Multiple			Casuals - pulsed
<b>Program options</b>				
Stain wash	Stain Inspector™	●	●	
Extra heavy soil	Super Clean			
Heavy soil	●	●	●	●
Medium soil	●	●	●	●
Light soil	●	●	●	●
Extra light soil	●			●
<b>Special cycles</b>				
Delay start	●	●	●	
Speed wash	Quick Clean	●	●	
Prewash	●		●	●
2nd rinse	●	●	●	●
Extended spin	●		●	●
Rinse and spin	●	●	●	●
Spin only	●	●	●	●
<b>Additional features</b>				
Quiet performance	Supreme	Luxury	Luxury	Luxury
HydroView™ glass lid	● / -			
English/Spanish LCD option	● / -			
Color lid instructions	●	●	●	●
<b>Appearance</b>				
Colors available**	PL, WW	WW, CC	WW, CC	WW, CC
<b>Weights &amp; Dimensions</b>				
Approx. shipping weight (lbs.)	155	175	175	175

\*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine per IEC ratios.  
 \*\*PL = Dark Platinum, WW = White on white, CC = Bisque on bisque.

## Washer specifications

### Circuit requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

### Electrical rating:

115V, 60Hz, 10A

### Washer note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.



GE® washers

	GE					
	WCRE6270D	WZRE5260F	WHRE5260E	WHSE5240D	WCSR4170D	WCSR2090D
<b>Capacity</b>						
Capacity cu. ft.	3.5 king-size	3.5 king-size	3.5 King-size	3.2 Super Plus	3.2 Super Plus	3.2 Super
<b>Controls</b>						
Rotary electronic	●	●	●	●	Rotary	Rotary
Status indicators	Status lights	Status lights	Status lights	Status lights		
Water temp system	PerfectTemp	PerfectTemp	PerfectTemp	PerfectTemp		
Wash/rinse temps	3	3	3	3	3	3
Water levels	4	4	4	4	4	3
Spot spray	●					
<b>Wash system</b>						
Wash basket	Stainless steel	Stainless steel	Stainless steel	ExtraAction	ExtraAction	PermaTuf® II
Wash mechanism	GentlePower™ agitator	GentlePower agitator	GentlePower agitator	GentlePower agitator	GentlePower agitator	FlexCare™ agitator
Wash/spin combinations	6	5	5	5	4	2 - pulsed
<b>Drive system</b>						
Transmission	Steel	Steel	Steel	Steel	Steel	Steel
Maximum spin speed	630 RPM	630 RPM	630 RP	630 RPM	630 RPM	630 RPM
<b>Dispensers</b>						
Bleach	●	●	●	●	●	●
Fabric softener	●	●	●	●	●	
<b>Wash cycles</b>						
Number of cycles	27	26	26	24	17	9
<b>Cottons Regular</b>	●	●	●	●	●	Whites
Auto soak (30 min.)	●				●	
Auto soak (15 min.)	●	●	●		●	
Extra heavy soil	●	●	●	●		
Heavy soil	●	●	●	●	●	●
Medium soil	●	●	●	●	●	●
Light soil	●	●	●	●	●	●
Extra light	●					●
<b>Easy Care</b>	●	●	●	●	●	
Auto soak (15 min.)		●	●		●	
Heavy soil	●	●	●	●	●	
Medium soil	●	●	●	●	●	
Light soil	●	●	●	●	●	
Extra light soil					●	
<b>Casuals – Pulsed</b>	●	●	●	●		●
Heavy soil	●	●	●	●		●
Medium soil	●	●	●	●		●
Light soil						●
<b>Delicate</b>	●	●	●	●	●	
Medium soil	●	●	●	●	●	
Light soil				●	●	
Extra light soil					●	
<b>Handwash - Pulsed</b>	●					
Medium soil	●					
Hang to Dry/Prewash		●	●	●		
<b>Special cycles</b>						
Prewash					●	
2nd rinse	●	●	●	●	●	
Extended spin	●	●	●			
Rinse & spin (Quick rinse)	●	●	●	●	●	●
Spin only	●	●	●	●	●	●
<b>Additional features</b>						
Quiet performance	Deluxe	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design
Color lid instructions	●	●	●	●	●	
<b>Appearance</b>						
Colors available*	WW, CC	GG	WW, CC	WW, CC	WW, CC	WW, CC
<b>Weights &amp; Dimensions</b>						
Approx. shipping weight (lbs.)	175	160	160	160	160	160

\*WW = White on white, GG = Granite Gray, CC = Bisque on bisque.

Washer specifications

Circuit requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical rating:

115V, 60Hz, 10A

Washer note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

# GE Profile™ and GE dryers

Electric Gas	GE Profile				GE					
	DPGT750EC DPGT750GC	DPSB620EC DPSB620GC	DPSB619ED DPSB619GD	DPSB613ED DPSB613GD	DRSR483ED DRSR483GD	DLSR483EE DLSR483GE	DZSR483EF DZSR483GF	DWXR483EB DWXR483GB	DBXR463ED DBXR463GD	DJXR433EC DJXR433GC
<b>Capacity</b>										
Capacity cu. ft.	7.3 king-size	7.0 king-size	7.0 super	7.0 super	7.0 super	7.0 super	7.0 super	6.0 extra-large	6.0 extra-large	6.0 extra-large
<b>Controls</b>										
Electronic	●	●	●	●	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Status indicators	LCD	LED	LED	LED						
Cycle countdown	LCD	LED	LED	LED						
Adaptive logic	●	●	●	●						
Heat selections	5	5	5	5	4	4	4	4	4	4
<b>Dry system</b>										
Clothing moisture sensor	DuoDry™	Sensor Dry Plus	Sensor Dry Plus	Sensor Dry Plus						
Temperature sensor	Thermistors	Thermistors	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Dryer drum	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	DuraDrum™	DuraDrum	DuraDrum	DuraDrum	DuraDrum
Drum baffles	Dark Platinum	White	White	White	White	White	White	White	White	White
Dual motors	●									
<b>Signals</b>										
End-of-cycle	Variable	Variable	Variable	Variable	Variable	Variable	Variable	Variable	Fixed	
Damp dry		Variable	Variable							
<b>Dry cycles</b>										
Number of cycles	Multiple	Multiple	Multiple	Multiple	8	8	8	8	6	3
Custom cycles	6	2	2							
<b>Cycle selections</b>										
Cottons	●	●	●	●	●	●	●	●	●	●
Mixed loads	●	●	●	●						
Easy care	●	●	●	●	●	●	●	●	●	●
Knits sweaters	●	●	●	●						
Delicates	●	●	●	●						
Specialty cycles	Multiple									
<b>Program options</b>										
More dry	●	●	●	●						
Dry	●	●	●	●						
Less dry	●	●	●	●						
Damp dry	●	●	●	●	●	●	●	●	●	●
<b>Timed dry</b>										
Time control	Electronic	Electronic	Electronic	Electronic	80	80 min.	80 min.	80 min.	80 min.	60 min.
<b>Special cycles</b>										
Speed dry		●	●							
Antibacterial cycle		●	●							
Dryel® cycle	●	●	●							
Delay start	●	●	●							
Add time option	●	●	●	●						
Dewrinkle	●	●	●	●	●	●	●	●	●	●
Quick Fluff (no heat)	●	●	●		●	●	●	●	●	
Warm up	●		●							
<b>Additional Features</b>										
Quiet performance	Supreme	Luxury	Luxury	Luxury	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design
Quiet drum	●	●	●	●						
Deluxe dryer rack	●	●	●	●			●			
Dryer interior light	●	●	●	●	●	●	●	●	●	
Extended venting capability	Up to 150 ft.				Up to 150 ft.	Up to 150 ft.				
Clean lint filter reminder	●	●	●	●						
English/Spanish LCD option	●									
<b>Appearance</b>										
Colors available*	PL, WW	WW, CC	WW, CC	WW, CC	WW, CC	WW	GG	WW, CC**	WW, CC	WW, CC
<b>Weights &amp; Dimensions</b>										
Approx. shipping weight-elec. (lbs.)	155	122	125	125	119	120	112	112	112	112
Approx. shipping weight-gas (lbs.)	155	127	129	129	125	125	115	115	115	115

\*PL = Dark Platinum, WW = White on white, GG = Granite Gray, CC = Bisque on bisque.

\*\*DWXR483GB available in White on white only.



Listed by  
Underwriters  
Laboratories

## Front-loading washers

	GE Profile™	GE®
	WPXH214A	WSXH208A
<b>Capacity</b>		
Capacity	Extra-large	Extra-large
Cubic feet	3.1 IEC	3.1 IEC
<b>Features</b>		
ENERGY STAR®	●	●
Total water usage	Approx. 25 gallons maximum	Approx. 25 gallons maximum
Wash/rinse temperatures	7	4
Water levels	Auto. adjustment	Auto. adjustment
Standard rinse cycles	4	3
Motor speeds	Variable	Variable
ColorLogic™	●	●
Combinations*	HC, WW, WC, CC	HC, WW, WC, CC
Detergent dispenser (liquid/powder)	●	●
Bleach dispenser	●	●
Fabric softener dispenser	●	●
End-of-cycle signal	Fixed	Adjustable
Final spin/speed selections	4	Automatic
Number of wash cycles	14	8
Cotton		
Heavy Soil	●	●
Medium Soil	●	●
Light Soil	●	●
Easy Care		
Medium Soil/Perm. Press	●	●
Light Soil/Wrinkle Free	●	●
Delicates/Ultra Care	●	●
Pre-Wash		●
Quick Wash	●	●
Extra-Rinse Cycle/Auto Option	3	2
Max. spin speed	950	850
AutoTemp	●	●
Noise package	Deluxe	Standard
Leveling legs	●	●
Stainless steel wash basket	●	●
Pedestal available at additional cost	FPDW1 (12"H x 27"W x 24-3/8"D)	
<b>Appearance</b>		
Colors available	White on white, Bisque on bisque	White on white
<b>Weights &amp; Dimensions</b>		
Approx. shipping weight (lbs.)	217	217
Flexible installation	Undercounter, stacked, side-by-side	

\*HC = Hot-Cold, WW = Warm-Warm, WC = Warm-Cold, CC = Cold-Cold.

## Front-loading dryers

	GE Profile	GE
	DPXH46EA/GA	DSXH43EA/GA
<b>Capacity</b>		
Capacity	Extra-large	Extra-large
Cubic feet	5.7	5.7
<b>Features</b>		
Tumble drying	●	●
Time dry cycles	1	1
Auto dry cycles	5	2
Sensor Dry	●	●
ColorLogic	●	●
Temperature options	4	4
Regular/Cottons	●	●
Medium/Perm. Press	●	●
Low/Delicates	●	●
Air Fluff/No Heat (Cool Down)	●	●
Wrinkle Care cycle	2	●
Moisture sensor	●	●
Drying rack	●	●
Auto Dry Cycles		
Cottons	●	●
Easy Care	●	●
Knits/Delicate	●	●
Cool Down	●	●
Quick clean lint screen	●	●
End-of-cycle signal	Fixed	Adjustable
Dryer interior light	●	●
Reverse-A-Door	●	●
Dura finish top and drum	●	●
Spill-Saver top	●	●
Poly tumbling vanes	●	●
Leveling legs	●	●
100% front serviceable	●	●
Exhaust options (Electric/Gas)	4/3	4/3
Heavy-duty suspension system	●	●
Pedestal available at additional cost	FPDW1 (12"H x 27"W x 24-3/8"D)	
<b>Appearance</b>		
Colors available	White on white, Bisque on bisque	White on white
<b>Weights &amp; Dimensions</b>		
Approx. shipping wt. (Elec/Gas) (lbs.)	116	116
Flexible installation	Undercounter, stacked, side-by-side	
LP conversion kit	WE25X10016	WE25X10016

## Dryer specifications

**Exhaust options:**  
**Electric:** 4-way via rear, right, left and bottom.  
**Gas:** For 5.7 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, right and bottom. Dryer is shipped exhausted to the rear.  
 Exhaust Elbow Kit: Order Pub. No. 14-A018.  
**Electrical requirements:**  
 240V, 3 Wire, 5600W, 24A, 60 Hz  
 208V, 3 Wire, 4400W, 22A, 60 Hz  
**Gas requirements:**  
 120V, 60 Hz, 6A  
**See Pub. No. 49-9963-2 for installation information.**

## Spacemaker®—portable/stationary models

Individual Spacemaker washers	GE®	
	Stationary WLSL1100D	Portable WSLP1100D
<b>Capacity</b>		
Capacity	2.5 extra-large	2.5 extra-large
<b>Features</b>		
Wash/spin speed combinations	1	1
Wash/rinse temperatures	3	3
Water levels	4	4
Number of cycles	10	10
Cycle countdown	Digital	Digital
Regular		
Heavy Soil	●	●
Medium Soil	●	●
Perm. Press		
Medium Soil	●	●
Light Soil	●	●
Delicates	●	●
Spin only	●	●
One-touch load sensing	●	●
Automatic cool down	●	●
Bleach dispenser	●	●
Fabric softener dispenser	●	●
Automatic detergent dispenser	●	●
Lint filter	2 Removable	2 Removable
Washer lid type	Bifold	Bifold
Quiet pump	●	●
Easy-roll rollers		●
Unicouple connector		●
Basket material	Stainless steel	Stainless steel
<b>Appearance</b>		
Colors available*	WW	WW
<b>Weights &amp; Dimensions</b>		
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps	
Dimensions	37-1/2" x 23-5/8"	38 x 23-5/8"
Approx. shipping wt. (lbs.)	114	116

\*Colors available: WW = White on white.  
 \*\*Depth measured from front of control knob.  
 †With leveling legs extended.

Individual Spacemaker dryers	GE	
	DSKS433EB	DSKP333EC* DSKS333EC
<b>Capacity</b>		
Capacity (cu. ft.)	3.6	3.6
<b>Features</b>		
Dry control	Automatic	Automatic
Heat selections	4	3(timer)
Number of dry cycles	3	3
Auto. Perm. Press & Delicate	●	●
Auto. Reg.	●	●
Timed Regular (min.)	140	150
Air Fluff (min.)	(Heat selection)	30
Separate start switch	●	●
Control location	Mid-band	Top Mid-band
Lint filter	Upfront	Upfront
<b>Appearance</b>		
Colors available**	WW, WH	WW
<b>Weight &amp; Dimensions</b>		
Exhaust options***	4-way	4 way - rear, bottom, left, right 4 way - rear, top, left, right
Circuit requirements	240/208V†, 60 Hertz, 30 Amp	120V, 60 Hertz, 15 Amp
Power cord	No Cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	33-1/4 x 23-7/8 x 24-1/2
Wall-mount kit (available at additional cost)	WMK-35	WMK-35
Approx. shipping wt. (lbs.)	108	108

\*DSKP333EC dryer comes equipped with casters and stationary leveling legs.  
 \*\*Colors available: WW = White on white, WH = White with black controls.  
 \*\*\*DSKS433EB and DSKS333EC are shipped exhausted through the top.  
 †Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp) DSKS433EB and DSKS333EC approved for use with washer/dryer stack rack DSDR24D.  
**Circuit requirements:** An individual, properly grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

# Unitized GE Spacemaker washers and dryers

	GE			
	WSM2700D		WSM2420D	
Electric	WSM2780D		WSM2480D	
Gas	Washer	Dryer	Washer	Dryer
<b>Capacity</b>				
Capacity	Extra-large	Extra-large	Compact	Compact
<b>Features</b>				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	●		●	
Perm. Press	●		●	
Delicates	●		●	
Unbalanced load control	●		●	
Lint filter	●		●	

<b>Dryer</b>			
<b>Features</b>			
Automatic dry control		●	●
Number of dry cycles		4	4
Auto Regular		●	●
Auto Perm. Press			●
Delicates		●	
Timed		●	●
Air Fluff		●	●
Control location		Mid-band	Mid-band
Exhaust options		Rear	Rear/Sides
<b>Appearance</b>			
Colors available*	WW, CC WW		WW, CC WW
<b>Weights &amp; Dimensions</b>			
Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16**		71-3/4 x 23-7/8 x 27-1/4**
Approx. shipping wt. (lbs.)	300		238

\*WW = White on white, CC = Bisque on bisque  
 \*\*Depth dimension assumes water hook-up is recessed in the wall.  
 Note: The third prong on the WSM2780D plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

## Electrical requirements for unitized Spacemaker dryers

**WSM2700D: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

**WSM2420D: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.

**NOTE:** THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

**WSM2480D: Gas dryer**—This appliance should be connected to an individual, properly grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15- or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

**Gas rated** input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

**WSM2780D: Gas dryer**—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

**Gas rated** input 20,000 BTU/HR. Factory equipped for natural gas.

**LP gas supply requires a conversion kit.**

Kits: WSM2780D—WE25X206

WSM2480D—WE25X0219

Have a qualified gas technician install a conversion kit before use.

# Commercial front-loading washer

GE	
WCCH404VWW	
<b>Capacity</b>	
Capacity (cu. ft.)	16 pound (2.7–3.1 per IEC)
<b>Features</b>	
Efficiency	ENERGY STAR® -rated
Reverse wash action	●
Total water usage	Approx. 25 gallons maximum
Wash/rinse temp.	3/1
Automatic water levels	●
Wash program	Standard wash + 3 rinses (26 min., excl. fill times)
Wash options	
Color Cottons	●
Permanent Press	●
White Cottons	●
Delicates	●
Extraction	850rpm/210 G's
Automatic dispensing opt.	Detergent, liquid bleach, fabric softener
Suspension	Soft Mount
Drain pump	13 gpm @ 36 in head
Leveling system	Front leveling legs/rear rollers
Wash basket	Stainless steel
Door style	Glass
<b>Appearance</b>	
Colors available	White
Control panel	Brushed alum./black/burgundy
<b>Weights &amp; Dimensions</b>	
Dimensions (HxWxD inches)	36 x 26-3/4 x 24-3/4 (without coin box)
Approx. shipping weight (lbs.)	217
<b>Power Ratings</b>	
Electrical requirements	120v, 60hz, 12.0 amps

**Note:** Coin box is preassembled to the washer. Includes accumulator. Coin slides, drops, or smart card accessory must be ordered from supplier separately.

## Commercial front-loading matching dryer

		GE®
		DCC443EA/GA
<b>Capacity</b>		
Capacity (cu. ft.)		Extra-large (5.7)
<b>Features</b>		
Heat selections		3
Dry cycles		3
High Heat		●
Medium Heat		●
Low Heat		●
Lockable lint filter		●
Door swing		Reversible
Drum finish		White DuraDrum™
Front serviceable		●
<b>Appearance</b>		
Colors available		White
Control panel		
		Brushed alum./black/burgundy
<b>Weights &amp; Dimensions</b>		
Approx. shipping weight (lbs.)	Elect.	116
	Gas	116

## Commercial Smart Card washers and dryers

		GE washer
		WNCK2050D
<b>Capacity</b>		
Capacity (cu. ft.)		Extra-large (2.7)
<b>Features</b>		
Motor speed		2
Wash/spin speed comb.		3
Wash/rinse temperatures		3
Water levels		Adjustable
Digital cycle countdown		●
Number of wash cycles		5
White cottons		●
Colored cottons		●
Bright colors		●
Permanent Press		●
Delicate		●
Quiet performance		●
Lid instructions		●
LED indicators		●
<b>Smart Card features</b>		
Reader		ESD
Alphanumeric display		●
Control card		●
<b>Appearance</b>		
Colors available		White
Control panel		
		Brushed aluminum/black/burgundy
<b>Weights &amp; Dimensions</b>		
Approx. shipping wt. (lbs.)		170

		GE dryer
		DNCK440EA/GA
<b>Capacity</b>		
Capacity (cu. ft.)		Super (7.0)
<b>Features</b>		
Heat selections		4
Dry cycles		4
High Heat		●
Medium Heat		●
Low Heat		●
Cool down		w/high heat
Digital cycle countdown		●
Quiet performance		●
Lockable lint filter		●
LED indicators		●
Door swing		Reversible
Drum finish		White DuraDrum
<b>Smart Card features</b>		
Reader		ESD
Alphanumeric display		●
Control card		●
<b>Appearance</b>		
Colors available		White
Control panel		
		Brushed aluminum/black/burgundy
<b>Weights &amp; Dimensions</b>		
Approx. ship. wt. (lbs.)	Elect.	130
	Gas	125

## Stacked commercial dryers

		GE dryers
		DDC4400S
		DDC4500S
<b>Capacity</b>		
Capacity (cu. ft.)		Large (5.4)
<b>Features</b>		
Automatic Dry Control		●
Upfront lint filter		●
Heat selections		3
Number of cycles		3
Cottons		●
Permanent Press		●
Delicates/Synthetic/Knits		●
100% front serviceable		●
Reverse-A-Door		●
Heavy-duty 1/4 HP motor		●
<b>Appearance</b>		
Colors available		White
<b>Weight &amp; Dimensions</b>		
Approx. shipping wt. (lbs.)	Electric	275
	Gas	274
Stacked (HxWxD in inches)		77 x 27 x 27

### Exhaust options:

**Electric:** 3-way venting: left, right, or rear. Maximum recommended exhaust duct length is 25 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.  
**Gas:** 2-way venting: left or rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap.  
 Dryer is shipped with exhaust to the rear. (See Installation Instructions.)

### Circuit requirements:

**Electric:** An individual branch circuit fused for 30 amps is required for each dryer.

**Electric dryer rating:** 240V, 60Hz, 5600W, 24A 208V, 60Hz, 4400W, 22A  
 A special 208-volt heater, part number WE11X0101, is available to reduce drying time in 208-volt installations.

**Gas:** An individual branch circuit, properly grounded for a 3-prong outlet, fused for 15 or 20 amp, is required for each dryer.

### Gas dryer rating:

**Gas (BTU/Hr):** Maintains thermostatically controlled heat flow to dry clothes gently. Longer cool-down period on Permanent Press cycle helps prevent heat-set wrinkles. Separate thermostat controls lower temperatures for Knit cycle drying. Factory equipped for natural gas. Tested for LP gas. A conversion kit, WE25X0217, is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install the conversion kit.

**See Pub. No. 31-1723 for DDC4400D and Pub. No. 31-1724 for DDC4500D installation instructions.**

**Note:** Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.  
**Note:** Wall anchor chain provided for gas models only.

# Commercial washers and dryers

	GE washers			
	WCCB1030D	WCCD2050D	WCRD2050D	WLCD2050D
<b>Capacity</b>				
Capacity (cu. ft.)	3.2	3.2	3.5	3.2
<b>Features</b>				
Wash time (excludes fill)	24 min.	24 min.	24 min.	31.5 min.
Water usage	29,32/35 gal.	29,32/35 gal.	29,32/35 gal.	29,32/35 gal.
<b>Controls</b>				
Coin box/card reader	Box shipped attached	Box shipped attached	Box shipped attached	Box shipped attached
Coin slide/dropbox/card reader	Customer-supplied	Customer-supplied	Customer-supplied	Customer-supplied
Display		LED	LED	LED
Control type	Pushbutton	Pushbutton w/ LED countdown	Pushbutton w/ LED countdown	Pushbutton w/ LED countdown
Cycle indicator lights	●	●	●	●
<b>Washing features</b>				
Wash/rinse temperatures	3	3	3	3
Wash/spin speed combinations	1	2	2	2
Motor speeds	1	2	2	2
Water levels	3 - adjustable	3 - adjustable	3 - adjustable	3 - adjustable
Agitator type	GentlePower™	GentlePower	GentlePower	GentlePower
Wash basket type	ExtrAction™	ExtrAction	Stainless steel	ExtrAction
Number of wash cycles	3	5	5	5
<b>Cycles</b>				
Whites/cotton regular	●	●	●	●
Colors/cotton		●	●	
Bright colors		●	●	
Permanent press	●	●	●	●
Delicates cycle	●	●	●	●
<b>Unit features</b>				
Color lid instructions	●	●	●	●
Lid opening	Rear	Rear	Rear	Rear
100% front serviceable	●	●	●	●
Armor guard protection	●	●	●	●
Steel drive transmission	●	●	●	●
Galvanized/E-coated steel	●	●	●	●
Auto balance suspension system	●	●	●	●
Spin speeds	630 RPM	630 RPM	630 RPM	630 RPM
Front leveling legs/rear self leveling system	●	●	●	●
Drain pump	TURBO 8-ft	TURBO 8-ft	TURBO 8-ft	TURBO 8-ft
<b>Appearance</b>				
Colors available	White/Bisque	White/Bisque	White	White
<b>Weights &amp; Dimensions</b>				
Approx. shipping weight (lbs.)	174	174	190	174
Dimensions (HxWxD in inches)	← 42 x 27 x 25-1/2 →			

Electric Gas	GE Dryers	
	DCCB330ED	DCCD330ED
	DCCB330GD	DCCD330GD
<b>Capacity</b>		
Capacity (cu.ft.)	Super Plus (7.0)	Super Plus (7.0)
<b>Features</b>		
<b>Control</b>	<b>Coin-op</b>	<b>Coin-op</b>
Coin box/card reader	Box shipped attached	Box shipped attached
Coin slide/drop box/card reader	Customer-supplied	Customer-supplied
Display		LED
Control type	Pushbutton	Pushbutton w/LED count down
Cycle indicator lights	●	●
<b>Heating features</b>		
Heats	3	3
Lint filter	Upfront	Upfront
Dryer baffles/paddles	Plastic	Plastic
Dryer drum type	Painted	Painted
Number of dry cycles	3	3
<b>Cycles</b>		
Whites/cottons/mixed loads	●	●
Knits/synthetics/delicates cycle	●	●
Permanent press	●	●
<b>Unit features</b>		
Quiet package	Quiet-By-Design™	Quiet-By-Design
Door opening	Reversible	Reversible
100% front serviceable	●	●
Armor guard protection	●	●
Galvanized steel cabinet	●	●
Leveling system	4-leg adjustable	4-leg adjustable
Electric-vent positions	4 way - rear, bottom, left, right 3 way-rear, bottom & left viewed from front	4 way - rear, bottom, left, right 3 way-rear, bottom & left viewed from front
Gas-vent positions		
<b>Gas requirements</b>		
Gas rate	22000 BTU/Hr	22000 BTU/Hr
Type	Natural gas	Natural gas
Options	LP kit available	LP kit available
Ignition	Glo-Bar	Glo-Bar
<b>Appearance</b>		
Colors available	White/Bisque	White/Bisque
<b>Weights &amp; Dimensions</b>		
Approx. shipping wt. electric (lbs.)	125	125
Approx. shipping wt. gas (lbs.)	135	135
Dimensions (HxWxD in inches)	← 42 x 27 x 25-1/2 →	

## Non-coin-op commercial washers and dryers

GE washer	
WNRD2050D	
<b>Capacity</b>	
Capacity (cu. ft.)	3.5 stainless steel
<b>Features</b>	
Motor	2-speed
Wash/spin speed combinations	3
Wash/rinse temperatures	3
Water levels	4
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Spin only	●
Bleach dispenser	●
Fabric softener dispenser	●
Quiet performance	Deluxe quiet
Lid instructions	●
LED indicators	●
<b>Appearance</b>	
Colors available	White
<b>Weights &amp; Dimensions</b>	
Approx. shipping wt. (lbs.)	160

GE dryer	
DNCD450EA/GA	
<b>Capacity</b>	
Capacity (cu. ft.)	Super (7.0)
<b>Features</b>	
Dry cycles	5
Cottons/high heat	●
Mixed loads/high heat	●
Perm. press/medium heat	●
Knits/low heat	●
Delicates/extra low heat	●
Temperatures	4
Air dry	●
Digital cycle countdown	●
Quiet performance	Hush quiet
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum material	White DuraDrum
<b>Appearance</b>	
Colors available	White
<b>Weights &amp; Dimensions</b>	
Approx. shipping wt. (lbs.)	125

### Energy saving:

All wash cycles include energy-saving cold water rinse. Total cycle time—24 minutes plus fill time. Actual wash time is 8 minutes with a final spin speed of approximately 630 RPM.

### Circuit requirement:

An individual, properly grounded 15- or 20-amp branch circuit is required.

### Electrical rating:

115V, 60Hz

See Pub. No. 31-15400 for installation instructions.

**Note:** Coin slide or coin drop, coin vault, and locks for cover and meter case access door are not provided with washer.

### Exhaust options:

**Electric:** 4-way venting: left, right, bottom and rear. Maximum recommended exhaust duct length is 45 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.

**Gas:** 3-way venting: left, bottom and rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap. Dryer is shipped with exhaust to the rear. (See Installation Instructions.)

See Pub. No. 31-1746 for installation instructions.

### Circuit requirements:

**Electric** An individual branch circuit fused for 30 amps is required for each dryer.

### Electric dryer rating:

240V, 60Hz, 5600W, 24A  
208V, 60Hz, 4400W, 22A

**Gas:** An individual branch circuit fused for 15 or 20 amps is required for each dryer.

**Gas dryer rating:** 120V, 60Hz

**Gas (BTU/Hr):** 20,000. Factory equipped for natural gas. Tested for LP gas. A conversion kit is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install

the conversion kit. Equipped with energy saving Glo-Bar ignition.

**Dryer note:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

**Note:** Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

# The first clothes care system with washer and dryer communication just got smarter

## Washer



### Big Capacity

**King-size, 4.0 cu. ft. stainless steel basket**—the largest-capacity washer available. Which means up to 110 fewer loads per year.\*



### Big Savings

**HydroWash™ system** achieves front-load wash performance with topload convenience. Saves up to 14 gallons of water per average load\*\* and up to a 90% improvement of the energy factor.\*\*\*



### Big Results

**Stain Inspector™ system** is the most comprehensive stain removal system available.†

## Dryer




### Big Capacity

**King-size, 7.3 cu. ft. stainless steel drum**—combines with the Harmony washer to create the largest-capacity laundry pair available. It handles king-size items and family-size loads.



### Big Savings

**Fastest premium dryer** you can buy—uses computer-controlled heating to deliver speed and accuracy, saving you time and effort.

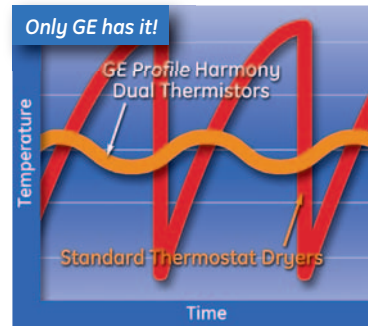

### Big Results

**DuoDry™ system** with dual motors and dual electronic thermistors for consistent heat and better clothes care.

\*At full IEC capacity and 10 loads per week, compared to a super capacity machine, WWSE5240.  
\*\*Compared to a typical topload washer, WWSE5240D.  
\*\*\*Model WPGT9360 compared to the MEF requirement of the DOE Energy Standard.  
†Based on number of stains treated, automatic settings matching soil, fabric type and color.



## A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

**GE Consumer & Industrial Appliances**  
General Electric Company  
Louisville, KY 40225  
ge.com

Before purchasing an ENERGY STAR®-qualified appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or at ge.com.

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2005 GE Company  
Pub. No. 24-C695 PC39864