

# SCB2001K

## GE Profile Advantium® Wall Oven

### Dimensions and Installation Information (in inches)


<b>A</b>	Allow 1" overlap of oven over top and bottom edges of cutout
<b>B</b>	Allow 11/16"-3/4" for overlap of oven over side edges of cutout

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Most 30" Wall Cabinets can be used with this unit.**

**Note:** 2" minimum between cutouts when installed above warming drawer or single wall oven.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

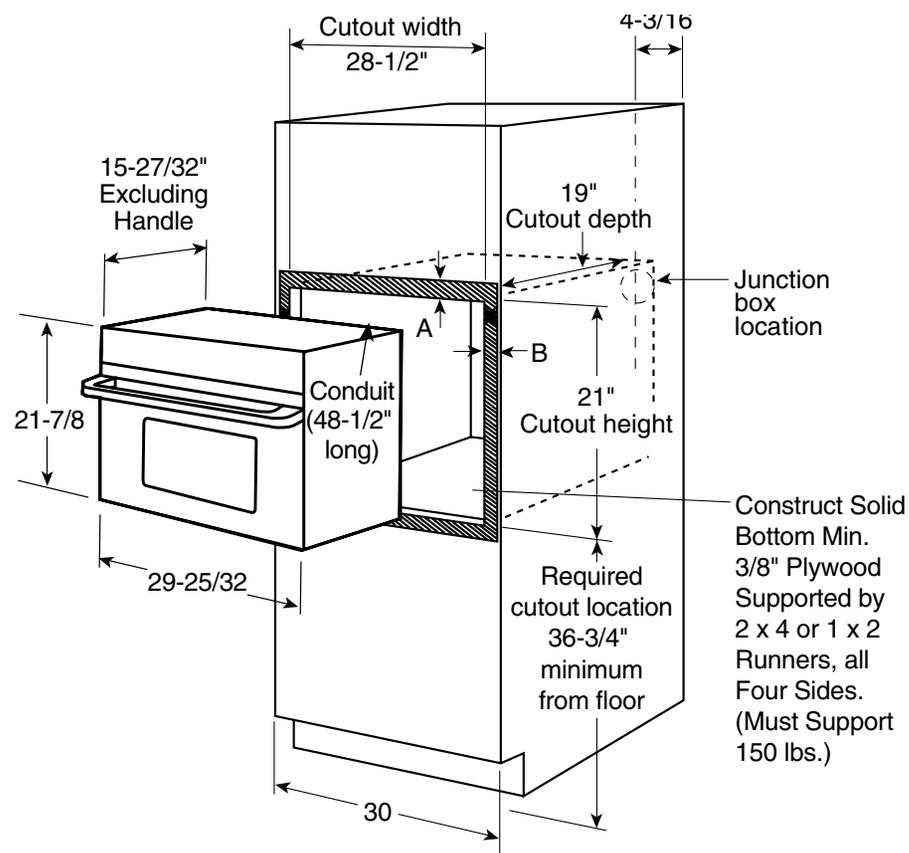

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.



# SCB2001K

## GE Profile Advantium® Wall Oven

### Dimensions and Installation Information (in inches)

Order a 30" wide single oven cabinet or cut the opening in a wall to dimensions shown.


**Note:** The rough opening must be:

- Depth – 19" Min.
- Width – 28-1/2" Min.
- Height – 21" Min.
- 36-3/4" from the floor to the cutout is required.
- These ovens require 3/4" overlap on each side, top and bottom of the cutout.
- Oven overlaps will conceal cut edges on all sides of the opening.

**Note:** For installation above a warming drawer additional clearance between the two cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior 23-1/2" depth and 9-1/4" height.


**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

**Single Speedcook Installation**

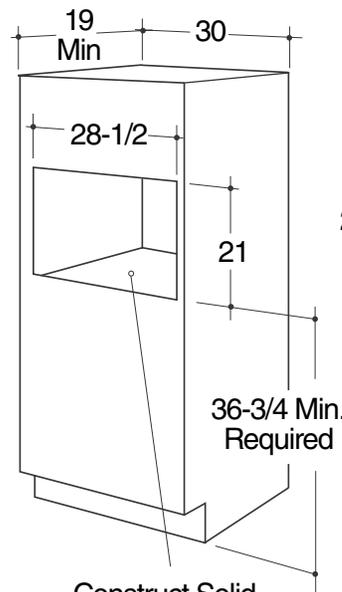

Construct Solid Bottom Min. 3/8" Plywood Supported by 2 x 4 or 1 x 2 Runners, all Four Sides


**Speedcook Oven Installation above a GE Warming Drawer**

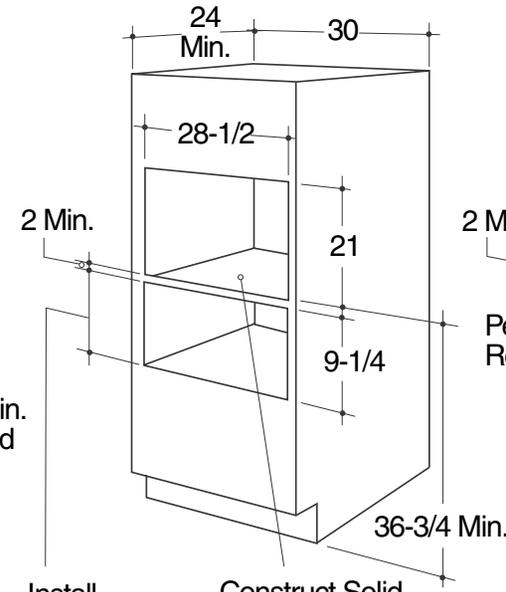

Install 2 x 4 or 2 x 2 Runners or Solid Bottom, Must Support 100 lbs.

Construct Solid Bottom Min. 3/8" Plywood Supported by 2 x 4 or 1 x 2 Runners, all Four Sides

**Speedcook Oven Installation above a single GE Built-In Wall Oven**

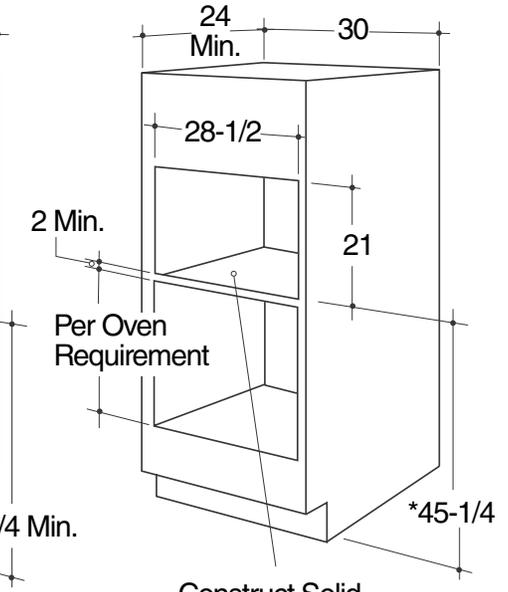

Construct Solid Bottom Min. 3/8" Plywood Supported by 2 x 4 or 1 x 2 Runners, all Four Sides

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.




# SCB2001K

## GE Profile Advantium® Wall Oven

### Features and Benefits

- Speedcook Technology – Delivers oven-quality food up to eight times faster than a conventional oven
- Multiple Cooking Modes – Bakes, broils, browns, roasts, microwaves and grills fast, with no preheating
- Over 100 Pre-Programmed Menu Items, Manual Cook, Help and Demo Modes
- Sensor Cooking Controls – Automatically adjust the time and power for exceptional cooking results
- Auto and Time Defrost – Automatically defrosts for a specified amount of time
- Halogen Interior Light – Helps you monitor food as it cooks
- Two-Line Bilingual Scrolling Display – Provides helpful cooking tips and oven-use instructions in easy-to-read English or Spanish
- Stainless Steel Interior – Durable surface that cleans quickly with a simple wipe of the towel
- Model SCB2001KSS – Stainless steel

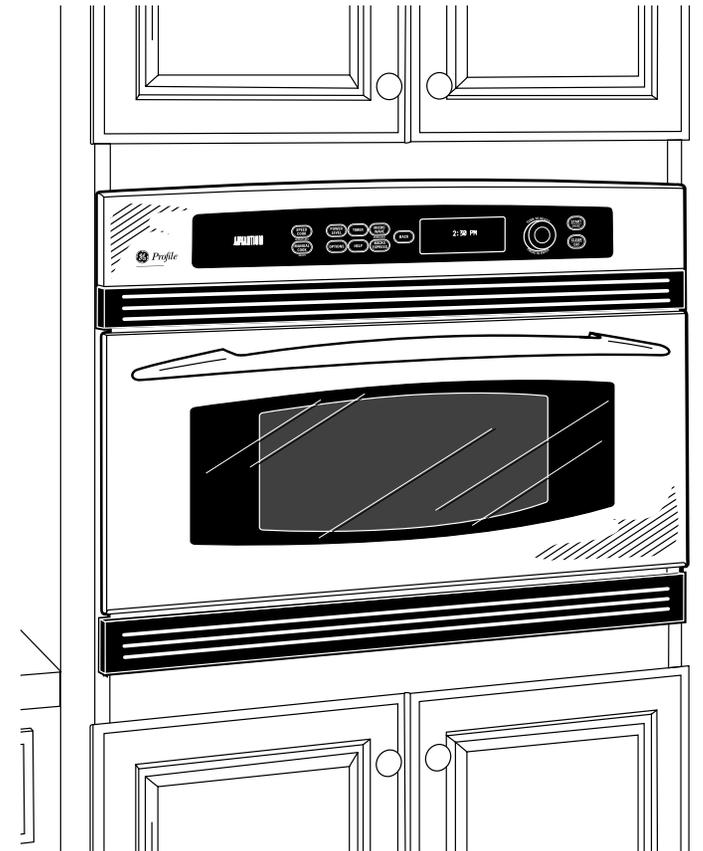

imagination at work