GLD4408/4458/4468R GE® Tall Tub Built-In Dishwasher

Dimensions and Installation Information (in inches)

Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	10
Calrod® heater watts max	


For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.


Note: The rough cabinet opening must be at least 24" deep, 24" wide and approximately 34-1/2" high from floor to underside of the countertop. Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. The power cord and connections must comply with the National Electrical Code Section 422 and/or local codes and ordinances. The cord must be no longer than 6 ft. from the junction box to the receptacle.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



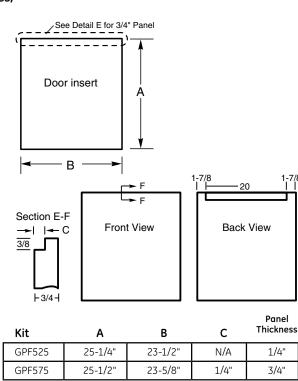

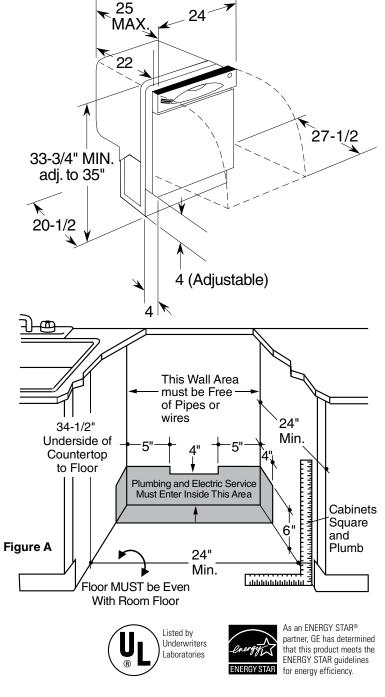

GLD4408/4458/4468R GE® Tall Tub Built-In Dishwasher

Features and Benefits

- PureClean wash system with 5-stage filtration Multiple filtration levels ensure that soils are nowhere near clean dishware
- ENERGY STAR[®] Qualified Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings
- SaniWash cycle Special cycle reduces 99.999% of harmful germs and bacteria
- Pearl blue nylon deep-tiered rack Durable racks are designed to resist rust and secure dishes
- Dedicated silverware jets Precisely dedicated spray jets target the silverware for optimal cleaning
- Electronic controls with 3 cycles/4 options Modern controls make it easy to program the dishwasher
- QuietPower™57 sound package 57 dBA Advanced materials reduce the sound level to just 57 dBA
- 15 place setting capacity Dishwasher can handle up to 15 place settings in a single load
- Model GLD4408RWW White on white
- Model GLD4408RBB Black on black
- Model GLD4458RCS CleanSteel™
- Model GLD4468RSS Stainless steel

