## PDWT400/480P GE Profile™ Dishwasher with SmartDispense™ Technology

Dimensions and Installation Information (in inches)


**Electrical Rating** 

Voltage AC	120
Hertz	60
Total connected load amperage	9.1
Calrod® heater watts max	875

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

†† Add 1/2" for deepest part of contour door. Allow an additional 2" for the handle on PDWT500/PDWT400/PDWT200 Series models.

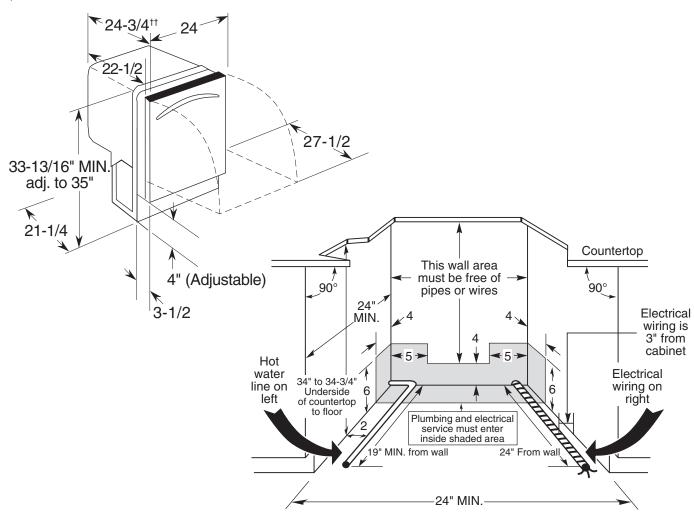

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.









As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

## PDWT400/480P

## GE Profile™ Dishwasher with SmartDispense™ Technology

## Features and Benefits

- SmartDispense<sup>™</sup> Technology Holds up to 47 fl. oz. of detergent and dispenses it based on water hardness and soil levels
- 6-level BrilliantClean™ Towerless Wash System Multiple wash levels help to remove tough food soils from dishes
- CleanSensor<sup>™</sup> A laser measures soil and water temperature to adjust to the ideal cycle time and optimize water usage
- Giant Tub with up to 16 Place Setting Capacity Nylon Racking Holds tall and oversized items and washes up to 16 place settings at once
- 2 Sets of Fold-Down Tines in Lower Rack Flexible tines make it easier to load the dishwasher
- 2/4/8-Hour Delay Start Allows the dishwasher to be set to wash dishes at a later time
- Hand/Gentle Cycle Gently cleans delicate items that would normally require handwashing
- Model PDWT480PSS Stainless steel (shown)
- Model PDWT400PWW White on white
- Model PDWT400PBB Black on black

