## PSW26PSW

# GE Profile™ ENERGY STAR® 25.5 Cu. Ft. Stainless-Wrapped Side-by-Side Refrigerator

#### Dimensions and Installation Information (in inches)

Overall Dimensions	Height to top of hinge (in.) A	70-1/2*
	Height to top of case (in.) <b>B</b>	68-3/4
	Case depth without door (in.) <b>C</b> <sup>†</sup>	28-1/2
	Case depth less door handle (in.) <b>D</b> <sup>†</sup>	32-3/4
	Case depth with door handle (in.) <b>E</b> <sup>†</sup>	35-3/8
	Depth with fresh food door open 90° (in.) F <sup>†</sup>	50-9/16
	Width (in.) <b>G</b>	36
	Width with door open 90° less door handle (in.) <b>H</b>	42-3/8
Air Clearances	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	1

<sup>\*</sup>When cap is removed: 69-1/4"

†Water hook-up fits in back air clearance when calculating installation depth.


If installed against a wall, allow clearance of 14-3/16" on freezer side to remove bin.


Clearance required to remove fresh food full-size pan without disassembling is 18-15/16".

Allow additional space for any necessary leveling adjustments.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.













## PSW26PSW

## GE Profile™ ENERGY STAR® 25.5 Cu. Ft. Stainless-Wrapped Side-by-Side Refrigerator

### To Remove Top Caps and Doors on PSW26PSW

Step 1: the refrigerator. Remove two screws, one on each side at the rear of the top cap. Lift off and remove top cap.

Step 2: Open both doors. Remove one screw on each side of the toekick. Pull forward to remove toekick.

Step 3: On the freezer door, disconnect water line coupler by pushing against the collar on the left side. Disconnect wire harness.


Step 4: Use a Torx T-20 screwdriver to remove 2 screws holding the top hinge. Carefully remove hinge while supporting door. Lift door up and off bottom hinge. Remove fresh food door in the same manner. Note: Do not remove bottom hinges! Door alignment will be difficult if bottom hinges are removed.

Step 5: Place refrigerator onto a hand truck, upright and against one side. Move refrigerator to the installation location.

Step 6: Carefully lower doors onto bottom hinges. Be sure to route the tubing and electrical connector through the bottom hinge. Reinstall top hinges.

Step 7: Place cap over the top of the refrigerator. Reinstall the original screws in the top and back of the cap.

Step 8: Reconnect the wiring harness and waterline.

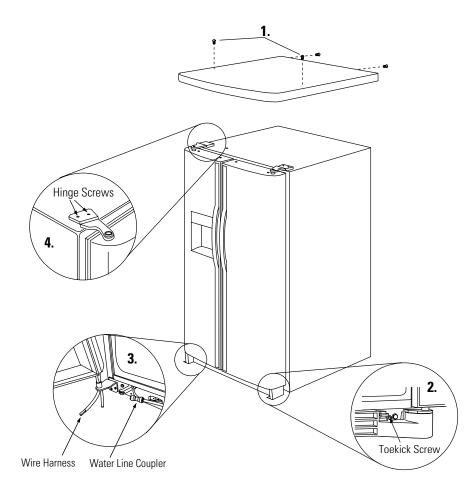

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.










As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

## PSW26PSW

## GE Profile™ ENERGY STAR® 25.5 Cu. Ft. Stainless-Wrapped Side-by-Side Refrigerator

#### **Features and Benefits**

- Stainless-Wrapped Exterior with Hidden Hinge and Top Bevel Provides a consistent appearance with other appliances and includes contoured doors with a concealed hinge
- ClimateKeeper2™ System Keeps food garden fresh longer, while protecting ice from odor transfer, with its unique dual-evaporator system
- Color LCD Controls with Touch Screen Makes it easy to control all the functions of the refrigerator with just a touch
- QuickFreeze Setting Provides faster, fresher freezing to maintain the flavor and quality of meats
- Integrated Dispenser with LED Lighting, PreciseFill & UltraFlow100 Illuminates the dispenser and pours water in accurate increments or up to 100 ounces per minute
- Electronic Beverage Center Keeps beverages and treats icy cold and easily accessible
- CustomCool™ Technology Chills in minutes, thaws in hours and keeps foods fresher, longer
- Slide 'n Store™ Freezer Basket Offers easy access and flexible storage
- Quick Ice™ Option Makes ice up to 50% faster than normal settings-ideal for entertaining
- TurboCool™ Setting "Revs up" the refrigerator, cooling it quickly after frequent door openings
- Integrated Ice™ System Frees up valuable freezer space; It tilts down, providing easy access to bulk ice
- Tilt-Out Freezer Door Bins Move forward for convenient access
- Integrated Shelf Support System Provides strong, yet flexible support
- Adjustable ClearLook™ Door Bins Hold gallon-size containers with style and ease
- Adjustable Slide-Out, Spillproof Glass Shelves Shelves slide out, spills stay put
- Model PSW26PSWSS Stainless steel

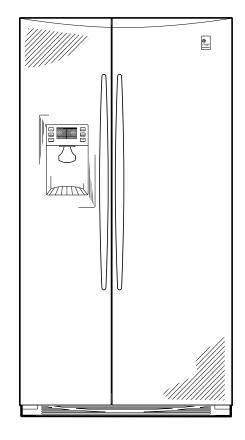



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

