JT3000SF GE® 30" Built-In Single Wall Oven

Dimensions and Installation Information (in inches)

Most 30" Wall Cabinets can be used with this unit.

Note: These ovens are not approved for stackable installations. Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Side-by-side installations require at least 2" between cutouts. C

| KW Rating | | |
|--------------|---------|--|
| 240V | 4.2 | |
| 208V | 3.2 | |
| Breaker Size | | |
| 240V | 20 Amps | |
| 208V | 20 Amps | |

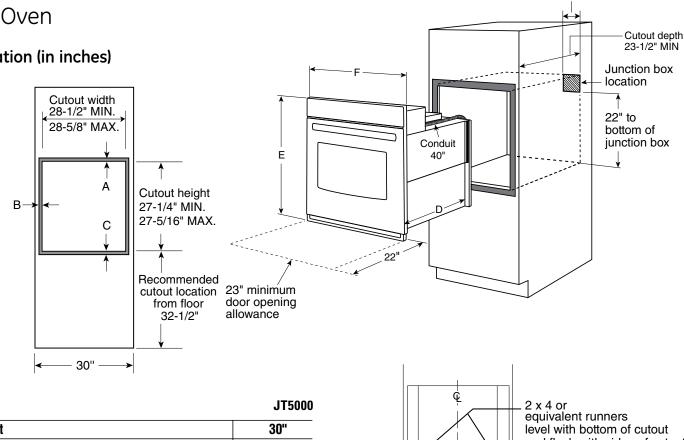

| Cabinet | 30" |
|--|----------|
| A – Overlap of oven at top of cutout | 1" |
| B – Overlap of oven over side of edges of cutout | 3/4" |
| C – Overlap of oven at bottom of cutout | 1-1/4" |
| Oven | |
| D – Overall depth with handle | 27-3/16" |
| Overall depth without handle | 23-1/2" |
| E – Overall height with trim | 28-3/8" |
| F – Overall width | 29-3/4" |



and flush with sides of cutout or solid bottom floor.

9-1/2" MAX.



Listed by Underwriters Laboratories



imagination at work

For answers to your Monogram[®] or GE appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.

Specification Revised 8/14

JT3000SF GE® 30" Built-In Single Wall Oven

Optional Undercounter Dimensions and Installation Information

Note: 36" ribbon cooktop are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.


Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Installation information: Before installing, consult installation instructions packed with products for current dimensional data and for alternate installation options.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Dimension and installation information are shown in inches.

Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

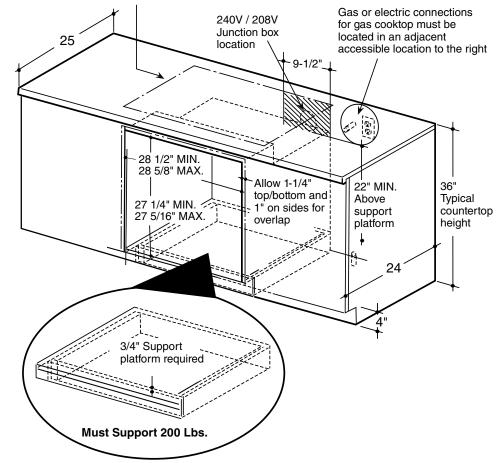



imagination at work

For answers to your Monogram[®] or GE appliance questions, visit our website at geappliances.com or call GE Answer Center[®] service, 800.626.2000.

Specification Revised 8/14

JT3000SF GE® 30" Built-In Single Wall Oven

Features and Benefits

- Self-clean with steam clean option Clean your oven the way you want
- Self-clean heavy-duty oven racks Conveniently clean your oven and racks together
- Ten-pass bake element Even baking is assured with heat that covers more surface area
- Eight-pass broil element Get full broil coverage and even browning from edge to edge
- 5.0 cu. ft. oven capacity Cook more dishes at once
- Black gloss oven interior Enjoy a clean and sleek appearance
- Electronic touch controls Confidently operate the oven with one easy touch
- Hidden bake Make cleanup easy by eliminating hard-toreach areas
- Audible preheat signal Know when the oven is ready
- Certified Sabbath mode Prepare foods by kosher standards
- Model JT3000SFSS Stainless steel



