



30" SLIDE-IN PRO-STYLE® DUAL-FUEL AND GAS RANGES

JDS8860BDP, JGS8860BDP – 30¾" x 37¼" x 29⅛"

PRODUCT DIMENSIONS

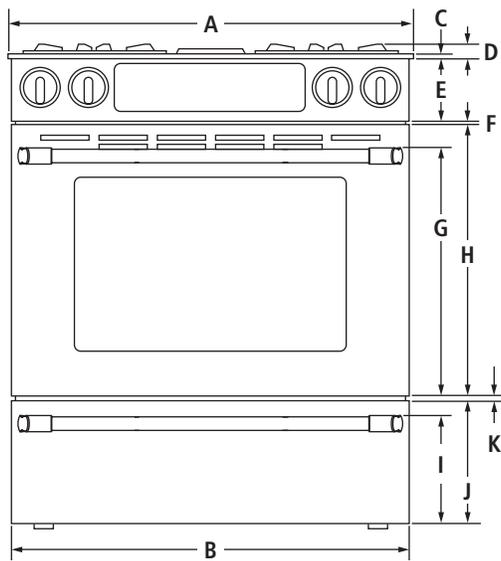

FRONT VIEW

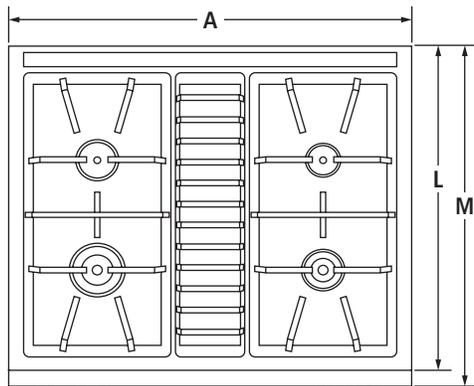

TOP VIEW


MODEL #		JDS8860BDP	JGS8860BDP
		in	cm
<b>A</b>	Overall width	30¾	78.1
<b>B</b>	Width of door/drawer	29¾	75.6
<b>C</b>	Height of cooking surface	¾	1.1
<b>D</b>	Height with grates	1½	3.7
	Height with vent*	1¾	4.4
<b>E</b>	Height of control panel	4⅛	10.6
<b>F</b>	Space between door and control panel	⅝	1.5
<b>G</b>	Height to top of oven handle	19	48.2
<b>H</b>	Height of door	20¼	51.5
<b>I</b>	Height to top of warming drawer handle	7	17.7
<b>J</b>	Height of warming drawer	8⅝	22.0
<b>K</b>	Space between door and warming drawer	⅞	2.3
<b>L</b>	Depth of cooking surface	23¾	59.5
<b>M</b>	Depth to edge of control panel	25½	64.7

\*Model JGS8860BDP.

30" SLIDE-IN PRO-STYLE® DUAL-FUEL AND GAS RANGES

JDS8860BDP, JGS8860BDP – 30¾" x 37¼" x 29⅛"

DIMENSIONS AS INSTALLED

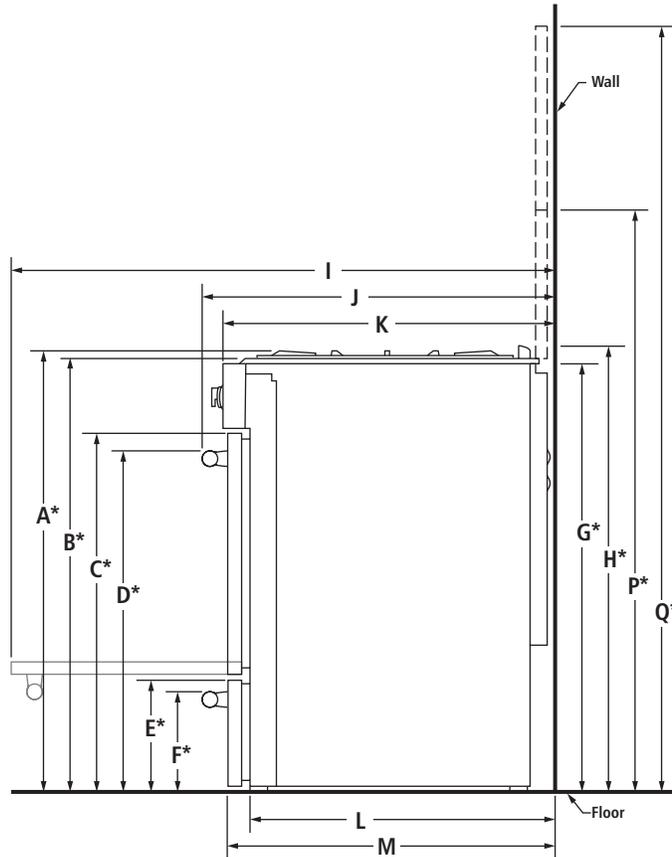


SIDE VIEW

MODEL #		JDS8860BDP	
		JGS8860BDP	
		in	cm
<b>A*</b>	Height to top of grates (min.)	37¼	94.5
<b>B*</b>	Height to top of cooking surface (min.)	36⅞	91.9
<b>C*</b>	Height to top of door (min.)	30⅞	78.4
<b>D*</b>	Height to top of oven handle (min.)	29½	74.8
<b>E*</b>	Height to top of warming drawer (min.)	9⅝	24.5
<b>F*</b>	Height to top of warming drawer handle	8⅝	21.7
<b>G*</b>	Height to top of countertop (min.)	35¾	90.8
<b>H*</b>	Height to top of vent (min.)**	37½	95.2
<b>I</b>	Depth with door fully open	45¼	114.8
<b>J</b>	Depth with handles	29⅞	74.0
<b>K</b>	Depth with control panel	27	68.5
<b>L</b>	Depth without door	24⅜	61.8
<b>M</b>	Depth with door	26⅜	67.0
<b>N</b>	Height of countertop channel	1⅝	4.0
<b>O</b>	Depth to countertop channel	1⅝	4.0

OPTIONAL ACCESSORIES

<b>P*</b>	Height to top of 12" stainless steel backsplash (min.)	47¾	121.3
<b>Q*</b>	Height to top of 30" stainless steel backsplash (min.)	65¾	167.0

\*Add up to 1¾" (4.4 cm) to height with leg levelers fully extended.  
 \*\*Model JGS8860BDP.

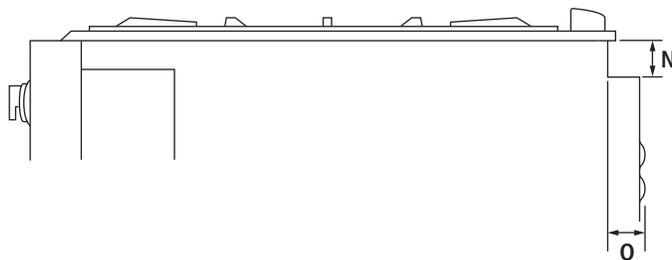


SIDE VIEW – COUNTERTOP CHANNEL DETAIL


30" SLIDE-IN PRO-STYLE® DUAL-FUEL AND GAS RANGES

JDS8860BDP, JGS8860BDP – 30¾" x 37¼" x 29⅛"


OPENING/CLEARANCE DIMENSIONS

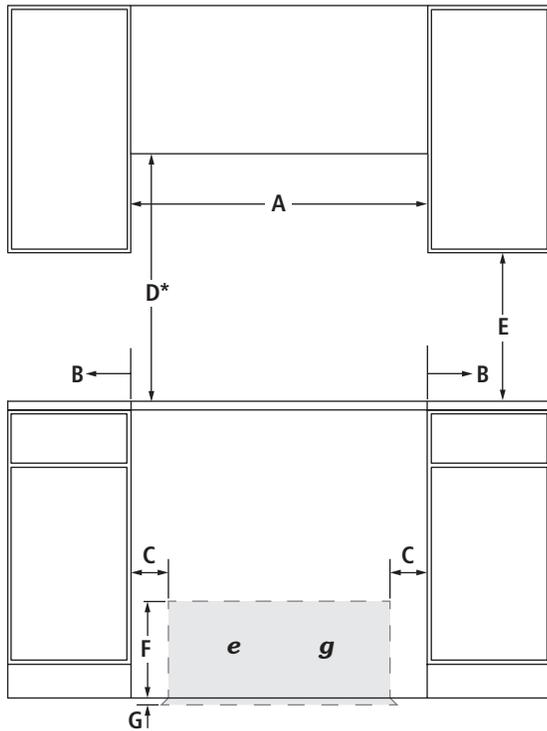


FRONT VIEW

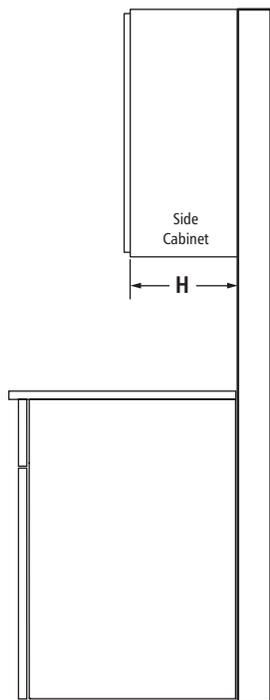

SIDE VIEW

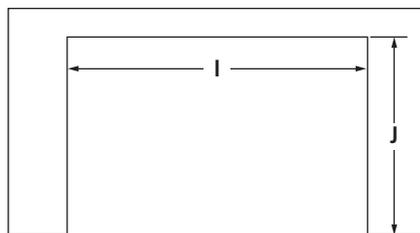

TOP VIEW – CUTOUT

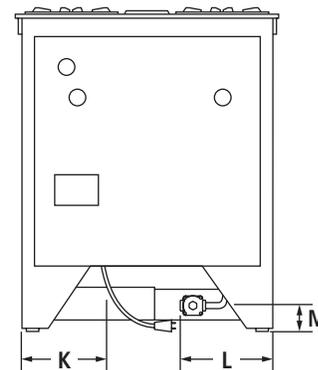

BACK VIEW

MODEL #		JDS8860BDP JGS8860BDP	
		in	cm
A	Width of combustable area above cooking surface (min.)	30	76.2
B	Width from cooktop to fixed wall or other combustable material (min.)	3	7.6
C	Width from electrical installation area to cabinet (min.)	5½	14.0
D*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2
E	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
F	Height of electrical installation area (max.)	10	25.4
G	Depth of electrical installation area (max.)	2¼	5.7
H	Depth of upper cabinet (recommended)	13	33.0
I	Width of cutout	30	76.2
J	Depth of cutout	24	61.0
K	Width to power cord	9¼	23.5
L	Width to gas inlet	4½	11.5
M	Height to gas inlet	3⅛	8.0
e	Recommended junction box location		
g	Recommended gas access location		

\*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or microwave hood combination above the range, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

ELECTRICAL REQUIREMENTS

JDS8860BDP: 240 volt, 60 Hz, AC only, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended. Minimum length of power cord is 48" (121.9 cm).

JGS8860BDP: 120 volt, 60 Hz, AC only, 15-amp fused, grounded circuit is required. A dedicated circuit is recommended. Minimum length of power cord is 48" (121.9 cm).

# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS	
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W	
<b>PRO-STYLE® RANGETOPS</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>48-INCH (less than 60,000 BTU total)</b>																		
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>PRO-STYLE® DUAL-FUEL AND GAS RANGES</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>SLIDE-IN RANGES</b>																		
<b>Dual-Fuel and Gas Conventional (less than 60,000 BTU total)</b>																		
JDS886BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	—	★	★	■
<b>ELECTRIC CONVENTIONAL</b>																		
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.  
 B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

