



30" WARMING DRAWERS

JWD2030WS, JWD2030WX – 29¾" x 10¾" x 26"

PRODUCT DIMENSIONS

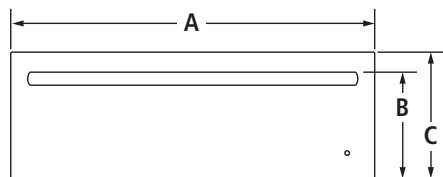

FRONT VIEW

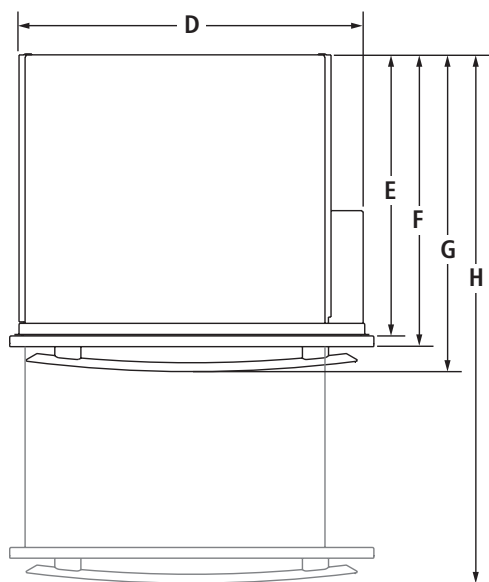


TOP VIEW

MODEL #		JWD2030WS		JWD2030WX	
		in	cm	in	cm
A	Overall width (max.)	29¾	75.6	29¾	75.6
	Height to top of handle				
B	Euro-Style (color-coordinating)	8⅞	22.6	8⅞	22.6
	Pro-Style® Stainless	—	—	9⅞	23.3
C	Overall height (max.)	10¾	26.3	10¾	26.3
D	Width of recessed warming drawer	28¼	71.8	28¼	71.8
E	Depth of recessed warming drawer	23⅞	58.8	23⅞	58.8
F	Depth with drawer	24	61.0	—	—
G	Depth with handle				
	Euro-Style (color-coordinating)	26	66.2	26	66.2
	Pro-Style® Stainless	—	—	26½	67.4
H	Depth with drawer fully open including handle				
	Euro-Style (color-coordinating)	45¾	115.2	45¾	115.2
	Pro-Style® Stainless	—	—	45⅞	116.4

30" WARMING DRAWERS

JWD2030WS, JWD2030WX – 29³/₄" x 10³/₈" x 26"


DIMENSIONS AS INSTALLED

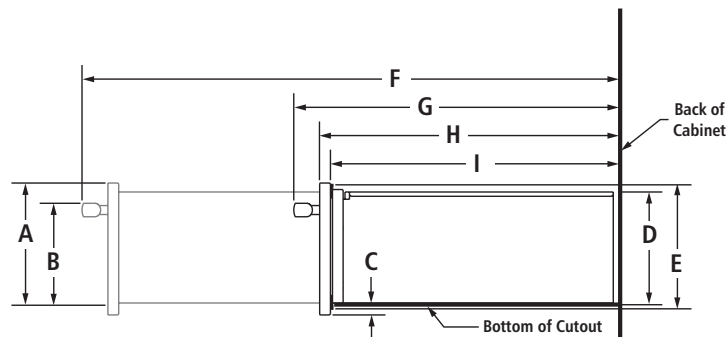

SIDE VIEW

MODEL #		JWD2030WS		JWD2030WX	
		in	cm	in	cm
A	Height to top of drawer (max.)	9 ³ / ₄	24.8	9 ³ / ₄	24.8
B	Height to top of handle Euro-Style (color-coordinating)	8 ¹ / ₄	21.1	8 ¹ / ₄	21.1
	Pro-Style® Stainless	—	—	8 ⁵ / ₈	21.8
C	Height of drawer extending below cutout	5 ⁸ / ₈	1.5	5 ⁸ / ₈	1.5
D	Height of recessed warming drawer	9	22.9	9	22.9
E	Height of warming drawer flange	9 ⁷ / ₈	25.1	9 ⁷ / ₈	25.1
F	Depth with drawer fully open including handle Euro-Style (color-coordinating)	45 ³ / ₈	115.2	45 ³ / ₈	115.2
	Pro-Style® Stainless	—	—	45 ⁷ / ₈	116.4
G	Depth with handle Euro-Style (color-coordinating)	26	66.2	26	66.2
	Pro-Style® Stainless	—	—	26 ¹ / ₂	67.4
H	Depth with drawer	24	61.0	—	—
I	Depth of recessed warming drawer	23 ¹ / ₈	58.8	23 ¹ / ₈	58.8

PANEL DIMENSIONS

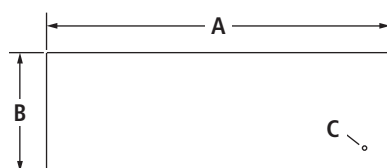

MODEL #		JWD2030WX	
		in	cm
A	Width (min.-max.)	29-29 ³ / ₄	73.7-75.6
B	Height (min.-max.)	9 ¹ / ₁₆ -10 ⁵ / ₁₆	23.0-26.2
C	Hole for indicator light lens (dia.)	5 ¹ / ₁₆	0.8


LOCATION OF INDICATOR LIGHT LENS
Locate lens directly in front of indicator light.

PANEL THICKNESS
Depth of flat or raised panel will vary depending on surrounding cabinetry.


30" WARMING DRAWERS

JWD2030WS, JWD2030WX – 29¾" x 10¾" x 26"


OPENING/CLEARANCE DIMENSIONS

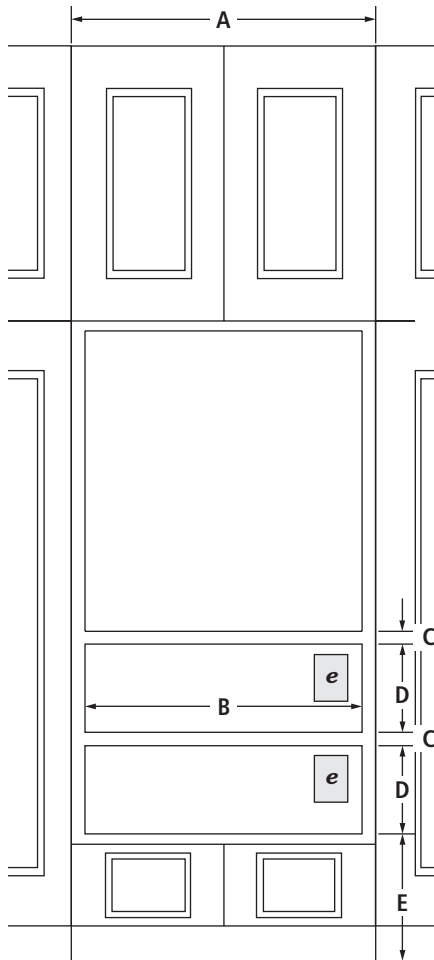

FRONT VIEW

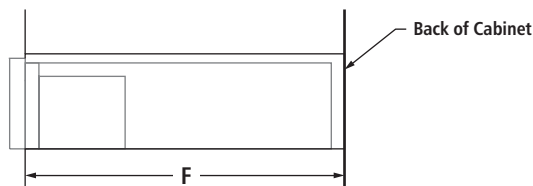

SIDE VIEW



BACK VIEW

MODEL #		JWD2030WS	
		JWD2030WX	
		in	cm
A	Width of cabinet (min.)	30	76.2
B	Width of cutout	28½	72.4
C	Height between cutouts (min.)	2½	6.4
D	Height of cutout	9⅛	23.2
E	Bottom of cutout to floor (recommended)	8¼	21.0
	Bottom of cutout to floor (min.)	5	12.7
F	Depth of cutout (min.)	24	61.0
e	Recommended outlet location		

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. A dedicated circuit is recommended.

If the outlet is on the rear wall behind the warming drawer, it must be recessed and located in the upper right-hand corner. If outlet is located in an adjacent cabinet, drill a 1¾" (3.5 cm) minimum diameter hole in the side wall or support surface to access the power supply cord.


LOCATION REQUIREMENTS

Support surface must be solid, level and flush with the bottom of the cabinet cutout. The warming drawer must be leveled before completing installation.


30" WARMING DRAWERS – FLUSH INSTALLATION

JWD2030WS, JWD2030WX – 29³/₄" x 10³/₈" x 24" (depth without handle)


OPENING/CLEARANCE DIMENSIONS

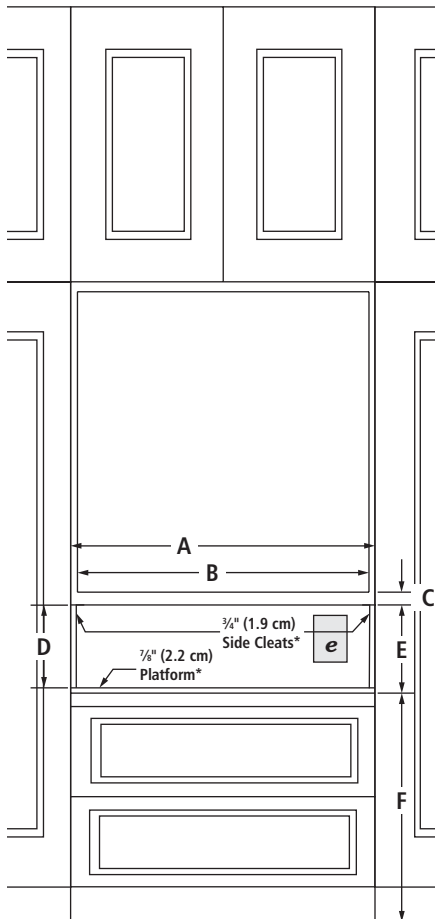


FRONT VIEW

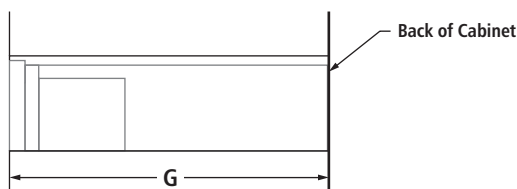

SIDE VIEW

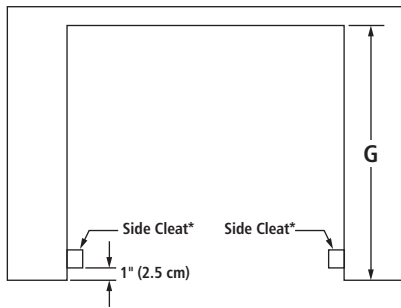

TOP VIEW



BACK VIEW

MODEL #		JWD2030WS JWD2030WX	
		in	cm
A	Width of flush inset cutout (min.)	30	76.2
B	Width of opening (min.)	28½	72.4
C	Height between cutouts (min.)	2½	6.4
D	Height of opening (min.)	9⅛	23.2
E	Height of flush inset cutout (min.)	10	25.4
F	Bottom of cutout to floor (recommended)	8¼	21.0
	Bottom of cutout to floor (min.)	5	12.7
G	Depth of cutout (min.)	25	63.5
e	Recommended outlet location		

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. A dedicated circuit is recommended.

If the outlet is on the rear wall behind the warming drawer, it must be recessed and located in the upper right-hand corner. If outlet is located in an adjacent cabinet, drill a 1³/₈" (3.5 cm) minimum diameter hole in the side wall or support surface to access the power supply cord.

LOCATION REQUIREMENTS

Support surface must be solid, level and flush with the bottom of the cabinet cutout. The warming drawer must be leveled before completing installation.

FLUSH INSTALLATION REQUIREMENTS

A 25" (63.6 cm) minimum cutout depth is required.

These dimensions will result in a 1¹³/₁₆" (4.6 cm) reveal on the top, a 1¹/₈" (0.3 cm) reveal on the sides and a 5¹/₁₆" (0.8 cm) reveal on the bottom of the warming drawer.

The front face of the cleats and platforms will be visible and should be treated as a finished surface.

*Cleats and platform must be recessed 1" (2.5 cm) from the front of the cabinet.