


MICROWAVE WALL OVEN COMBO

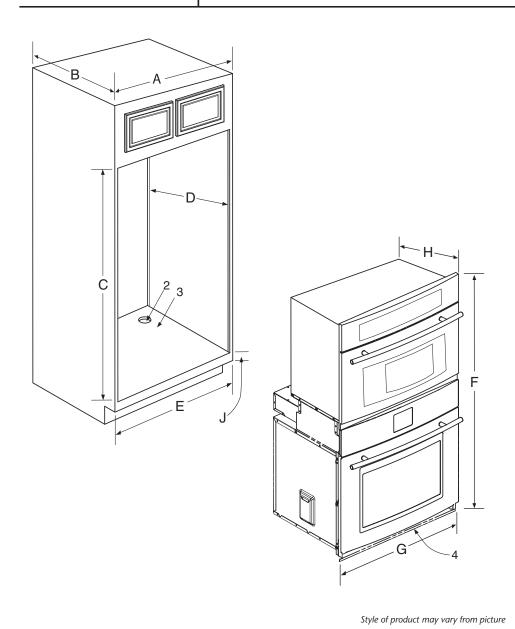

PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	27 min	68.6 min
В	24 min	61.0 min
С	51 ⁷ /8 ± ¹ /16	131.8 ± 0.1
D	24 min	61.0 min
Е	25 ¹ /2 ± ¹ / ₁₆	64.8 ± 0.1
F	52 ¹⁵ /16	134.5
G	26 ³ /4	69.7
H ¹	25 ¹ /2	64.8
J	4 - 10	10.2 - 25.4

MODEL SKUs

JMW8527DAB JMW8527DAQ JMW8527DAS JMW8527DAW

NOTES:

- 1. Excluding door handle.
- 2. 1 1/4" Diameter Conduit Access Hole. Hole must be cut as close to corner of cabinet as possible.
- 3. 5/8" plywood floor (must support 310 pounds).
- 4. Do not block air intake slots along bottom of oven.
- 5. Installed combo wall oven overlaps the cut out 15/16" (2.4 cm) at the top and 1/8" (.3 cm) at the bottom. This must be taken into consideration when locating cutout if installed unit is to be centered in the cabinet.
- 6. These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194° F. If these appliances are installed with cabinets that have a lower working temperature than 194° F, discoloration, delamination or melting may occur.

Electrical requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements