


36"/30" EURO-STYLE WALL-MOUNT CANOPY HOODS


JXW8036WS – 36" x 24<sup>5</sup>/<sub>8</sub>"-42<sup>5</sup>/<sub>8</sub>" x 19<sup>3</sup>/<sub>4</sub>"

JXW8030WS – 30" x 24<sup>5</sup>/<sub>8</sub>"-42<sup>5</sup>/<sub>8</sub>" x 19<sup>3</sup>/<sub>4</sub>"


PRODUCT DIMENSIONS

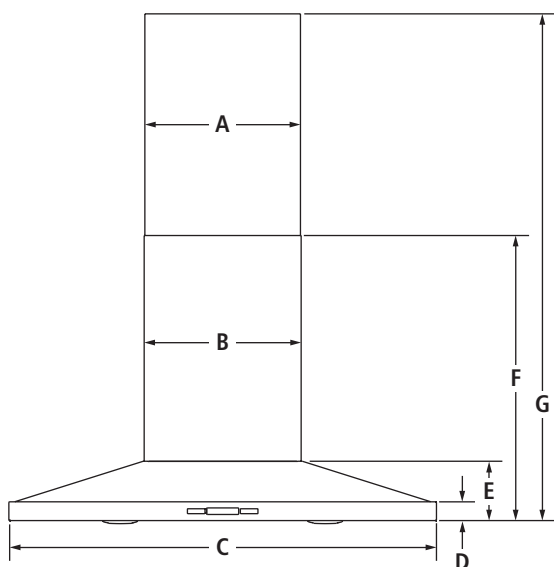

FRONT VIEW

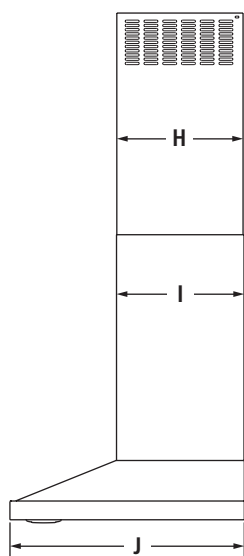

SIDE VIEW

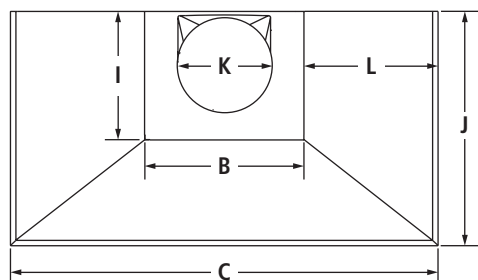

TOP VIEW


MODEL #		JXW8036WS		JXW8030WS	
		in	cm	in	cm
<b>A</b>	Width of chimney extension	13 <sup>1</sup> / <sub>8</sub>	33.3	13 <sup>1</sup> / <sub>8</sub>	33.3
<b>B</b>	Width of chimney	13 <sup>1</sup> / <sub>4</sub>	33.5	13 <sup>1</sup> / <sub>4</sub>	33.5
<b>C</b>	Width of canopy	36	91.4	30	76.2
<b>D</b>	Height of trim	1 <sup>1</sup> / <sub>2</sub>	3.7	1 <sup>1</sup> / <sub>2</sub>	3.7
<b>E</b>	Height of canopy	5	12.7	5	12.7
<b>F</b>	Height of canopy and chimney without extension	24	60.8	24	60.8
<b>G</b>	Overall height with vented installation (min.-max.)	24 <sup>5</sup> / <sub>8</sub> -38 <sup>3</sup> / <sub>4</sub>	62.5-98.4	24 <sup>5</sup> / <sub>8</sub> -38 <sup>3</sup> / <sub>4</sub>	62.5-98.4
	Overall height with non-vented (recirculating) installation (min.-max.)	28 <sup>3</sup> / <sub>8</sub> -42 <sup>5</sup> / <sub>8</sub>	71.9-108.3	28 <sup>3</sup> / <sub>8</sub> -42 <sup>5</sup> / <sub>8</sub>	71.9-108.3
<b>H</b>	Depth of chimney extension	10 <sup>5</sup> / <sub>8</sub>	27.0	10 <sup>5</sup> / <sub>8</sub>	27.0
<b>I</b>	Depth of chimney	10 <sup>3</sup> / <sub>4</sub>	27.3	10 <sup>3</sup> / <sub>4</sub>	27.3
<b>J</b>	Depth of canopy	19 <sup>3</sup> / <sub>4</sub>	50.0	19 <sup>3</sup> / <sub>4</sub>	50.0
<b>K</b>	Vent collar diameter	7 <sup>7</sup> / <sub>8</sub>	20.0	7 <sup>7</sup> / <sub>8</sub>	20.0
<b>L</b>	Width from chimney to edge of canopy	11 <sup>3</sup> / <sub>8</sub>	28.9	8 <sup>3</sup> / <sub>8</sub>	21.3

36"/30" EURO-STYLE WALL-MOUNT CANOPY HOODS

JXW8036WS – 36" x 24<sup>5</sup>/<sub>8</sub>-42<sup>5</sup>/<sub>8</sub>" x 19<sup>3</sup>/<sub>4</sub>"

JXW8030WS – 30" x 24<sup>5</sup>/<sub>8</sub>-42<sup>5</sup>/<sub>8</sub>" x 19<sup>3</sup>/<sub>4</sub>"

OPENING/CLEARANCE DIMENSIONS

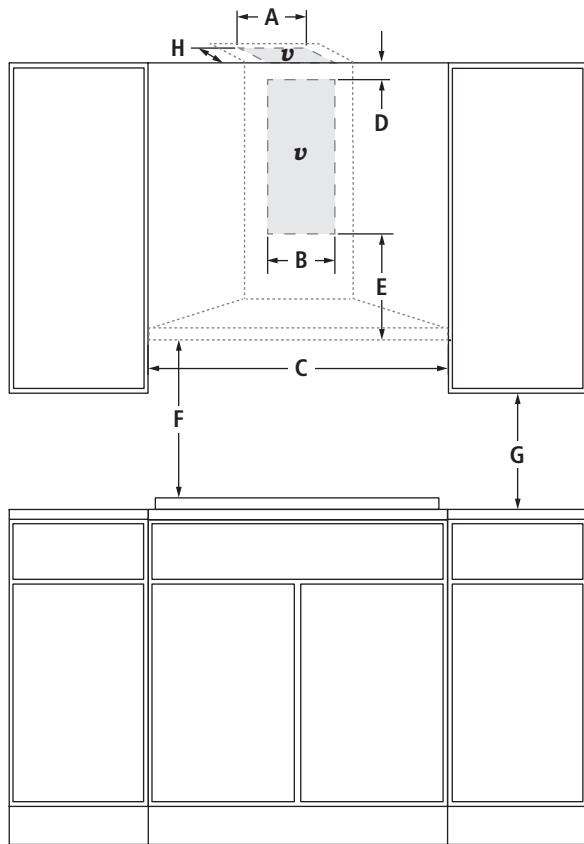

FRONT VIEW

**ELECTRICAL REQUIREMENTS**

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

**VENTING REQUIREMENTS**

The hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, refer to recirculation kit instructions for further information.

**LOCATION REQUIREMENTS**

For vented installation, the chimney can be adjusted for ceilings between 7' 11" (2.4 m) and 9' 2" (2.8 m).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 11" (2.4 m) and 9' 6" (2.9 m).

MODEL #		JXW8036WS		JXW8030WS	
		in	cm	in	cm
A	Width of entry location for vent and power supply – ceiling option (min.-max.)	10-13	25.4-33.0	10-13	25.4-33.0
B	Width of entry location for vent and power supply – wall option (min.-max.)	10-13	25.4-33.0	10-13	25.4-33.0
C	Width of cabinet opening (min.)	36	91.4	30	76.2
D	Minimum height from entry location to ceiling for vent and power supply – wall option (vented installation)	2	5.1	2	5.1
	Minimum height from entry location to ceiling for vent and power supply – wall option (non-vented installation)	9	22.9	9	22.9
E	Height from hood to entry location for vent and power supply – wall option (min.)	17	43.2	17	43.2
F	Suggested distance from hood to electric cooking surface (min.-max.)	24-36	61.0-91.4	24-36	61.0-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	27-36	68.6-91.4	27-36	68.6-91.4
G	Height from upper cabinet to countertop (min.)	18	45.7	18	45.7
H	Depth of entry location for vent and power supply – ceiling option	9½	24.1	9½	24.1
v	Recommended vent and power supply entry location				

# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – COOKTOPS

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS		CUSTOM HOOD LINERS	OVER-THE-RANGE MICROWAVE OVENS
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS	JXD7030YS	UXL6048YSSA UXL6036YSSA	JMV9186W JMV8208W
<b>INDUCTION COOKTOPS</b>																	
<b>36-INCH</b>																	
JIC4536X – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH</b>																	
JIC4430X – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
<b>CONVENTIONAL GAS COOKTOPS</b>																	
<b>36-INCH (less than 60,000 BTU total)</b>																	
JGC9536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JGC1536AD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JGC8536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH (less than 60,000 BTU total)</b>																	
JGC9430BD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JGC1430AD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JGC8430CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
<b>CONVENTIONAL ELECTRIC COOKTOPS</b>																	
<b>36-INCH</b>																	
JEC4536Y – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JEC9536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JEC8536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH</b>																	
JEC4530Y – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JEC9530BD – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JEC8430BD – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections as actual product dimensions may vary.



# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS	
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W	
<b>PRO-STYLE® RANGETOPS</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>48-INCH (less than 60,000 BTU total)</b>																		
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>PRO-STYLE® DUAL-FUEL AND GAS RANGES</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>SLIDE-IN RANGES</b>																		
<b>Dual-Fuel and Gas Conventional (less than 60,000 BTU total)</b>																		
JDS886BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	■	■	—	★	★	■	
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	—	★	★	■	
<b>ELECTRIC CONVENTIONAL</b>																		
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	—	★	★	■	

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.  
 B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

