



36" EURO-STYLE CURVED WALL-MOUNT CANOPY HOOD

JXW8836WS – 36" x 28<sup>7</sup>/<sub>8</sub>-42<sup>1</sup>/<sub>4</sub>" x 20"


PRODUCT DIMENSIONS

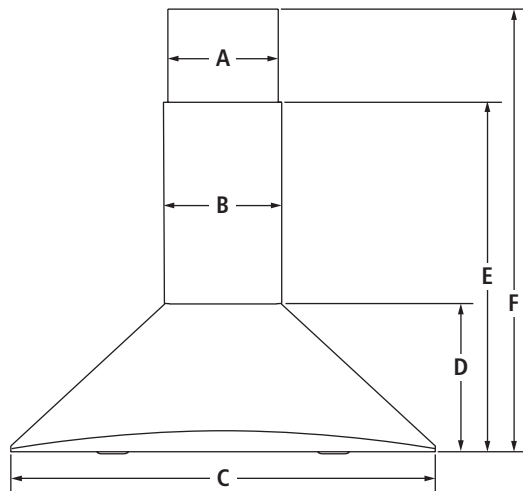

FRONT VIEW

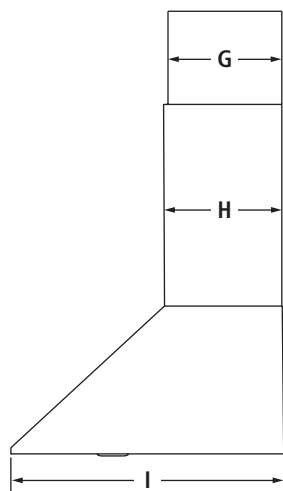

SIDE VIEW

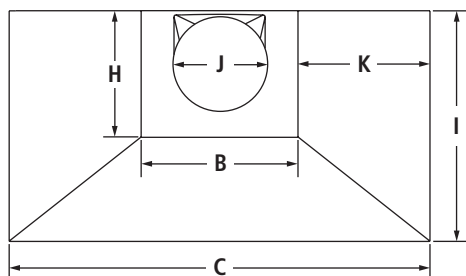


TOP VIEW

MODEL #		JXW8836WS	
		in	cm
<b>A</b>	Width of chimney extension	8	20.4
<b>B</b>	Width of chimney	8 <sup>1</sup> / <sub>8</sub>	20.7
<b>C</b>	Width of canopy	36	91.4
<b>D</b>	Height of canopy	10 <sup>1</sup> / <sub>8</sub>	25.8
<b>E</b>	Height of canopy and chimney without extension	24 <sup>1</sup> / <sub>4</sub>	61.7
<b>F</b>	Overall height with vented installation (min.-max.)	28 <sup>7</sup> / <sub>8</sub> -38 <sup>1</sup> / <sub>2</sub>	73.4-97.6
	Overall height with non-vented (recirculating) installation (min.-max.)	28 <sup>7</sup> / <sub>8</sub> -42 <sup>1</sup> / <sub>4</sub>	73.4-107.2
<b>G</b>	Depth of chimney extension	8	20.4
<b>H</b>	Depth of chimney	8 <sup>1</sup> / <sub>8</sub>	20.7
<b>I</b>	Depth of canopy	20	50.8
<b>J</b>	Vent collar diameter	5 <sup>7</sup> / <sub>8</sub>	15.0
<b>K</b>	Width from chimney to edge of canopy	14	35.4

36" EURO-STYLE CURVED WALL-MOUNT CANOPY HOOD

JXW8836WS – 36" x 28<sup>7</sup>/<sub>8</sub>-42<sup>1</sup>/<sub>4</sub>" x 20"

OPENING/CLEARANCE DIMENSIONS

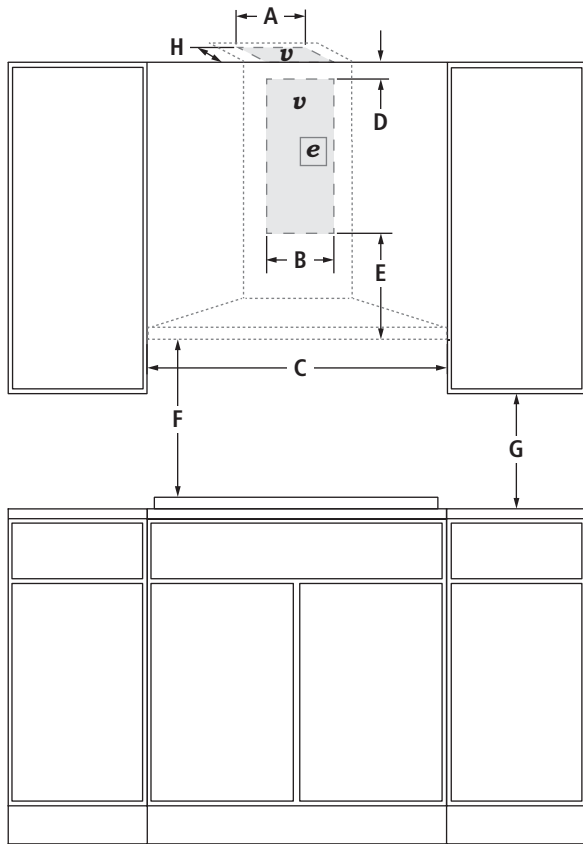

FRONT VIEW

**ELECTRICAL REQUIREMENTS**

120 volt, 60 Hz, AC only, 15- or 20-amp fused, electrical circuit is required. A time-delay fuse or dedicated circuit is recommended.

**VENTING REQUIREMENTS**

The hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, refer to recirculation kit instructions for further information.

**LOCATION REQUIREMENTS**

For vented installation, the chimney can be adjusted for ceilings between 7' 11" (2.4 m) and 8' 8" (2.6 m).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 11" (2.4 m) and 9' (2.7 m).

MODEL #		JXW8836WS	
		in	cm
<b>A</b>	Width of vent entry location – ceiling option	7 <sup>1</sup> / <sub>4</sub>	18.4
<b>B</b>	Width of vent entry location – wall option	7 <sup>3</sup> / <sub>8</sub>	18.8
<b>C</b>	Width of cabinet opening (min.)	36	91.4
<b>D</b>	Minimum height from vent entry location to ceiling – wall option (vented installation)	2	5.1
	Minimum height from vent entry location to ceiling – wall option (non-vented installation)	6	15.2
<b>E</b>	Height from hood to vent entry location – wall option (min.)	15	38.1
<b>F</b>	Suggested distance from hood to electric cooking surface (min.-max.)	27-36	68.6-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	30-36	76.2-91.4
<b>G</b>	Height from upper cabinet to countertop (min.)	18	45.7
<b>H</b>	Depth of vent entry location – ceiling option	6 <sup>5</sup> / <sub>8</sub>	16.8
<b>e</b>	Recommended outlet location – top of hood to center of outlet (max.)	33 <sup>1</sup> / <sub>2</sub>	85.0
<b>v</b>	Recommended vent entry location		

# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – COOKTOPS

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS		CUSTOM HOOD LINERS	OVER-THE-RANGE MICROWAVE OVENS
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS	JXD7030YS	UXL6048YSSA UXL6036YSSA	JMV9186W JMV8208W
<b>INDUCTION COOKTOPS</b>																	
<b>36-INCH</b>																	
JIC4536X – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH</b>																	
JIC4430X – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
<b>CONVENTIONAL GAS COOKTOPS</b>																	
<b>36-INCH (less than 60,000 BTU total)</b>																	
JGC9536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JGC1536AD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JGC8536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH (less than 60,000 BTU total)</b>																	
JGC9430BD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JGC1430AD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JGC8430CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
<b>CONVENTIONAL ELECTRIC COOKTOPS</b>																	
<b>36-INCH</b>																	
JEC4536Y – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JEC9536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JEC8536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
<b>30-INCH</b>																	
JEC4530Y – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JEC9530BD – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JEC8430BD – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections as actual product dimensions may vary.



# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS	
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W	
<b>PRO-STYLE® RANGETOPS</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>48-INCH (less than 60,000 BTU total)</b>																		
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>PRO-STYLE® DUAL-FUEL AND GAS RANGES</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>36-INCH (less than 60,000 BTU total)</b>																		
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—	
<b>36-INCH (more than 60,000 BTU total)</b>																		
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—	
<b>30-INCH (less than 60,000 BTU total)</b>																		
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—	
<b>SLIDE-IN RANGES</b>																		
<b>Dual-Fuel and Gas Conventional (less than 60,000 BTU total)</b>																		
JDS886BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	—	★	★	■
<b>ELECTRIC CONVENTIONAL</b>																		
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.  
 B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

