

PRODUCT MODEL NUMBER


JUB248L

JUB248R

Electrical: 115-Volt, 60-Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your beverage center be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning or removing a light bulb, unplug beverage center or disconnect power.


LOCATION REQUIREMENTS

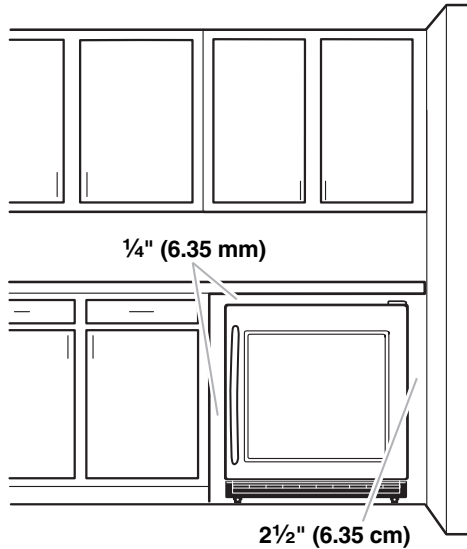

To ensure proper ventilation for your beverage center, allow for a $\frac{1}{4}$ " (6.35 mm) space on each side and at the top. When installing your beverage center next to a fixed wall, leave $2\frac{1}{2}$ " (6.35 cm) minimum clearance on each side to allow for the door to swing open.

NOTE: It is recommended that you do not install the beverage center near an oven, radiator, or other heat source. Do not install in a location where the temperature will fall below 55°F (13°C). For best performance, do not install the beverage center behind a cabinet door or block the base grille.

OVERALL DIMENSIONS

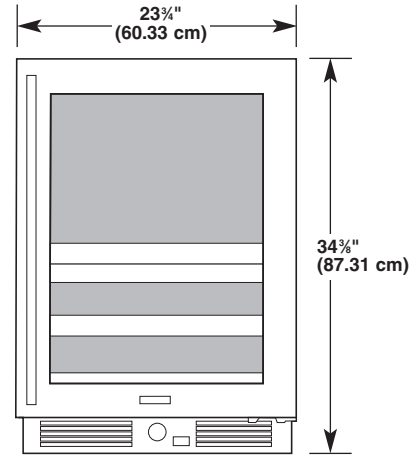

<i>Height to top of cabinet:</i>	$34\frac{3}{8}$ " (87.31 cm)
<i>Height to top of door hinge:</i>	$34\frac{3}{8}$ " - $35\frac{1}{8}$ " (87.31 cm - 89.22 cm)
<i>Width closed:</i>	$23\frac{3}{4}$ " (60.33 cm)
<i>Depth closed including handle:</i>	$26\frac{1}{2}$ " (67.31 cm)
<i>Depth closed excluding handle:</i>	$24\frac{3}{8}$ " (61.91 cm)
<i>Depth excluding doors:</i>	22" (55.88 cm)
<i>Depth with doors open 90°:</i>	47" (119.38 cm)