

JENN-AIR® Compact Refrigerator

PRODUCT MODEL NUMBERS

JUR248L
JUR248R


Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 amp fused (or circuit breaker), grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

CUSTOM OVERLAY PANEL DIMENSIONS

If you plan to install a custom overlay panel, you will need to create the panel yourself or consult a qualified cabinetmaker or carpenter. See dimension drawings for panel specifications.


IMPORTANT:

- The thickness of the wood overlay must be $\frac{3}{4}$ " (1.91 cm).
- Overlay panel must not weigh more than 20 lbs (9.07 kg).
- Overlay panel weighing more than recommended may cause damage to your refrigerator.

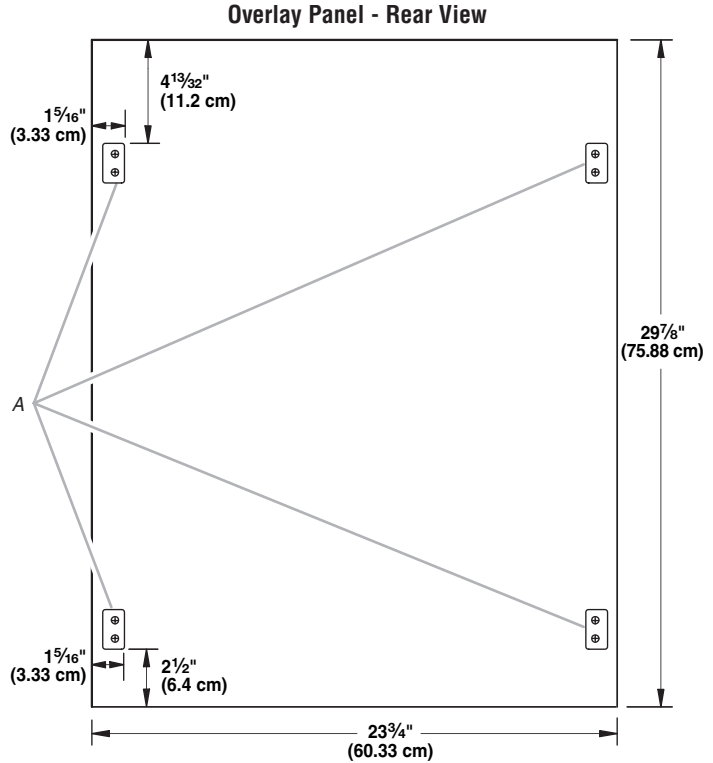

A. Overlay hook locations

LOCATION REQUIREMENTS

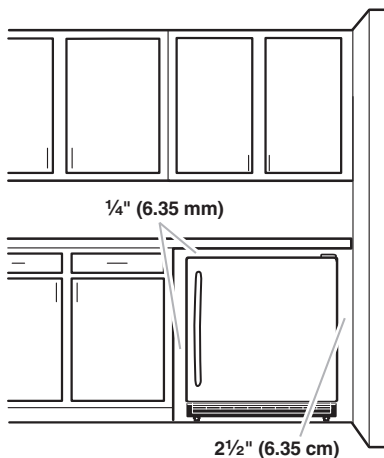

If your refrigerator is to be built-in, to ensure proper ventilation for your refrigerator, allow for $\frac{1}{4}$ " (6.35 mm) space on each side and at the top. When installing your refrigerator next to a fixed wall and the hinge side is next to the wall, leave $2\frac{1}{2}$ " (6.35 cm) minimum to allow for the door to swing open. To open door wider, leave more space.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C). For best performance, do not install the refrigerator behind a cabinet door or block the base grille.