


## **ELECTRIC DOWNDRAFT COOKTOP**

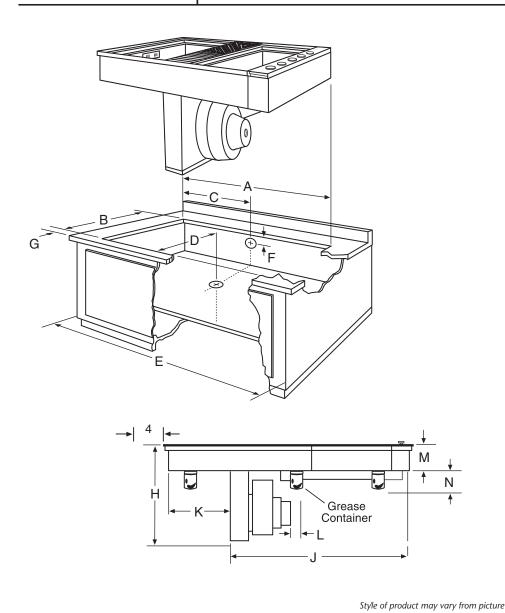

## PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	41 <sup>31</sup> / <sub>32</sub> ± <sup>1</sup> / <sub>16</sub>	106.6 ± .1
В	20 <sup>9</sup> /16 ± <sup>1</sup> /16	52.2 ± .1
С	17 3/4	45.1
D	<b>14</b> <sup>7</sup> /16	36.7
Е	45	114.3
F	8	20.3
G	2 1/8	5.4
Н	17 <sup>1</sup> /2 min	44.5
J	30 1/8	76.5
K	<b>11</b> <sup>7</sup> /16	29.1
L <sup>2</sup>	2	5.1
М	4 3/4	12.1
N <sup>3</sup>	6 1/4	15.9

## **MODEL SKUs**

CVEX4370B CVEX4370W

## **NOTES:**

- 1. Where possible, 6" (15.2 cm) is recommended for motor blower service. Minimum clearance of 1" (2.5 cm) is required to sidewalls and 3/4" (1.9cm) to rear wall.
- 2. Provide 2" minimum (5.1 cm) cabinet clearance to motor for cooling purpose.
- 3. Provide 6 1/4" min (15.9 cm) required for removal of (supplied) grease container(s). Installed dimension for (supplied) grease container(s) is 5 1/2" (14.0 cm)
- 4. Grills installed near a side wall must allow a minimum clearance of 6" (15.2 cm) between cooktop and side wall for maximum performance.
- 5. Vents up to 60 equivalent feet.
- 6. This appliance has been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194° F. If these appliances are installed with cabinets that have a lower working temperature than 194° F, discoloration, delamination or melting may occur.

**Electrical requirements:** Provide for 120/240 or 120/208 VAC, 60 Hz. The unit must be properly circuitprotected and wired according to local electrical codes.