




# BOTTOM-FREEZER REFRIGERATORS

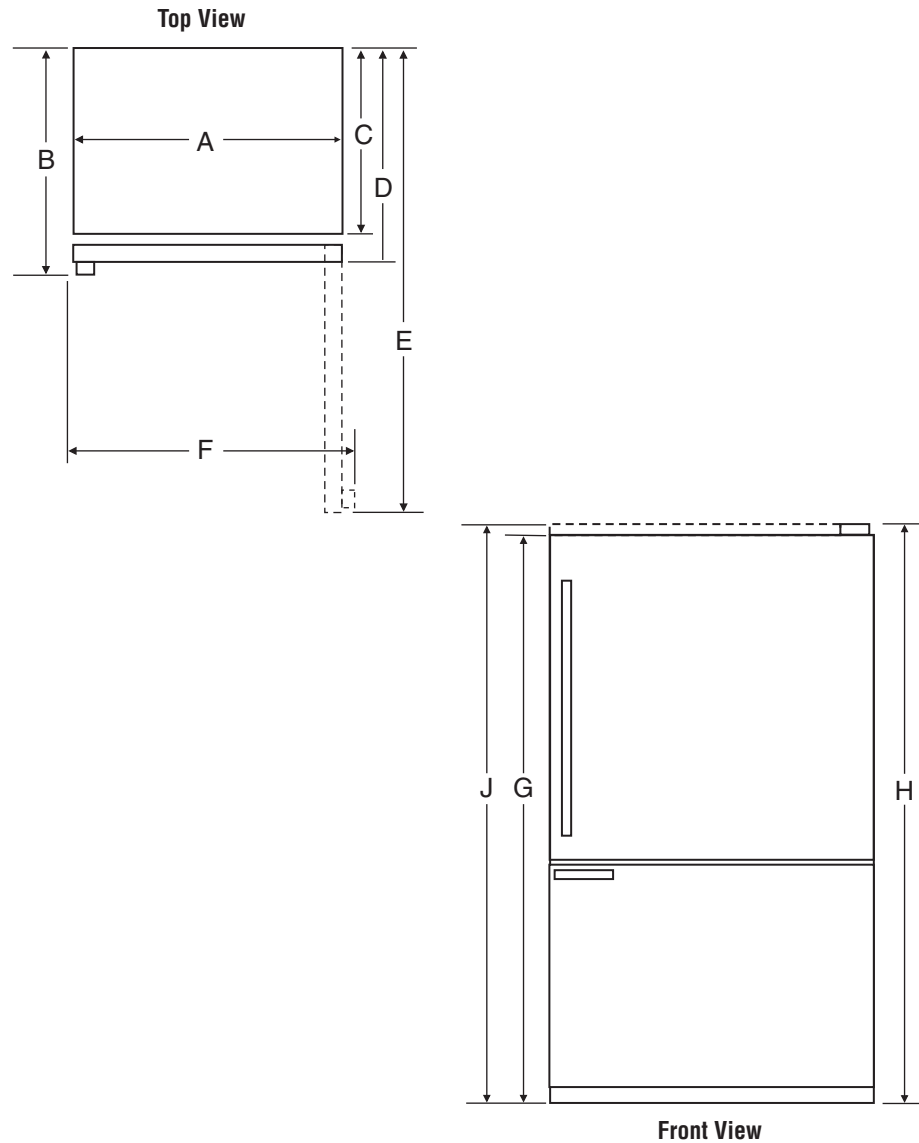

Front View

*Style of product may vary from picture*

## PRODUCT DIMENSIONS

|                | INCHES | CENTIMETERS |
|----------------|--------|-------------|
| A              | 29 5/8 | 75.2        |
| B <sup>1</sup> | 33 1/4 | 84.5        |
| C              | 28     | 71.1        |
| D <sup>2</sup> | 30 3/4 | 78.1        |
| E <sup>3</sup> | 59 1/8 | 150.2       |
| F <sup>4</sup> | 32 3/8 | 82.2        |
| G <sup>5</sup> | 65 5/8 | 166.7       |
| H <sup>6</sup> | 66 7/8 | 169.9       |
| J <sup>7</sup> | N/A    | N/A         |

## MODEL SKU<sup>s</sup>

MBB1952HEW  
MBB1952HEQ

## NOTES:

1. Depth with doors closed, including handle.
2. Depth with doors closed, excluding handle.
3. Depth with doors open at 90 degrees.
4. Width with doors open at 90 degrees, including handles.
5. Height to top of refrigerator
6. Height to top of refrigerator including door hinge.
7. Height to top of refrigerator door trim (if needed for trim models).
8. When installing refrigerator in or near a corner, allow enough room for door to open without interfering with cabinet drawers or hardware.

**Electrical requirements:** Adequately wired individual 120V A/C, 60Hz approved electrical circuit. Use required fuse (15 amp) or comparable circuit breaker.

**Important:** Because of continuing product improvements, Maytag reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions that accompany each product before selecting cabinetry, making cutouts or beginning installation.