

Bespoke Slide-In Induction Range 6.3 cu. ft.
with AI Home & Smart Oven Camera



Available Colors

- Stainless Steel**
NSI6DG9900SR
- White Glass**
NSI6DB990012

Features

- 7" AI Home LCD Display
- Smart Oven Camera
- Ambient Edge Lighting™
- Anti-Scratch Matte Glass Cooktop
- Auto Open Door
- Air Sous Vide
- Air Fry, Tray Included
- Convection Vegetable
- Convection+
- Dual Noise Cancellation
- Self & Steam Clean
- Storage Drawer

Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Convection Auto Conversion
- Self & Steam Clean
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode

Specifications

- Induction Cooktop**
- Right Front: 11" 2,400W, Boost 4,300W
 - Left Front: 7" 1,800W, Boost 2,300W (Sync)
 - Right Rear: 6" 1,200W, Boost 2,000W
 - Left Rear: 7" 1,800W, Boost 2,300W (Sync)

- Oven**
- Capacity: 6.3 cu. ft.
 - Convection Element/Heater
 - Convection Bake
 - Convection Roast
 - Convection Vegetable
 - Bake
 - Variable Broil: Low/High
 - Air Fry
 - Air Sous Vide
 - Keep Warm
 - Bread Proof
 - Dehydrate

Downloadable Oven Modes

- Turkey
- Spare Rib
- Pizza & Naan
- Seafood
- Brownie

Dimensions

- Oven Interior Dimensions (WxHxD)**
Dimensions: 24¹³/₁₆" x 22⁷/₁₆" x 19³/₄"
- Product Dimensions (WxHxD)**
Dimensions: 29¹⁵/₁₆" x 36" – 36³/₄" (Adj.) x 26⁷/₁₆"
Weight: 183.0 lbs
- Shipping Dimensions & Weight (WxHxD)**
Dimensions: 33¹/₁₆" x 41¹/₈" x 30⁵/₁₆"
Weight: 202.8 lbs

Warranty

One (1) Year Parts and Labor

UPC

Finish	Model #	UPC Code
Stainless Steel	NSI6DG9900SR	887276816227
White Glass	NSI6DB990012	887276816142

Rating


ENERGY STAR® Rated:
189 kWh/yr

NSI6D*9900

SAMSUNG

Bespoke Slide-In Induction Range 6.3 cu. ft.
with AI Home & Smart Oven Camera

Installation Specifications

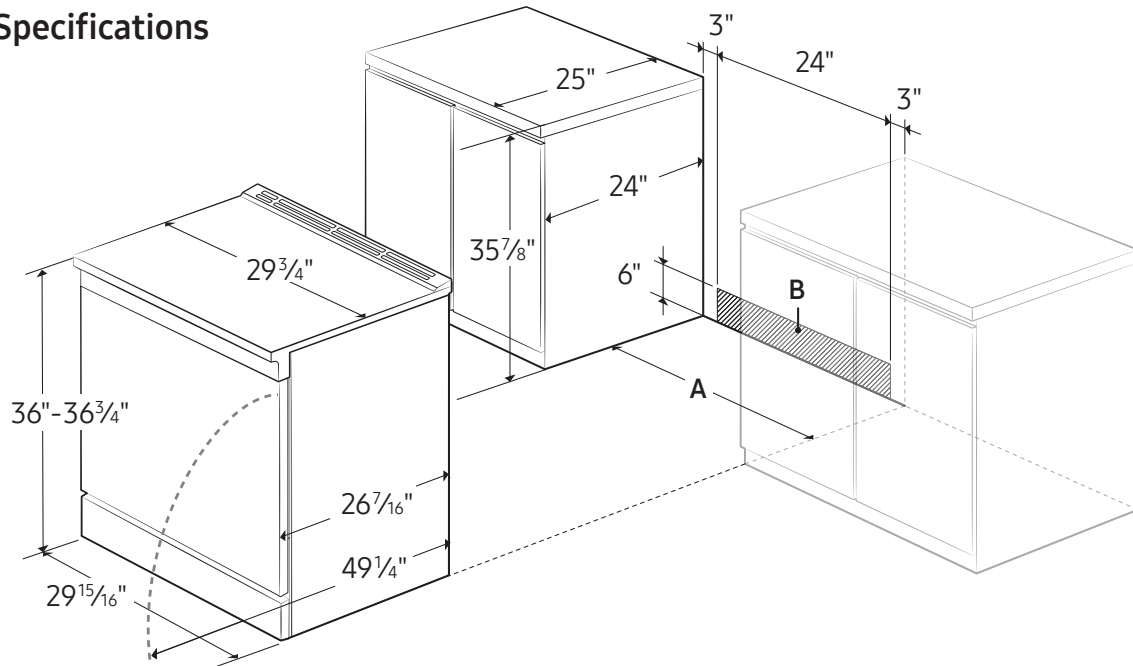

Electrical Requirements


240V/208V/60 Hz

40 Amps

A: Cabinet opening min 30"

B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 36 3/4" high, you must install this range on a hard, heat resistant support that raises the surface of the range so that it is about even with the countertop.

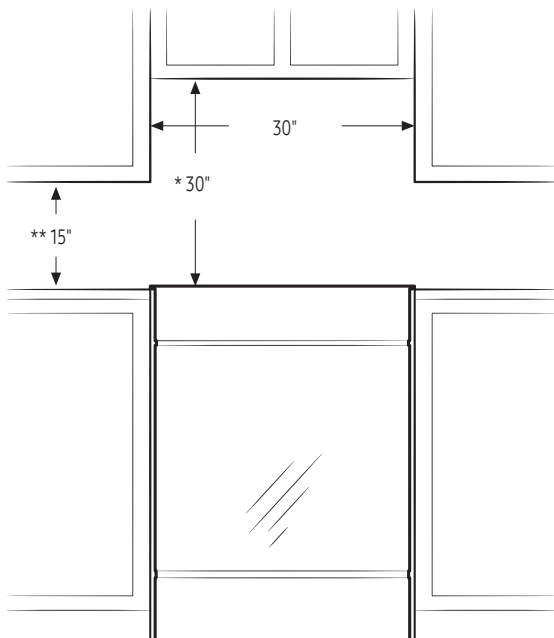

* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

**15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.