# T24UR915RS UNDER-COUNTER GLASS DOOR REFRIGERATOR MASTERPIECE® SERIES HANDLE - RIGHT HINGED





Also Available:

T24UR915LS – Left Hinged with Masterpiece® Series Handle T24UR925LS – Left Hinged with Professional Series Handle T24UR925RS – Right Hinged with Professional Series Handle T24UR905LP – Left Hinged Custom Panel-Ready T24UR905RP – Right Hinged Custom Panel-Ready

# FEATURES & BENEFITS

- Customizable cooling modes Refrigerator, Pantry and Bar
- SoftClose  ${}^{{}_{\mathbb{R}}}$  door hinges for ultra-smooth closing
- Fully adjustable tempered glass shelves
- Door Open Alarm
- LED theater Lighting
- Sabbath Mode
- Touch electronic controls for temperature management

GENERAL PROPERTIES	
SoftClose <sup>®</sup> Door	Yes
Lighting	Adjustable LED Lighting
Tempered Glass Shelves	4
Door Open Alarm	Yes
Quick Chill	Yes
Touch Electronic Controls	Yes
STAR-K Certified Sabbath Mode	Yes
CAPACITY	
Total Capacity (cu. ft.)	5.2 cu. ft.
TEMPERATURE RANGES	
Refrigerator	33°F (0.5°C) to 64°F (18°C)
Pre-Set Cooling Modes	Refrigerator 37°F (3°C) Pantry 53°F (12°C) Bar 34°F (1°C)
Quick Chill	Refrigerator 33°F (0.5°C) for approximately 24 hours
	nours
TECHNICAL DETAILS	nours
TECHNICAL DETAILS Watts (W)	150 W
Watts (W)	150 W
Watts (W) Current (A)	150 W 15 Amp
Watts (W) Current (A) Volts (V)	150 W 15 Amp 115 V
Watts (W) Current (A) Volts (V) Frequency (Hz)	150 W 15 Amp 115 V 60 Hz
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	150 W 15 Amp 115 V 60 Hz 60"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	150 W 15 Amp 115 V 60 Hz 60"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	150 W 15 Amp 115 V 60 Hz 60 " 120V 3-Wire 34 <b>3/8</b> "* x 23 <b>7/8</b> " x
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	150 W 15 Amp 115 V 60 Hz 60 " 120V 3-Wire 34 3/8"* x 23 7/8" x 23 5/8" 34 1/2"-35 1/4" x 24"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	150 W 15 Amp 115 V 60 Hz 60 " 120V 3-Wire 34 3/8"* x 23 7/8" x 23 5/8" 34 1/2"-35 1/4" x 24" x 24"
Watts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHTAppliance Dimensions (H x W x D) (in.)Required Cutout Size (H x W x D) (in.)Net / Gross Weight (lbs.)	150 W 15 Amp 115 V 60 Hz 60 " 120V 3-Wire 34 3/8"* x 23 7/8" x 23 5/8" 34 1/2"-35 1/4" x 24" x 24"
Watts (W)         Current (A)         Volts (V)         Frequency (Hz)         Power Cord Length (in.)         Plug Type         DIMENSIONS & WEIGHT         Appliance Dimensions (H x W x D) (in.)         Required Cutout Size (H x W x D) (in.)         Net / Gross Weight (lbs.)         EFFICIENCY	150 W 15 Amp 115 V 60 Hz 60" 120V 3-Wire 34 3/8"* x 23 7/8" x 23 5/8" 34 1/2"-35 1/4" x 24" x 24" 115 / 126 lbs.
Watts (W)         Current (A)         Volts (V)         Frequency (Hz)         Power Cord Length (in.)         Plug Type         DIMENSIONS & WEIGHT         Appliance Dimensions (H x W x D) (in.)         Required Cutout Size (H x W x D) (in.)         Net / Gross Weight (lbs.)         EFFICIENCY         ENERGY STAR® Qualified	150 W 15 Amp 115 V 60 Hz 60 " 120V 3-Wire 34 3/8"* x 23 7/8" x 23 5/8" 34 1/2"-35 1/4" x 24" x 24" 115 / 126 lbs. Yes

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

### 2 Year

Limited Warranty for Sealed Refrigeration System\*; Parts and Labor

## 3rd to 6th Year

Limited Warranty for Sealed Refrigeration System\*; Parts Only

#### 7th to 12th Year

\*Height adjustable + 1/2" (13 mm) with legs fully extended \*\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

# T24UR915RS UNDER-COUNTER GLASS DOOR REFRIGERATOR MASTERPIECE® SERIES HANDLE - RIGHT HINGED

Masterpiec 25 13/16" (656mm)

26 1/4" (667mm)


23 5/8\* (600mm


# GLASS DOOR REFRIGERATOR PRODUCT DIMENSIONS


(60

30 5

34 7/8\* (874mm










Top View

### **GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS**

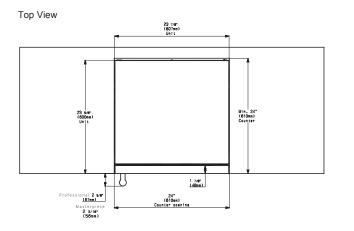

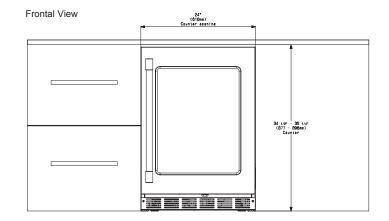

## **GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION**

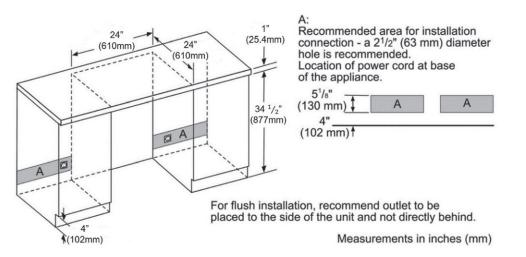





# T24UR915RS UNDER-COUNTER GLASS DOOR REFRIGERATOR MASTERPIECE® SERIES HANDLE – RIGHT HINGED



## **GLASS DOOR REFRIGERATOR CUTOUT & DOOR SWING DIMENSIONS**

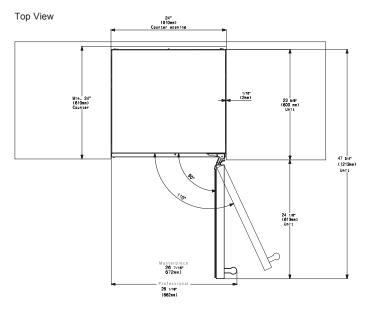

## GLASS DOOR REFRIGERATOR SIDE-BY-SIDE INSTALLATION

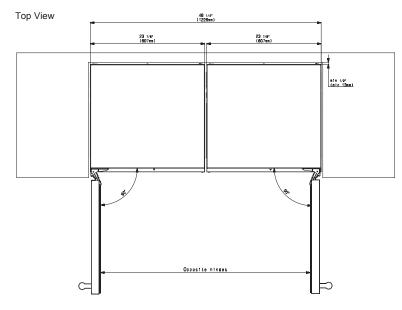

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.