T24UR920LS UNDER-COUNTER GLASS DOOR REFRIGERATOR

Thermador

PROFESSIONAL SERIES HANDLE - LEFT HINGED







Also Available:

T24UR920RS – Right Hinged with Professional Series Handle T24UR910LS – Left Hinged with Masterpiece® Series Handle T24UR910RS – Right Hinged with Masterpiece® Series Handle T24UR900LP – Left Hinged Custom Panel-Ready T24UR900RP – Right Hinged Custom Panel-Ready

FEATURES & BENEFITS

- Customizable cooling modes—Fridge, Pantry and Bar
- $SoftClose^{\scriptsize{(I\!\!R)}}$ door hinges for ultra-smooth closing
- Fully adjustable tempered glass shelves
- Door Open Alarm
- LED theater Lighting
- Sabbath Mode
- Touch electronic controls for temperature management

| Yes |
|---|
| LED Lighting |
| 4 |
| Yes |
| Yes |
| Yes |
| Yes |
| |
| 5.1 cu. ft. |
| |
| 33°F (0.5°C) to 58°F (14.5°C) |
| Refrigerator 37°F (3°C) Pantry 53°F (12°C) Bar 34°F (1°C) |
| Refrigerator 33°F (0.5°C) for approximately 24 hours |
| |
| 150 W |
| 15 Amp |
| 115 V |
| 60 Hz |
| 60" |
| 120V 3-Wire |
| |
| 34 1/4 "* x 23 7/8 " x 24" |
| 35" x 24 ³ /16" x 24 ⁹ /16" |
| 190 / 205 lbs. |
| |
| Yes |
| 274 kWh |
| |
| |

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System*; Parts and Labor

3rd to 6th Year

Limited Warranty for Sealed Refrigeration System*; Parts Only

7th to 12th Year

Page 1 of 3 2 / 19

^{*}Height adjustable + 1/2" (13 mm) with legs fully extended


^{**}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

T24UR920LS UNDER-COUNTER GLASS DOOR REFRIGERATOR


Thermador

PROFESSIONAL SERIES HANDLE - LEFT HINGED


GLASS DOOR REFRIGERATOR PRODUCT DIMENSIONS

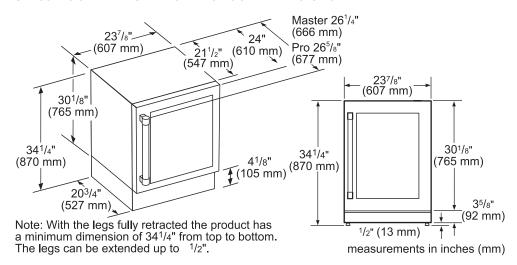

GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS




measurements in inches (mm)



measurements in inches (mm)

GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION



A:
Recommended area for installation connection - a 2¹/2" (63 mm) diameter hole is recommended. Location of power cord at base of the appliance.

It is recommended that the water connection is placed adjacent to the installation cavity, so that it can be accessed without uninstalling the appliance.

For flush installation, recommend outlet and water connection to be placed to the side of the unit and not directly behind.

measurements in inches (mm)


Page 2 of 3 2 / 19

T24UR920LS UNDER-COUNTER GLASS DOOR REFRIGERATOR




PROFESSIONAL SERIES HANDLE - LEFT HINGED

GLASS DOOR REFRIGERATOR CUTOUT & DOOR SWING DIMENSIONS

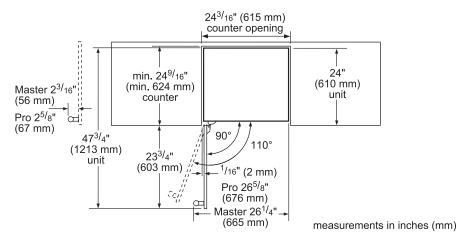

GLASS DOOR REFRIGERATOR SIDE-BY-SIDE INSTALLATION

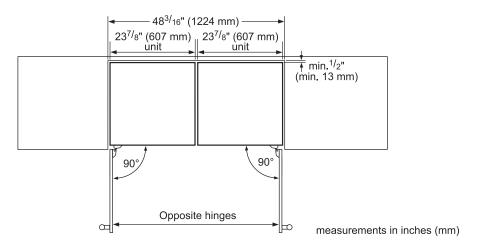

ACCESSORIES (OPTIONAL)

HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR22HNDL20

22-Inch Professional Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328\,\mid\, \text{USA THERMADOR.COM}\,\mid\, \text{CANADA THERMADOR.CA}\,\mid\, \text{@2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.}$

Page 3 of 3 2 / 19