48" Professional Series Pro Grand Commercial Depth Dual Fu Steam Range PRD48JDSGC



PRD48JDSGC Stainless steel

INNOVATION

- The only range in the market with a steam and convection combination oven, plus a full-size convection oven and a warming drawer
- 27 Easy Cook® food programs. Pre-programmed modes automatically set the oven temperature and humidity to ensure perfect cooking results
- Patented Pedestal Star® Burner with QuickClean Base® designed for easy surface cleaning and superior heat spread for any size pan
- · Powerful 22,000 BTU (NG) burner (front right)
- Precision simmering capabilities as low as 100°F (375 BTU) with 4 ExtraLow® Simmer burners
- SoftClose® hinges for ultra smooth closing of both ovens and the warming drawer.
- · Glass surface warming drawer


PERFORMANCE

- 18,000 BTU (NG) Star® Burners
- Titanium surface non-stick, rust-proof cast-aluminum griddle and grill, removable for easy clean-up
- 1.4 cu.ft. steam cavity easily accommodates a 14lb. Turkey
- Steam oven features 9 advanced conventional cooking modes
- Steam cavity is non-plumbed, for easy installation into any home
- Steam Clean function helps keep the steam oven spotless
- Electronic oven display interfaces to cook timer,
 CookControl[™] meat probe and preheat status with audible alert
- Third Element Convection offers precise airflow for cooking on multiple levels without flavor transfer
- Powerful, 4000 Watt 8-pass broil elements in large oven
- Full Access® telescopic racks, integrated easy-grip handle
- Spacious 1.1 cu. ft. warming drawer holds up to ten 11" dinner plates
- · Drawer has open sides for easy and convenient access
- · Star-K Kosher certified

DESIGN

- Distinctive three door design showcases Thermador's self-assured bold and elegant design
- · Pinhole and panel lighting concepts provide functional and

48" Professional Series Pro Grand Commercial Depth Dual Fu Steam Range PRD48JDSGC

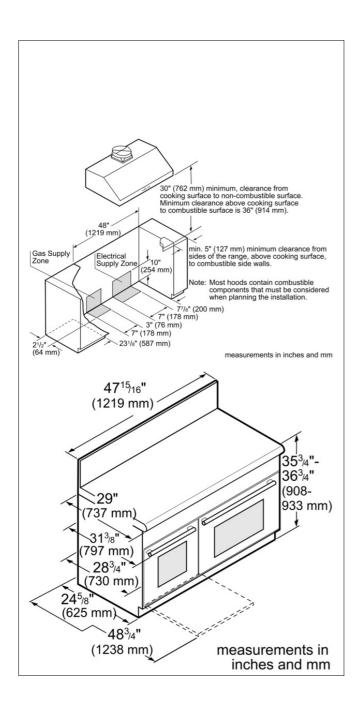

Product Features

Construction type: Freestanding Product color: Stainless steel Power cord length (cm): 137.0 Net weight (kg): 229.000 Gross weight (kg): 254.000

Consumption and connection features

Energy consumption conventional (kWh) - cavity 1: Energy consumption forced air convection (kWh) - cavity 1:

Watts (W): 40580 Current (A): 50 Volts (V): 240/208 Frequency (Hz): 60 Plug type: 240V-4 prong

2013-07-12