48" Professional Series Pro Grand Commercial Depth Liquid Propane Range PRL486JDG



PRL486JDG Stainless steel

INNOVATION

- Powerful 18,000 BTU (LP) burner (front right)
- 15,000 BTU (LP) Star® Burners
- Precision simmering capabilities as low as 100°F (375 BTU) with 4 ExtraLow® Simmer burners
- Full featured small oven with convection, broil, self clean and CookControl™ meat probe
- · Superfast 2 hour self clean in both ovens
- Full Access® telescopic racks, integrated easy-grip handle

PERFORMANCE

- Titanium surface non-stick, rust-proof cast-aluminum griddle and grill, removable for easy clean-up
- Electronic oven display interfaces to cook timer,
 CookControl™ meat probe and preheat status with audible alert
- Powerful, 25,000 BTU bake and 17,000 BTU broil burners in the large oven, 14,000 BTU bake and 9,000 broil in the small
- · Convection Bake offers precise multi-level baking results
- Large oven 5.5 cu.ft.-accommodates commercial sheet pan plus 2.4 cu.ft. in small oven
- · Six rack levels in each oven for multiple item cooking
- · Star-K Kosher certified


DESIGN

- · Bold Professional design
- Pinhole and panel lighting concepts provide functional and stylish aesthetics
- Restaurant style metal knobs
- · Professional style, continuous cast iron grates
- Continuous porcelain, easy to clean cooking surface
- · Large oven door window for maximum viewing
- · Powerful halogen lighting illuminates the oven cavity
- · Signature blue indicator lighting
- Patented Pedestal Star® Burner with QuickClean Base® designed for easy surface cleaning and superior heat spread for any size pan
- · SoftClose® hinges for ultra smooth closing of the oven door

Optional accessories

PA12CVRJ 12" Professional Griddle Cover Accessory PA12GRILHC 12" Grill Accessory PA48JHSG 48" High Shelf for Pro Grand Ranges

48" Professional Series Pro Grand Commercial Depth Liquid Propane Range PRL486JDG

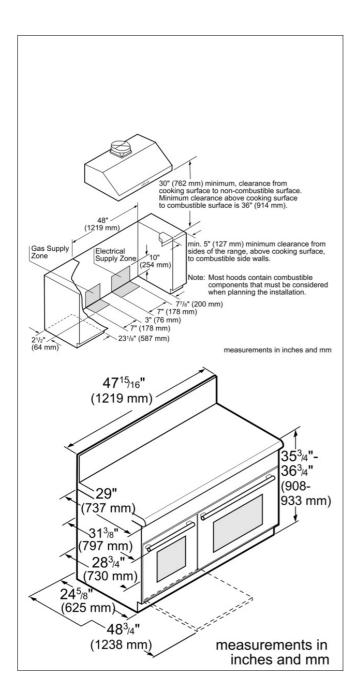

Product Features

Construction type: Freestanding Product color: Stainless steel Power cord length (cm): 243.8 Net weight (kg): 244.000 Gross weight (kg): 270.000

Consumption and connection features

Energy consumption conventional (kWh) - cavity 1: Energy consumption forced air convection (kWh) - cavity 1:

Watts (W): 2920 Current (A): 20 Volts (V): 120 Frequency (Hz): 60 Plug type: 120V-3 prong

2013-07-12