

# Masterpiece® Series

## 36" Wall Hood

### HMWN36FS



#### **HMWN36FS Stainless steel**

##### **Performance**

- 3 fan speeds plus 10 minute high-power operation mode
- Filter systems are highly efficient at capturing grease
- Powerfully quiet ventilation systems
- Extended capture area ensures removal of smoke and odor

##### **Design**

- Brushed stainless steel finish
- Welded, polished seams for a flawless design
- Premium electronic touch controls

##### **Capacity**

- 600 CFM Integrated Blower option VTN600F
- 1200 CFM Integrated Blower option VTN1000F
- Inline Blowers: VTI610D (600 CFM) or VTI1010D (1000 CFM)
- Remote Blowers: VTR630D (600CFM), VTR1030D (1000CFM), or VTR1330E (1300CFM)
- Remote Blower requires Roof Plate RFPLT600 for roof installations (600 CFM)
- Remote Blowers require Roof Plate RFPLT1000 for roof installations (1000/1300 CFM)
- 10" Round duct size
- Vertical ducting direction
- Recirculation possible with kit RECIRC\_\_FS (max 600CFM)
- Replacement charcoal filters available (CHFILT3036)

##### **Convenience**

- Halogen lighting spotlights your best recipes
- Dishwasher safe low-profile baffle filters
- Grease collection trays are easily removed and dishwasher safe
- Built-in Clean Filter Reminder light
- Delayed shut off tackles lingering odors for up to 10 minutes
- Blowers sold separately
- Choose from Inline, Remote or Integrated Blowers
- Hood includes filters, lights, backdraft damper and transition

##### **Optional accessories**

CHFILT3036 Charcoal filter

DC36US "DUCT COVER 6""H 36""W FOR HOODS "

RECIRC36FS Re-circulating kit


RFPLT1000 Roof mounting plate for VTR1030D

RFPLT600 Roof mounting plate for VTR630D

# Masterpiece® Series

## 36" Wall Hood

### HMWN36FS

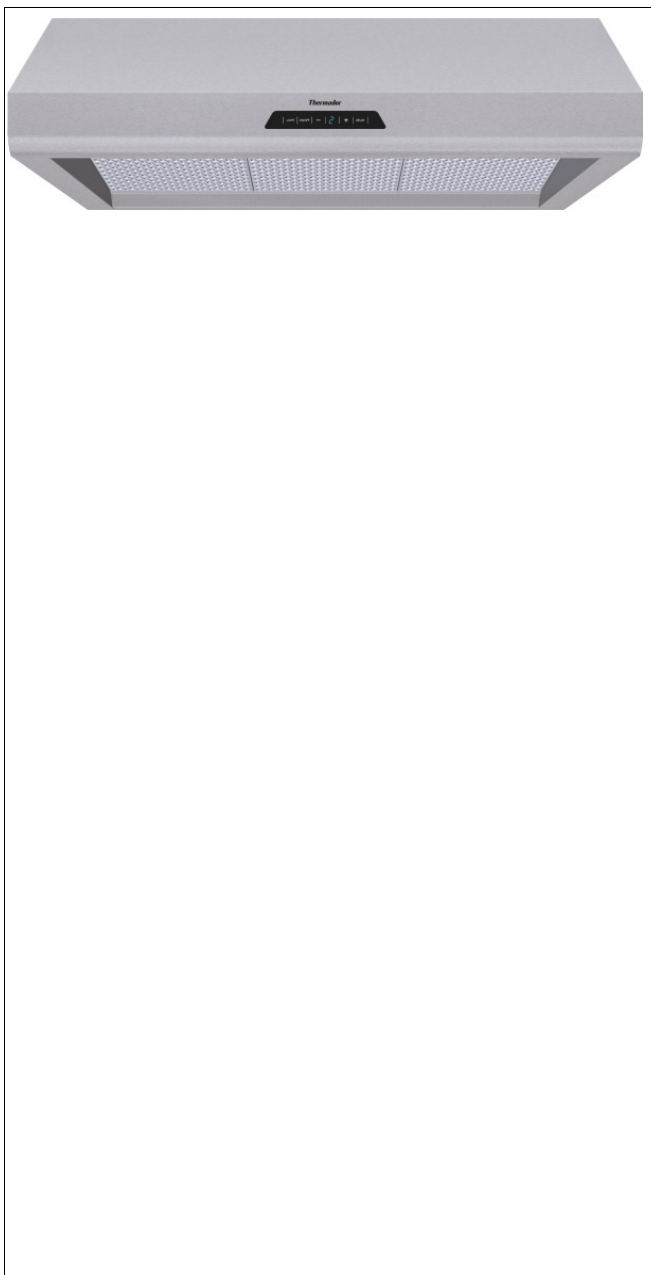

#### Product Features

Operating Mode: Convertable: Ducted / Recirculating  
Number of speed settings: 3-stage  
Delay Shut off modes: 15  
Optional accessories: CHFILT3036, DC36US, DCT36US, PA36JBS, RECIRC36FS, RFPLT1000, RFPLT600  
Number of lights: 2  
Type of lamps used: Halogen  
Total power of the lamps (W): 100  
Grease filter material: Washable stainless steel  
Grease filter type: Multilayer cassette  
Clean filter reminders: Electronic

#### Consumption and connection features

UPC code: 825225863199  
Material: Stainless steel  
Watts (W): 100  
Current (A): 15  
Volts (V): 120  
Frequency (Hz): 60  
Approval certificates: CSA, UL  
Power cord length (in):  
Power cord length (cm):  
Plug type: fixed connection  
Overall appliance dimensions (HxWxD) (in): 11" / 11" x 36" x 23 1/8"  
Overall appliance dimensions (HxWxD) (mm): 279 x 912 x 587  
Product packaging dimensions (HxWxD) (in): 23.99 x 12.99 x 36.39  
Adjustable feet:  
Height of the chimney (in):  
Height of the chimney (mm):  
Vertical rise height:  
Required distance above cooktop/ranges: 30"/30"  
Net weight (lbs): 33  
Net weight (kg): 15.000  
Gross weight (lbs): 48  
Gross weight (kg): 22.000  
Motor location:  
Maximum CFM:  
Diameter of air duct (in) top: 10  
Diameter of air duct (in) back:  
Discharge direction: vertical  
No-return airflow flap: No

2013-07-12