

36" Professional Series 27" Deep Wall Hood PH36GS



PH36GS Stainless steel

Performance

- Three fan speeds
- Auto function senses heat from the cooking surface and adjusts fan speeds
- Powerfully quiet ventilation systems
- Extended capture area ensures removal of smoke and odor
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut off tackles lingering odors for up to 10 minutes
- Dimmer lighting - for a soft lighting effect
- Two Infrared Keep-Hot Lamps hold food warm until serving time
- Dishwasher safe stainless steel baffle filters
- Dishwasher safe grease collection trays are easily removed
- Filter systems are highly efficient at capturing grease
- Vertical or horizontal ducting direction
- Seven different blowers to choose from the line up according to cooking needs
- Choose from Inline, Remote or Integrated Blowers
- Blowers sold separately
- Hood includes filters, backdraft damper and transition
- Approved by CSA/UL for damp environments

Design


- 27" depth hood is a perfect companion to the Pro Grand professional range
- Chiseled design for a seamless integration into any kitchen
- Brushed stainless steel finish
- Halogen lighting spotlights your best recipes
- Easy to view recessed control panel with stainless steel buttons
- Stainless steel professional style baffle filters

Optional accessories

DC36US "DUCT COVER 6"H 36"W FOR HOODS "
RFPLT1000 Roof mounting plate for VTR1030D
RFPLT600 Roof mounting plate for VTR630D

825225899464

36" Professional Series 27" Deep Wall Hood PH36GS

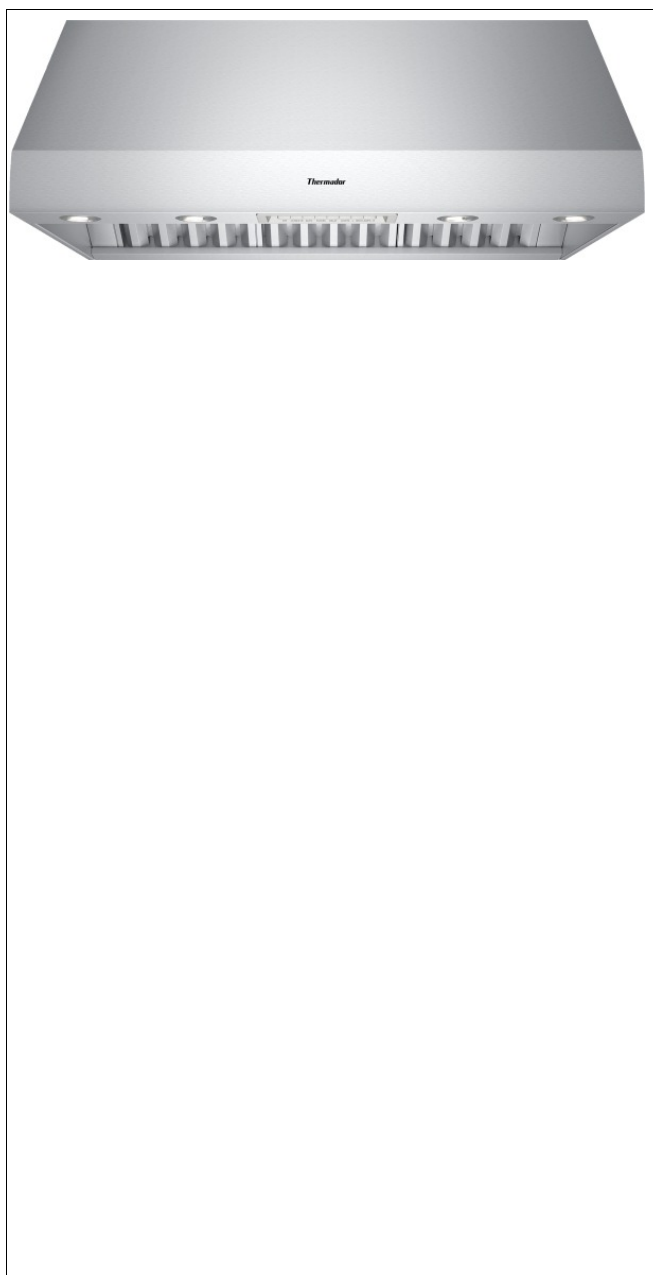

Product Features

Operating Mode: Ducted
Number of speed settings: 3-stage
Delay Shut off modes: 10
Required accessories: Blower
Optional accessories: DC36US, DCT36US, KHS36QS, PA36JBS, RFPLT1000, RFPLT600, RJ310, WC10
Number of lights: 2
Type of lamps used: infra-red
Total power of the lamps (W): 40; 40

Consumption and connection features

UPC code: 825225899464
Material: Stainless steel
Watts (W):
Current (A): 15; 20
Volts (V): 120
Frequency (Hz): 60
Approval certificates: CSA
Power cord length (in):
Power cord length (cm): 150.0
Plug type: 120V-3 prong
Overall appliance dimensions (HxWxD) (in): 18" / x 35 15/16" x 27"
Overall appliance dimensions (HxWxD) (mm): 457 x 913 x 686
Product packaging dimensions (HxWxD) (in): 31.99 x 22.24 x 39.99
Adjustable feet:
Height of the chimney (in):
Height of the chimney (mm):
Vertical rise height:
Required distance above cooktop/ranges: 36"/36"
Net weight (lbs): 80
Net weight (kg): 36.000
Gross weight (lbs): 90
Gross weight (kg): 41.000
Motor location:
Maximum CFM:
Diameter of air duct (in) top: 10
Diameter of air duct (in) back: 10
Discharge direction:
No-return airflow flap: No

2013-07-12