

48" Professional Series 27" Deep Wall Hood PH48GS



PH48GS Stainless steel

Performance

- Three fan speeds
- Auto function senses heat from the cooking surface and adjusts fan speeds
- Powerfully quiet ventilation systems
- Extended capture area ensures removal of smoke and odor
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut off tackles lingering odors for up to 10 minutes
- Dimmer lighting - for a soft lighting effect
- Two Infrared Keep-Hot Lamps hold food warm until serving time
- Dishwasher safe stainless steel baffle filters
- Dishwasher safe grease collection trays are easily removed
- Filter systems are highly efficient at capturing grease
- Vertical or horizontal ducting direction
- Seven different blowers to choose from the line up according to cooking needs
- Choose from Inline, Remote or Integrated Blowers
- Blowers sold separately
- Hood includes filters, backdraft damper and transition
- Approved by CSA/UL for damp environments

Design

- 27" depth hood is a perfect companion to the Pro Grand professional range
- Chiseled design for a seamless integration into any kitchen
- Brushed stainless steel finish
- Halogen lighting spotlights your best recipes
- Easy to view recessed control panel with stainless steel buttons
- Stainless steel professional style baffle filters

Optional accessories


PA48JBS 48" Backsplash Professional Line

RFPLT1000 Roof mounting plate for VTR1030D

RFPLT600 Roof mounting plate for VTR630D

825225899488

48" Professional Series 27" Deep Wall Hood PH48GS

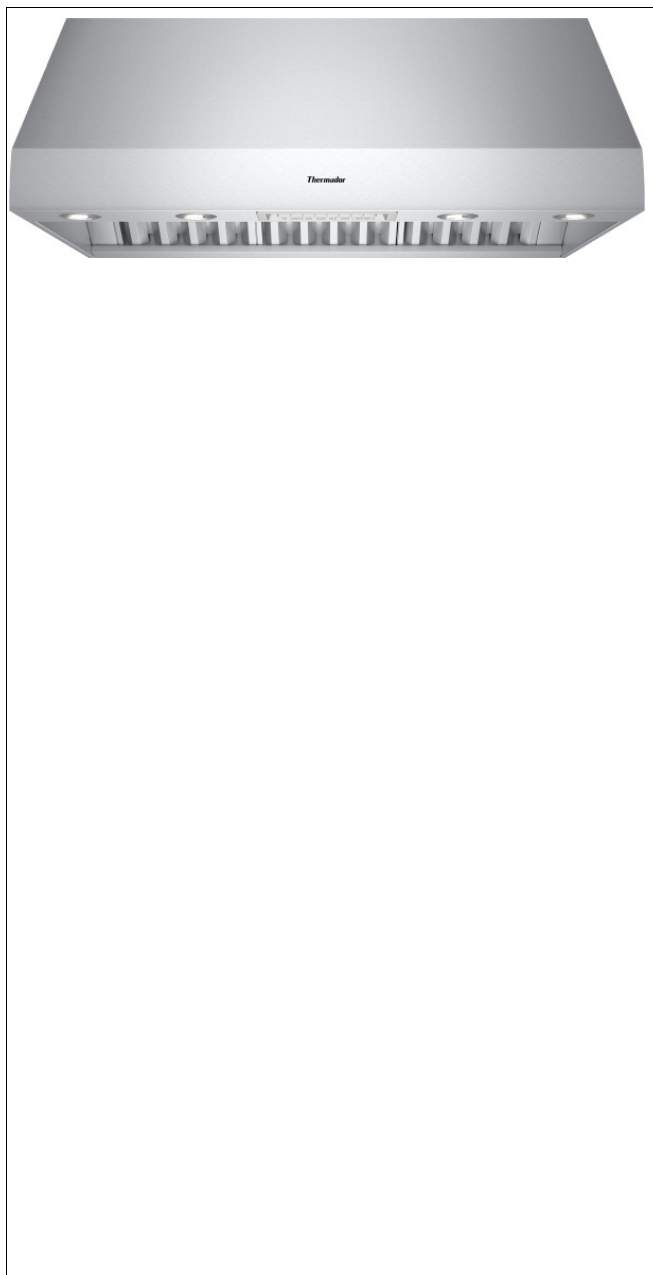

Product Features

Operating Mode: Ducted
Number of speed settings: 3-stage
Delay Shut off modes: 10
Required accessories: Blower
Optional accessories: DC48US, DCT48US, KHS48QS, PA48JBS, RFPLT1000, RFPLT600, RJ310, WC10
Number of lights: 4
Type of lamps used: infra-red
Total power of the lamps (W): 20; 40

Consumption and connection features

UPC code: 825225899488
Material: Stainless steel
Watts (W):
Current (A): 20; 15
Volts (V): 120
Frequency (Hz): 60
Approval certificates: CSA
Power cord length (in):
Power cord length (cm): 150.0
Plug type: 120V-3 prong
Overall appliance dimensions (HxWxD) (in): 18" / x 47 15/16" x 27"
Overall appliance dimensions (HxWxD) (mm): 457MM x 1218 x 686
Product packaging dimensions (HxWxD) (in): 31.99 x 22.24 x 51.99
Adjustable feet:
Height of the chimney (in):
Height of the chimney (mm):
Vertical rise height:
Required distance above cooktop/ranges: 36"/36"
Net weight (lbs): 98
Net weight (kg): 45.000
Gross weight (lbs): 110
Gross weight (kg): 50.000
Motor location:
Maximum CFM:
Diameter of air duct (in) top: 10
Diameter of air duct (in) back: 10
Discharge direction:
No-return airflow flap: No

2013-07-12