

PH48HS

48" Wall Hood

Professional Series



PH48HS Stainless steel

Performance

- Three fan speeds
- Filter systems are highly efficient at capturing grease
- Powerfully quiet ventilation systems
- Six different blowers to choose from the line up according to cooking needs
- Approved by CSL for damp environments
- Extended capture area ensures removal of smoke and odor

Design

- 24" depth hood is 18" tall and a perfect companion with Pro Harmony Ranges and Rangetops
- Chiseled design for a seamless integration into any kitchen
- Brushed stainless steel finish
- Stainless steel control buttons
- Stainless steel professional baffle filters

Convenience

- Halogen lighting spotlights your best recipes
- Dishwasher safe stainless steel baffle filters
- Dimmer lighting - for a soft lighting effect
- Dishwasher safe grease collection trays are easily removed
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut off tackles lingering odors for up to 10 minutes
- Hood includes filters, backdraft damper and transition
- Choose from Inline, Remote or Integrated Blowers
- Blowers sold separately


Capacity

- 600 CFM Integrated Blower option VTN630C
- 1000 CFM Integrated Blower option VTN1030C
- Inline Blowers: VTI610D (600 CFM) or VTI1010D (1000 CFM)
- Remote Blowers: VTR630D (600 CFM) or VTR1030D (1000 CFM) or VTR1330E (1300 CFM)
- Remote Blower requires Roof Plate RFPLT600 for roof installations (600 CFM)
- Remote Blowers require Roof Plate RFPLT1000 for roof installations (1000/1300 CFM)
- 10" Round duct size
- Vertical or horizontal ducting direction

PH48HS

48" Wall Hood

Professional Series

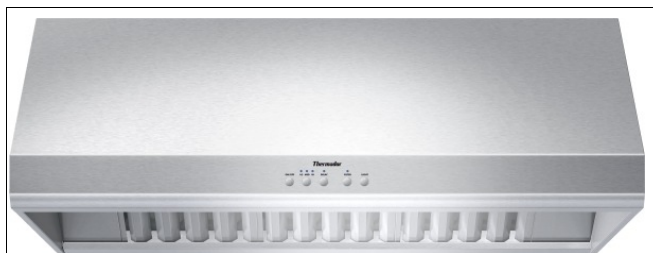

Product Features

Operating Mode: Ducted
Number of speed settings: 3-stage
Delay Shut off modes: 10
Required accessories: Blower
Optional accessories: DC48US, DCT48US, KHS48QS, PA48JBS, RFPLT1000, RFPLT600, RJ310, WC10
Number of lights: 4
Total power of the lamps (W): 40; 160

Consumption and connection features

UPC code: 825225893554
Material: Stainless steel
Watts (W):
Current (A): 15
Volts (V): 120
Frequency (Hz): 60
Approval certificates: CSA
Power cord length (in): 60"
Power cord length (cm): 150.0
Plug type: 120V-3 prong
Overall appliance dimensions (HxWxD) (in): 18" / x 47 15/16" x 24"
Overall appliance dimensions (HxWxD) (mm): 457 MM x 1218 x 610
Product packaging dimensions (HxWxD) (in): 31.99 x 21.99 x 51.99
Adjustable feet:
Height of the chimney (in):
Height of the chimney (mm):
Vertical rise height:
Required distance above cooktop/ranges: 30"/30"
Net weight (lbs): 94
Net weight (kg): 42.000
Gross weight (lbs): 105
Gross weight (kg): 48.000
Motor location:
Maximum CFM:
Diameter of air duct (in) top: 10
Diameter of air duct (in) back: 10
Discharge direction:
No-return airflow flap: No

2013-07-12