## T24UC920DS UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR / FREEZER



**PROFESSIONAL SERIES HANDLE** 







Also Available:

T24UR910DS – With Masterpiece® Series Handle T24UR900DP – Custom Panel-Ready

## **FEATURES & BENEFITS**

- Customizable cooling modes in refrigerator drawer—Fridge, Pantry and Bar
- SoftClose® drawers for ultra-smooth closing
- Customizable drawer dividers and shelving
- Filtered Automatic Ice Maker
- LED Lighting
- Drawer mats keep items from sliding and remove for easy cleaning
- Touch electronic controls for temperature management

GENERAL PROPERTIES	
SoftClose® Drawers	Yes
Lighting	LED Lighting
Customizable Aluminum Dividers / Shelving	Yes
Removable Drawer Mats	Yes
Filtered Automatic Ice Maker	Yes
Full Extension Drawers	Yes
Drawer Open Alarm	Yes
Quick Chill	Yes
Touch Electronic Controls	Yes
STAR-K Certified Sabbath Mode	Yes
CAPACITY	
Total Capacity (cu. ft.)	4.7 cu. ft.
TEMPERATURE RANGES	
Refrigerator	33°F (0.5°C) to 58°F (14.5°C)
Freezer	32°F (0°C) to -5°F (-21°C)
Pre-Set Cooling Modes	Refrigerator 37°F (3°C) Pantry 53°F (12°C) Bar 34°F (1°C)
Quick Chill	Refrigerator 33°F (0.5°C) for approximately 24 hours Freezer -5°F (-21°C) for approximately 24 hours
TECHNICAL DETAILS	
Watts (W) / Current (A) / Volts (V)	150 W / 15 Amp / 115 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	60"
Plug Type	120V 3-Wire
DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	34 <b>1/4</b> "* x 23 <b>7/8</b> " x 24"
Required Cutout Size (H x W x D) (in.)	35" x 24 <sup>3</sup> /16" x 24 <sup>9</sup> /16"
Net / Gross Weight (lbs.)	160 / 174 lbs.
EFFICIENCY	
ENERGY STAR® Qualified	Yes
Annual Energy Consumption	274 kWh

## WARRANTY

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

## 2 Year

Limited Warranty for Sealed Refrigeration System\*; Parts and Labor 3rd to 6th Year

Limited Warranty for Sealed Refrigeration System\*; Parts Only

## 7th to 12th Year

Page 1 of 3 2 / 19

<sup>\*</sup>Height adjustable + 1/2" (13 mm) with legs fully extended


<sup>\*\*</sup>Sealed refrigeration system includes compréssor, evaporator, condenser, dryer / strainer and connection tubing

# T24UC920DS UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR / FREEZER




PROFESSIONAL SERIES HANDLE

## DOUBLE DRAWER REFRIGERATOR / FREEZER PRODUCT DIMENSIONS

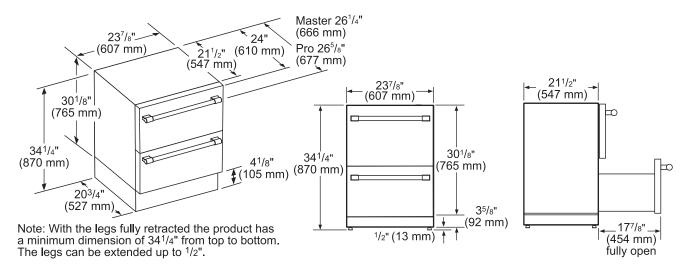


measurements in inches (mm)

## **DOUBLE DRAWER REFRIGERATOR / FREEZER CUTOUT DIMENSIONS**




Thermador double drawer under counter top dimension. (Unit door flushed with the cutout)




measurements in inches (mm)

## DOUBLE DRAWER REFRIGERATOR / FREEZER CLEARANCE DIMENSIONS



## DOUBLE DRAWER REFRIGERATOR / FREEZER SIDE-BY-SIDE INSTALLATION

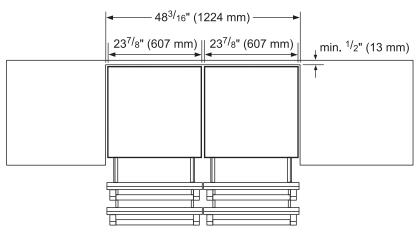

asurements in inches (mm)


Page 2 of 3 2 / 19

# T24UC920DS UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR / FREEZER



PROFESSIONAL SERIES HANDLE

## DOUBLE DRAWER REFRIGERATOR / FREEZER CUTOUT DIMENSIONS & ELECTRICAL LOCATION



A:
Recommended area for installation connection - a 2<sup>1</sup>/2" (63 mm) diameter hole is recommended.
Location of power cord at base of the appliance.

5<sup>1</sup>/<sub>8</sub>" A A A 4" (102 mm) †

It is recommended that the water connection is placed adjacent to the installation cavity, so that it can be accessed without uninstalling the

appliance.

For flush installation, recommend outlet and water connection

to be placed to the side of the unit and not directly behind.

measurements in inches (mm)

## **ACCESSORIES (OPTIONAL)**

#### **HANDLES**

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR20HNDL20 20-Inch Professional Series Handle

## **FILTERS**



UCTRFLTR10 Water Filter

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3 2 / 19