




Design

- Timeless built-in stainless steel refrigerator
- Masterpiece Handle Design


Performance

- Full-Filtered External Water and Ice Dispenser
- On the door ice bin saves freezer space
- Electronic controls for precise temperature management
- FlexTemp® Drawer optimized for fish, meat and produce
- Crisper Drawers
- Gallon door bins
- Frameless glass shelves
- Height adjustable glass shelves
- All metal freezer baskets
- Filtered ice-maker
- SuperCool - Chills food quickly
- Sabbath mode
- Door open alarm
- NO_FEATURE Cu. Ft.



Width dimensions are measured from trim edge to trim edge.
Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.


* When leveling legs are fully extended to 1 1/4" (32 mm) below rollers, add 1 1/8" (29 mm) to the height dimensions.

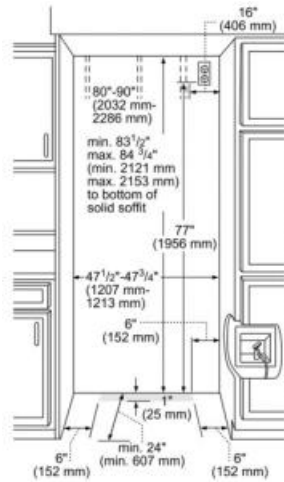


To avoid tipping during use, the solid soffit must be within 1" (25 mm) maximum above the refrigerator. If the solid soffit is higher than 1" (25 mm) or one is not available, then the refrigerator must be braced. If the anti-tip boards are needed, they must be attached to the rear wall studs 80" to 90" (2032 to 2286 mm) above the floor.

Note: A grounded 3-wire outlet should be placed within 16" (406 mm) of the right side cabinets or end panel. The water shut-off should be placed in the base cabinet on either side of the refrigerator or some easily accessible area. If the water shut off valve is not in the base cabinets, the plumbing for the water line can come through the floor or the back wall.

Top Grille Clearance




Note: A clearance of 1/2" (13 mm) must be maintained above the top grille in order for the top grille to be removed.



Width dimensions are measured from trim edge to trim edge.
Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.

* When leveling legs are fully extended to 1 1/4" (32 mm) below rollers, add 1 1/8" (29 mm) to the height dimensions.

The depth from the front of the top grille to the back of the refrigerator cabinet is 25 1/8" (638 mm).



The water line attached to the back of the refrigerator is 5 ft (1524 mm) long. Height dimensions are shown with leveling legs extended 1/8" (3 mm) below rollers.

* When leveling legs are fully extended to 1 1/4" (32 mm) below rollers, add 1 1/8" (29 mm) to the height dimensions.

The depth from the front of the top grille to the back of the refrigerator cabinet is 25 1/8" (638 mm).

Frequency (Hz)	60
Approval certificates	CSA, UL
Energy consumption (kWh/yr)	657.00
Net weight (lbs)	589
Gross weight (lbs)	653
Refrigerator gross capacity (cu.ft.)	19
Freezer gross capacity (cu.ft.)	11
Number of door bins - freezer	6
Number of shelves - freezer	4
Water filter replacement indicator	Yes
Reversible door hinge	No