T24UW920RS UNDER-COUNTER WINE RESERVE WITH GLASS DOOR PROFESSIONAL SERIES HANDLE - RIGHT HINGED







Also Available:

T24UW920LS – Left Hinged with Professional Series Handle T24UW910LS – Left Hinged with Masterpiece® Series Handle T24UW910RS – Right Hinged with Masterpiece® Series Handle T24UW900LP – Left Hinged Custom Panel-Ready T24UW900RP – Right Hinged Custom Panel-Ready

FEATURES & BENEFITS

- Dual zone wine storage with adjustable temperature zones
- Full-extension wine racks
- UV resistant tempered glass door
- SoftClose® door hinges for ultra-smooth closing of the door
- LED theater lighting
- Touch electronic controls for precise temperature management

Yes Left and Right Available Yes Adjustable LED Lighting
Yes Adjustable LED Lighting
Adjustable LED Lighting
6
Wenge Triangular Hardwood dowels w/ Aluminum Front Caps
Yes
41
40°F (3°C) to 52°F (10°C
52°F (11°C) to 64°F (18°C)
150 W
15 Amp
115 V
60 Hz
60"
120V 3-Wire
34 1/4 "* x 23 7/8 " x 24"
34 3/4 " - 35 1/4 " × 24 3/16 " × 24 9/16 "
190 / 205 lbs.
426 kWh

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System**; Parts and Labor

3rd to 6th Year

Limited Warranty for Sealed Refrigeration System*; Parts Only


7th to 12th Year

*Height adjustable + 1/2" (13 mm) with legs fully extended


**Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing




GLASS DOOR WINE RESERVE PRODUCT DIMENSIONS

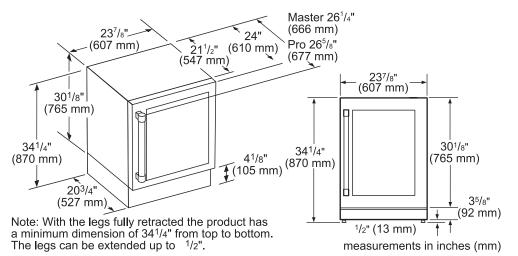

GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS




Frontal view



measurements in inches (mm)

GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS & ELECTRICAL LOCATION



Recommended area for installation connection - a $2^{1}/2^{"}$ (63 mm) diameter hole is recommended. Location of power cord at base of the appliance.



(102 mm)[†] B:


It is recommended that the water connection is placed adjacent to the installation cavity, so that it can be accessed without uninstalling the appliance.

For flush installation, recommend outlet and water connection to be placed to the side of the unit and not directly behind.


measurements in inches (mm)



GLASS DOOR WINE RESERVE CUTOUT & DOOR SWING DIMENSIONS

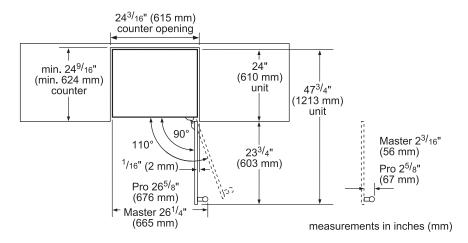

GLASS DOOR WINE RESERVE SIDE-BY-SIDE INSTALLATION

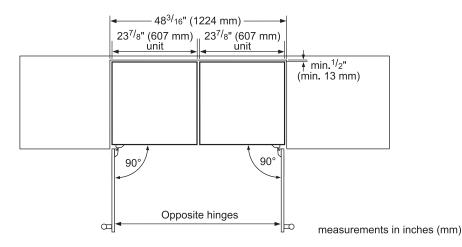

ACCESSORIES (OPTIONAL)

HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.

PR22HNDL20 22-Inch Professional Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.