

Gas Pressure and Regulator Adaptor Requirement for Thor Kitchen Range

NG: Input Pressure: 7 inches, Output Pressure: 5 inches;

LP: Input Pressure: 11 inches Output Pressure: 10 inches.

Adaptor for HRG Gas Range Models (not for 48-inch gas range model)



External thread: NPT 1/2"-14 3/4"-16UNF

Adaptor for HRG 48-inch Gas Range Models (HRG4804U/HRG4808U)



External thread: NPT 3/4"-14 3/4"-16UNF

Adaptor for HRD Dual Fuel Range Models




Internal thread: NPT 1/2"-14 3/4"-16UNF

Adaptor for LRG Gas Range Models



External thread: NPT 1/2"-14 3/4"-16UNF

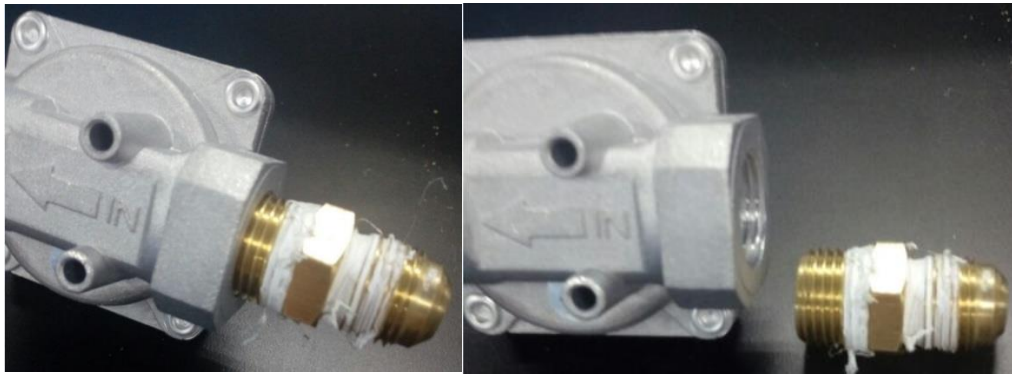

Arrow Refers to the gas flow direction. The direction of taper is for gas inlet.

For **Gas Range**, the regulator is located on the back of the range back panel.

For **Dual Fuel Range**, the regulator is located at the right side inside the front kick panel, while gas inlet is still located on the back panel.