

Model# HRG4808-BS
Thor Kitchen 48-inch Professional Gas Range



DIMENSION & WEIGHT

Product Dimension

Product width	47.9"
Product height (from bottom to top of back splash)	38.48"-39.48"
Product height (from bottom to top of side panel)	35.67"-36.67"
Product depth (from back panel to bullnose)	27.94"
Product depth (from back panel to control board)	26.52"
Product depth (from back panel to side panel front)	24.82"
Depth of control panel (minimum)	1.7"
Depth of control panel (bullnose)	3.12"
Cast iron cooking grate (W x L)	10 3/4" * 23"
Adjustable legs	not to exceed 1"

Required Cutout Size (W x D x H)

48 1/8" x 24.82" x 35.67(+1)"	
30" Oven Cavity Dimension	24"W * 15 1/4"H * 18"D
30" Oven Rack Dimension	22 3/4" * 15 1/2"
Distance between Oven Rack	2 1/8"

FEATURES

- Black Porcelain Drip Pan On Cook Top
- Heavy Duty Continuous Cast Iron Cooking Grates
- Automatic Re-ignition Safety Feature
- Blue LED Illuminated Knobs
- Bamboo Cutting Board fits Griddle
- Black Stainless Steel Professional Style
- Blue Porcelain Oven Interior
- 2 x Halogen Lights
- Commercial Convection Fan

15K (650 BTU Simmer)	15K Griddle	15K (650 BTU Simmer)	15K (650 BTU Simmer)
18K		18K	18K

BURNER PERFORMANCE



Total Number of Range Top Burners	6 Burners
Front Right (Single)	18,000 BTU
Front Left (Single)	18,000 BTU
Front Middle (Single)	18,000 BTU
Rear Right (Dual burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Left (Dual burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Middle (Dual burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Griddle Burner	15000 BTU
Infrared Broil burner	16500 BTU
U-shape Bake burner	22000 BTU

TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20 A
Frequency (Hz)	60 Hz

ACCESSORIES (NOT INCLUDED)

LPKHRG4808U(-BS)	Liquid Propane Gas Conversion Kit
TR30SS	30-inch Telescopic Rack
ITHRG4808-BS	48-inch Island Trim
RG1022	Cast Iron Reversible Griddle
RG1032	Cast Iron Range Griddle

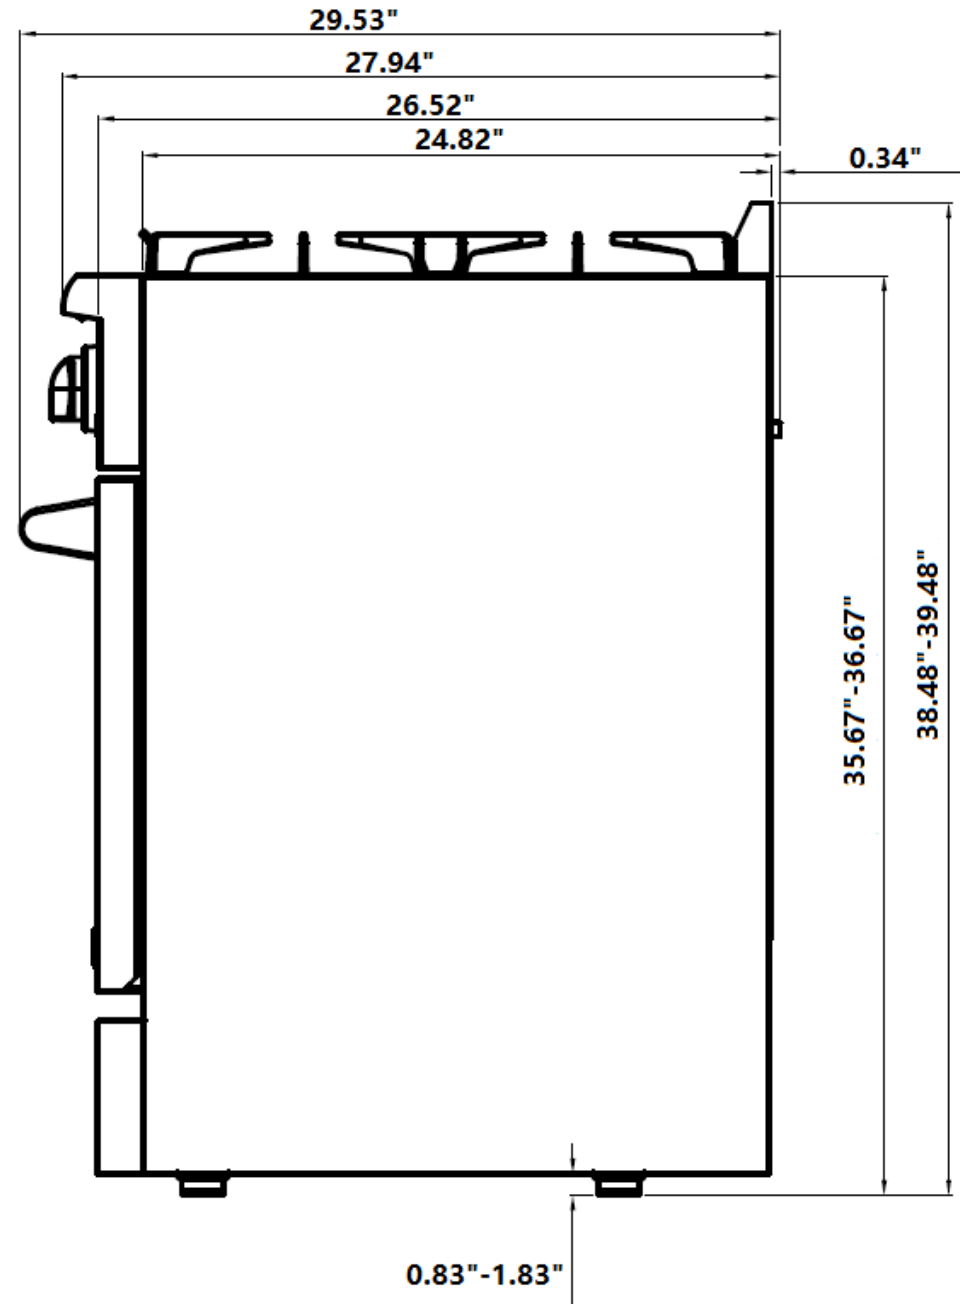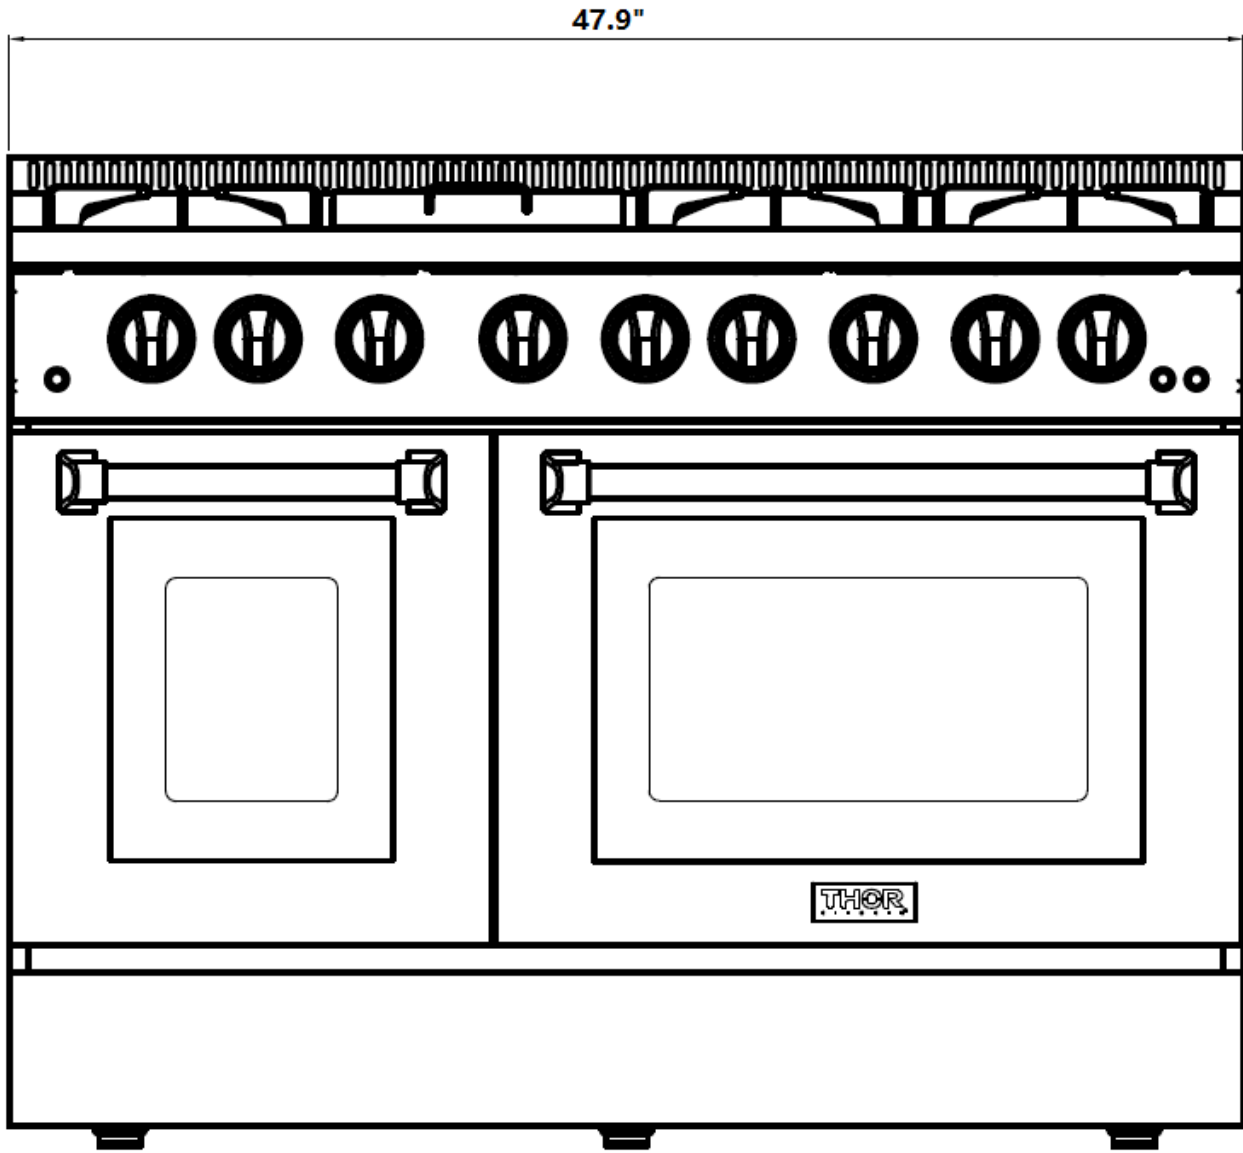

NG: Input Pressure: 7 inches, Output Pressure: 5 inches
LP: Input Pressure: 11 inches Output Pressure: 10 inches
Size of Regulator: ¾ inch

