

Model# HRD3606U

Thor Kitchen 36-inch Professional Dual Fuel Range



DIMENSION & WEIGHT

Product Dimension		
	Product width	36"
	Product height (from bottom to top of back splash)	38.47"- 39.47"
	Product height (from bottom to top of side panel)	35.91"- 36.91"
	Product depth (from back panel to bullnose)	27.86"
	Product depth (from back panel to control panel)	26.47"
	Product depth (from back panel to front of side panel)	24.19"
	Depth of control panel (to the control panel face)	2.28"
	Depth of control panel (to the bullnose)	3.67"
	Cast iron cooking grate (W x L)	10 3/4" * 23"
	Adjustable legs	Recommend not to exceed 1"
Required Cutout Size (W x D x H)		36 1/8" x 24.19" x 35.91(+1)"
	Oven Cavity Dimension	30" W * 15 1/4" H * 18" D
	Oven Rack Dimension	28 3/4" * 15 1/2"
	Distance between Oven Rack	2 1/8"

FEATURES

Black Porcelain Drip Pan On Cook Top
 Heavy Duty Continuous Cast Iron Cooking Grates
 Automatic Re-Ignition Safety Feature
 Blue LED Light up the knobs
 Zinc Alloy black Controller Knobs
 Heavy Duty handle with Zinc Alloy holder
 Stainless-Steel Professional style
 Blue porcelain oven interior
 2 x Halogen Lights
 Commercial convection fan

15K (650 BTU Simmer)	12K	15K (650 BTU Simmer)
18K	18K	18K

BURNER PERFORMANCE

Total Number of Range Top Burners	6 Burners
Front Right (Single)	18,000 BTU
Front Left (Single)	18,000 BTU
Front Middle (Single)	18,000 BTU
Rear Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Left (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Middle (Single)	12,000 BTU

OVEN PERFORMANCE



Oven Capacity	5.2 cu. Ft
Bake Power	850 W (Top) / 3,000 W (Bottom)
Broil Power	3,500 W

TECHNICAL DETAILS


Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	240V, 4-Prong 14-50R Power Outlet
Circuit Breaker (A)	30A
Frequency (Hz)	60 Hz

ACCESSORIES (NOT INCLUDED)


LPKHRD3606U	Liquid Propane Gas Conversion Kit
TR36SS	36-inch Telescopic Rack
ITHRD3606U	36-inch Island Trim
RG1022	Cast Iron Reversible Griddle

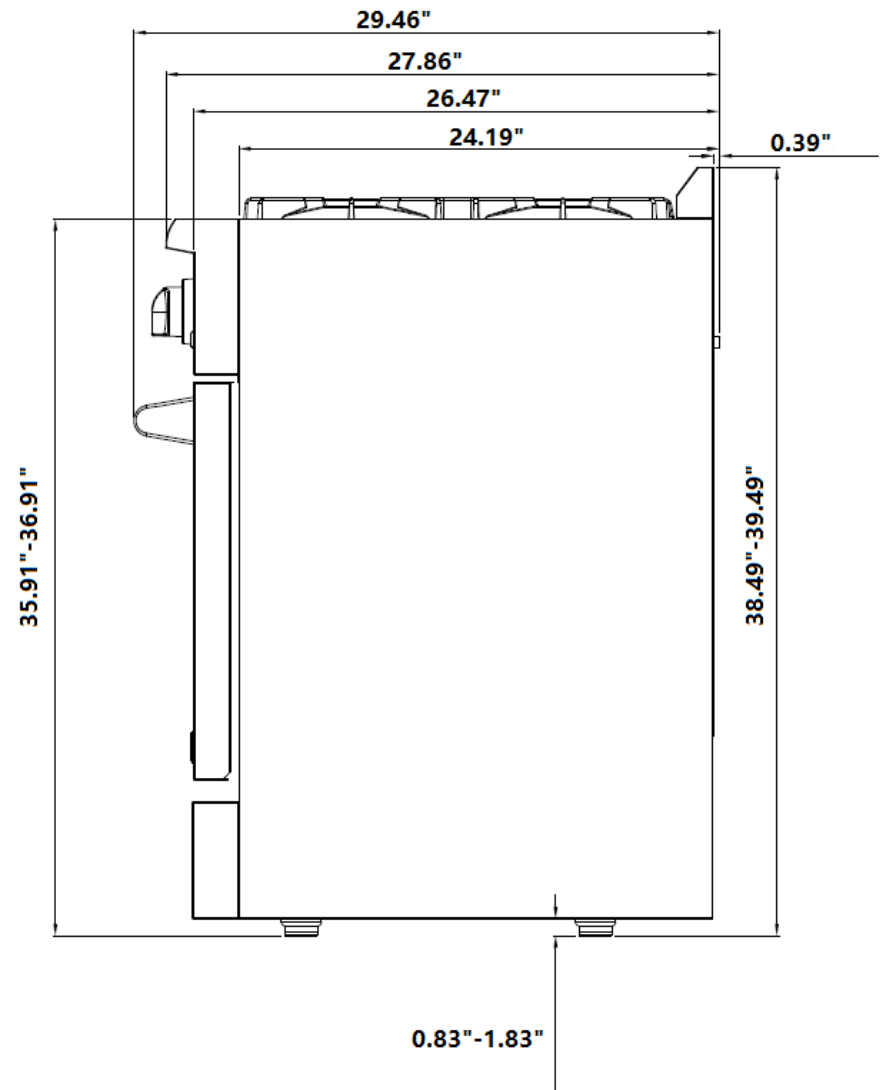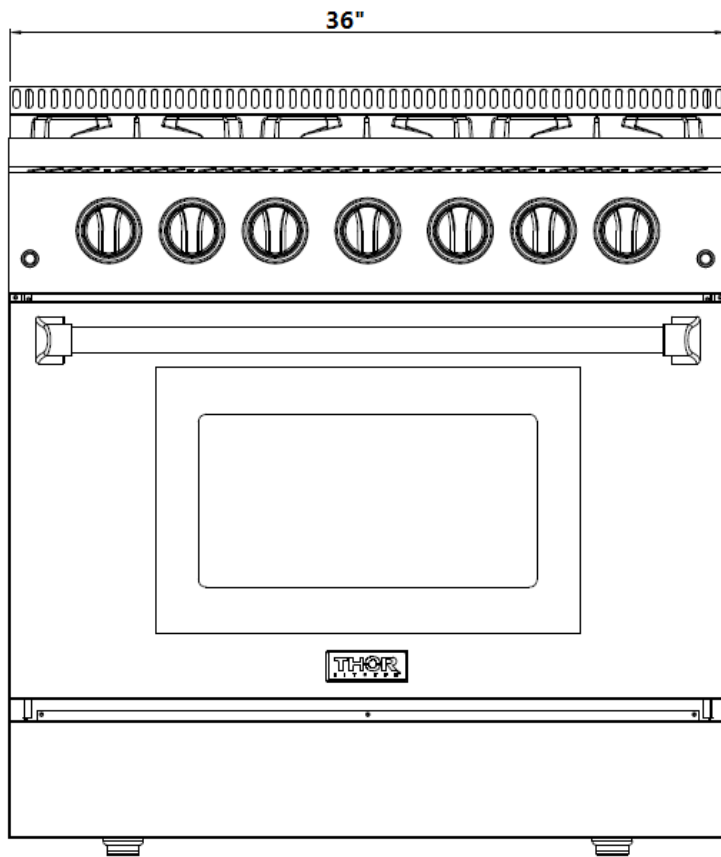

NG: Input Pressure: 7 inches, Output Pressure: 5 inches
LP: Input Pressure: 11 inches Output Pressure: 10 inches
Regulator Location: Inside the kick Panel – Bottom Right
Size of Regulator: ½ inch

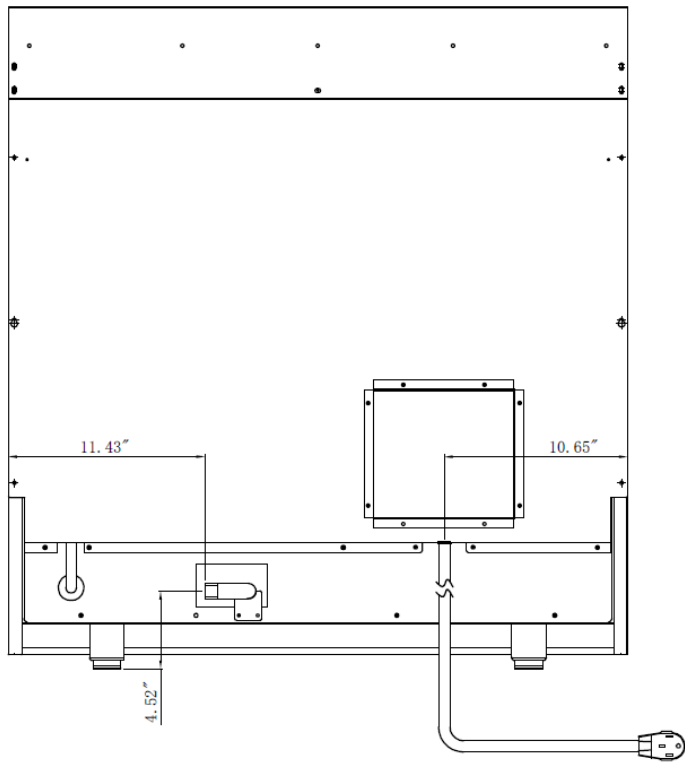

*No 240V, 4-Prong 14-50R Power Outlet
 Is provided with the product

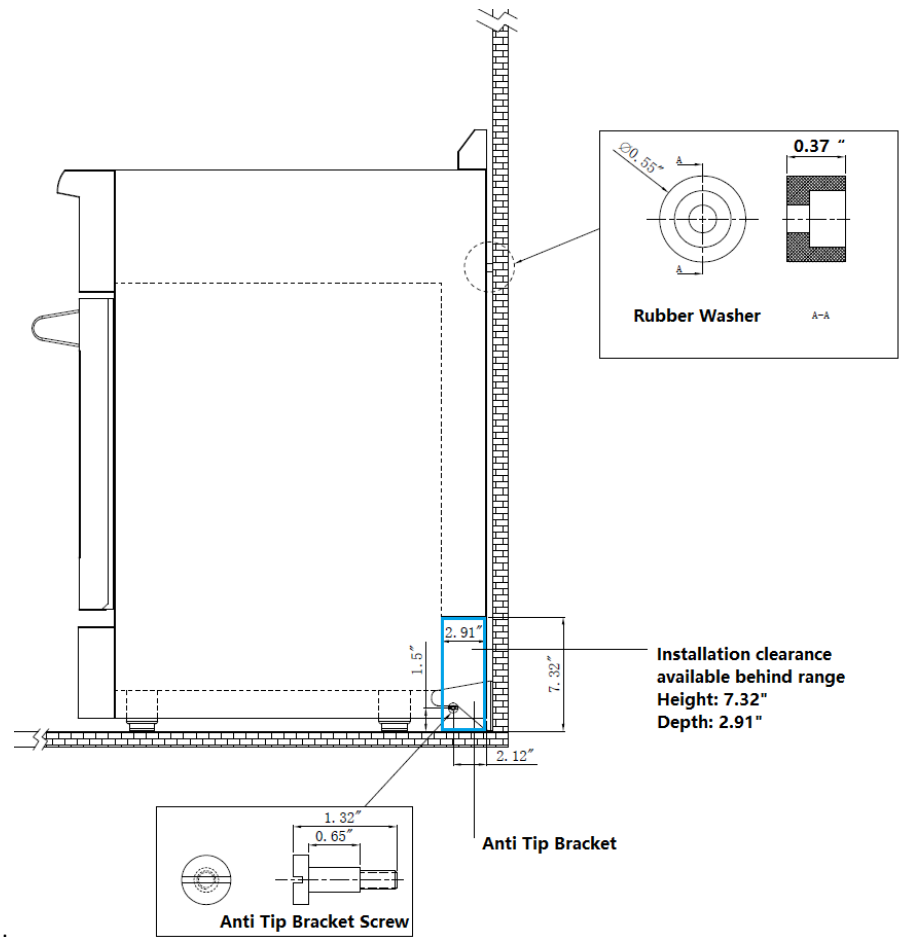

**Installation clearance
 available behind range
 Height: 7.32"
 Depth: 2.91"**