

Model# HRD4803U

Thor Kitchen 48-inch Professional Dual Fuel Range



DIMENSION & WEIGHT

Product Dimension	
Product width	47.9"
Product height (from bottom to top of back splash)	38.47" - 39.47"
Product height (from bottom to top of side panel)	35.91" - 36.91"
Product depth (from back panel to bullnose)	27.86"
Product depth (from back panel to control panel)	26.47"
Product depth (from back panel to front of side panel)	24.19"
Depth of control panel (to the control panel face)	2.28"
Depth of control panel (to the bullnose)	3.67"
Cast iron cooking grate (W x L)	10 3/4" * 23"
Adjustable legs	Recommend not to exceed 1"
Required Cutout Size (W x D x H)	48 1/8" x 24.19" x 35.91(+1)"
30" Oven Cavity Dimension	24"W * 15 1/4"H * 18"D
30" Oven Rack Dimension	22 3/4" * 15 1/2"
Distance between Oven Rack	2 1/8"

FEATURES

- Black Porcelain Drip Pan On Cook Top
- Heavy Duty Continuous Cast Iron Cooking Grates
- Automatic Re-Ignition Safety Feature
- Blue LED Light up the knobs
- Zinc Alloy black Controller Knobs
- Heavy Duty handle with Zinc Alloy holder
- Stainless-Steel Professional Style
- Blue porcelain oven interior
- 2 x Halogen Lights
- Commercial convection fan

12K	15K Griddle	12K	15K (650 BTU Simmer)
18K		15K (650 BTU Simmer)	18K

BURNER PERFORMANCE

Total Number of Range Top Burners	6 Burners
Front Right (Single)	18,000 BTU
Front Left (Single)	18,000 BTU
Front Middle (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Left (Single)	12,000 BTU
Rear Middle (Single)	12,000 BTU
Stainless Steel Griddle	15,000 BTU

OVEN AND PERFORMANCE



Oven Capacity	6.7 cu. Ft. (4.2 cu. Ft. for 30-inch oven) (2.5 cu. Ft. for 18-inch oven)
Bake Power (30-inch oven)	850 W (Top) / 3,000 W (Bottom)
Bake Power (18-inch oven)	2,500 W (Bottom)
Broil Power (30-inch oven)	3,500 W

TECHNICAL DETAILS


Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	240V, 4-Prong 14-50R Power Outlet
Circuit Breaker (A)	40A
Frequency (Hz)	60 Hz

ACCESSORIES (NOT INCLUDED)

LPKHRD4803U	Liquid Propane Gas Conversion Kit
TR30SS	30-inch Telescopic Rack (for 30-inch oven)
ITHRD4803U	48-inch Island Trim
RG1022	Cast Iron Reversible Griddle

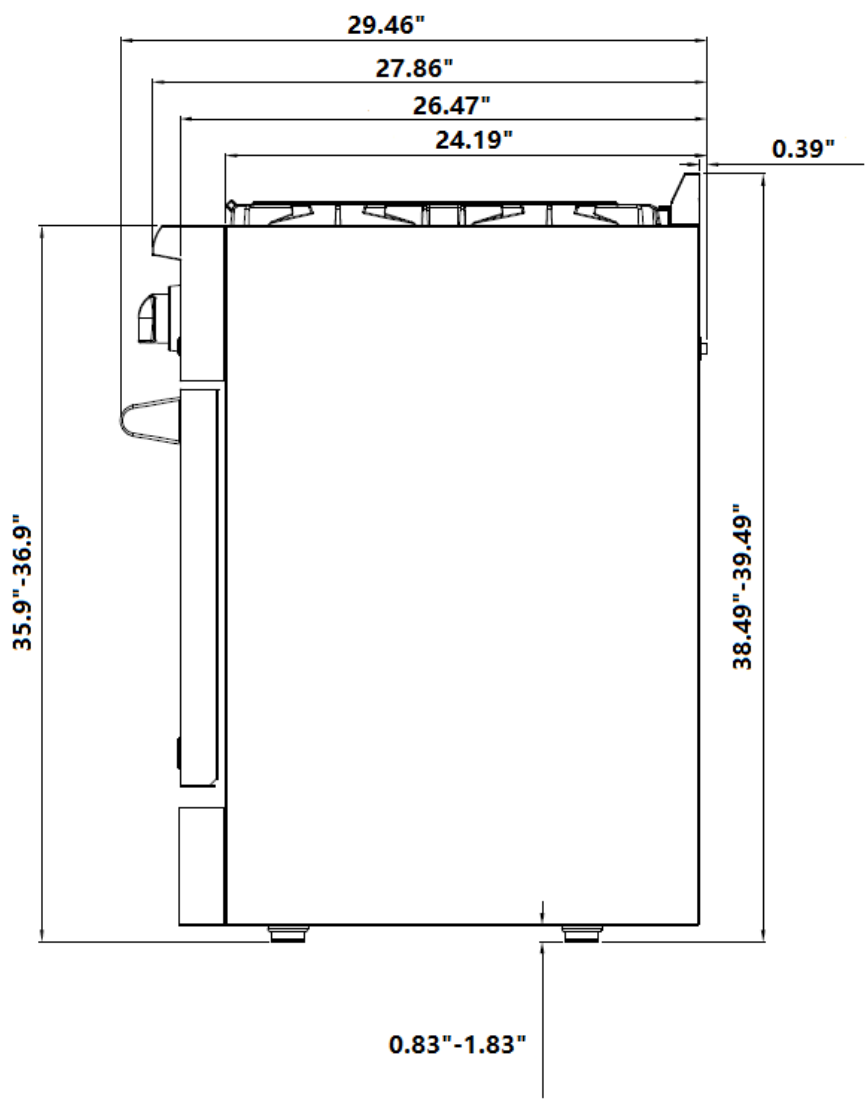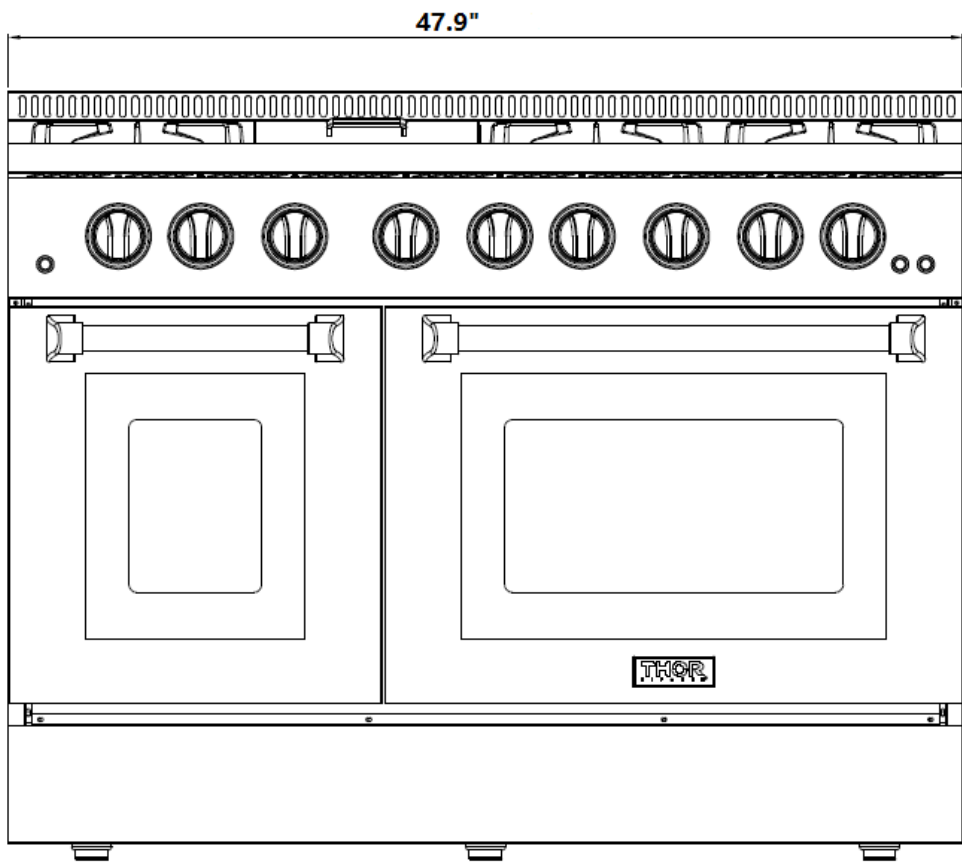

NG: Input Pressure: 7 inches, Output Pressure: 5 inches
LP: Input Pressure: 11 inches Output Pressure: 10 inches
Regulator Location: Inside the kick Panel – Bottom Right
Size of Regulator: ½ inch

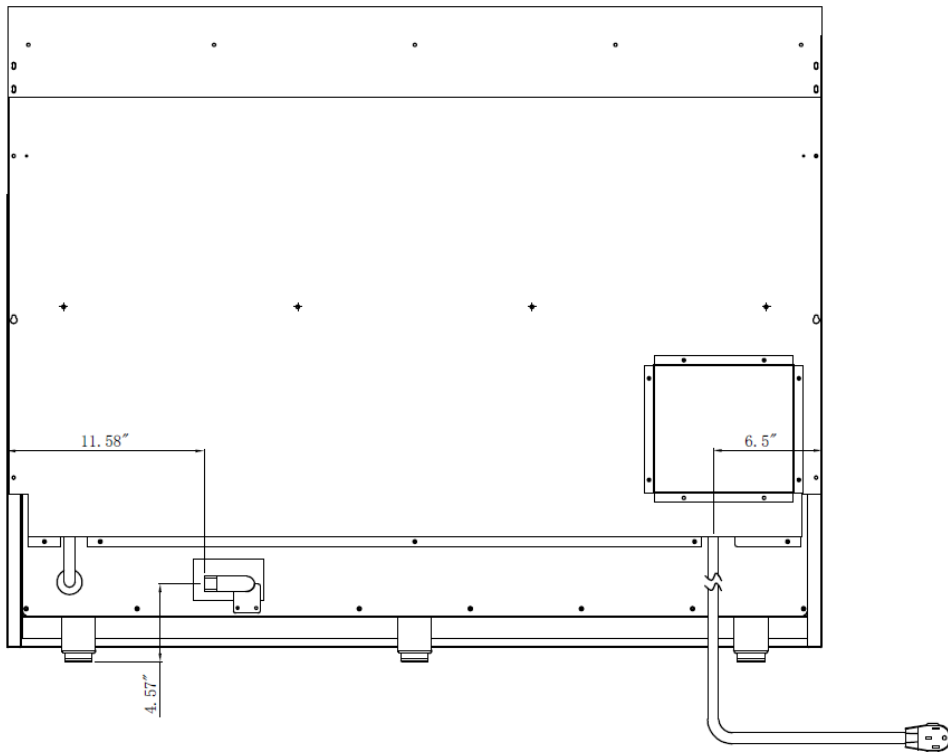

*No 240V, 4-Prong 14-50R Power Outlet
 Is provided with the product

