# Model# HRG4808U

# Thor Kitchen 48-inch Professional Gas Range



## **DIMENSION & WEIGHT**

#### **Product Dimension**

Product width	47.9"
Product height (from bottom to top of back splash)	38.48"-39.48"
Product height (from bottom to top of side panel)	35.67"-36.67"
Product depth (from back panel to bullnose)	27.94"
Product depth (from back panel to control board)	26.52"
Product depth (from back panel to side panel front)	24.82"
Depth of control panel (minimum)	1.7"
Depth of control panel (bullnose)	3.12"
Cast iron cooking grate (W x L)	10 3/4" * 23"

Adjustable legs

#### Required Cutout Size (W x D x H)

48 1/8" x 24.82" x 35.67(+1)" 30" Oven Cavity Dimension 30" Oven Rack Dimension Distance between Oven Rack 48 1/8" x 24.82" x 35.67(+1)" 24"W \* 15 1/4"H \* 18"D 22 3/4" \* 15 1/2" 2 1/8"

not to exceed 1"

#### FEATURES

Black Porcelain Drip Pan On Cook Top

Heavy Duty Continuous Cast Iron Cooking Grates

Automatic Re-Ignition Safety Feature

Blue LED Light up the knobs

Zinc Alloy black Controller Knobs

Heavy Duty handle with Zinc Alloy holder

Stainless-Steel Professional Style

Blue porcelain oven interior

2 x Halogen Lights

Commercial convection fan

15K (650 BTU Simmer)	15K Griddle	15K (650 BTU Simmer)	15K (650 BTU Simmer)
18K		18K	18K

#### **BURNER PERFORMANCE**


Total Number of Range Top Burners	6 Burners
Front Right (Dual)	18,000 BTU
Front Left (Dual)	18,000 BTU
Front Middle (Single)	18,000 BTU
Rear Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Left (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Rear Middle (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Griddle Burner	15,000 BTU
Infrared Broil burner	16,500 BTU
U-shape Bake burner	22,000 BTU
Tube Bake burner (18-inch oven)	14,000 BTU


#### TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible	
Electrical Requirements	120V	
Circuit Breaker (A)	15 or 20 A	
Frequency (Hz)	60 Hz	

## ACCESSORIES (NOT INCLUDED)

LPKHRG4808U	Liquid Propane Gas Conversion Kit
TR30SS	30-inchTelescopic Rack
ITHRG4808U	48-inch Island Trim
RG1022	Cast Iron Reversible Griddle
RG1032	Cast Iron Range Griddle

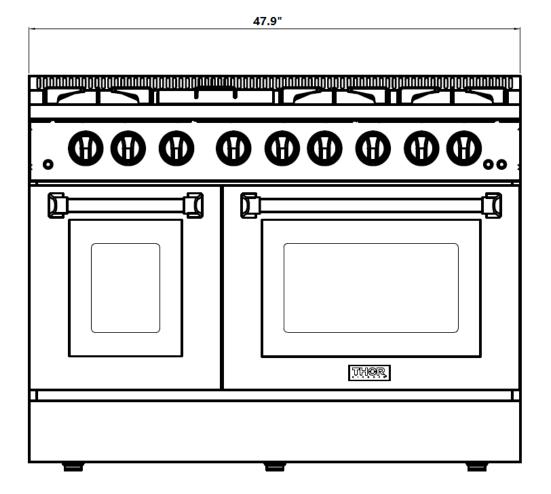

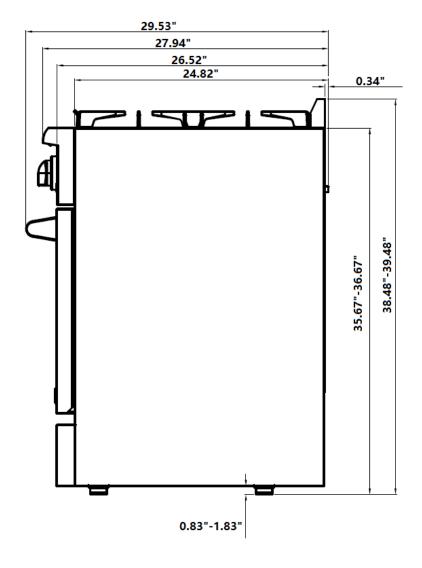

NG: Input Pressure: 7 inches, Output Pressure: 5 inches LP: Input Pressure: 11 inches Output Pressure: 10 inches

